

2024 PRODUCT CATALOG

grup
ARGE

**ENERGY AND
CONTROL SYSTEMS**

WHAT DO WE DO?



POWER FACTOR CORRECTION

We produce full and permanent solutions to reactive energy problems in businesses, with our innovative and intelligent products. This helps to reduce production and distribution infrastructure costs as businesses get rid of the reactive energy price.

ENERGY MEASUREMENT

Energy measurements for businesses need to be carried out in a healthy manner. Our power meters also provide remote monitoring and intervention via communication and contact outputs.

ENERGY MANAGEMENT

We offer different energy efficiency services with our new generation energy management system where the energy consumption of devices in enterprises can be monitored or controlled instantly with our web - based system.

CONTROL AND PROTECTION

Our control and protection product portfolio is designed to ensure the safe and effective operation of electrical systems, protect devices and manage the flow of energy.



| | |
|--|-----------|
| POWER FACTOR CORRECTION | 5 |
| Power Factor Controllers | 6 |
| Classic Power Factor Controllers | 7 |
| SVC - Enabled Power Factor Controllers | 10 |
| Power Factor Controllers with Thyristor Output | 13 |
| MV Referenced Power Factor Controllers | 15 |
| Switching | 17 |
| SVC Drivers | 18 |
| Capacitive Static Contactors | 21 |
| Inductive Static Contactors | 25 |
| Compensation Contactors | 28 |
| Shunt and Harmonic | 30 |
| Shunt Reactors | 31 |
| Harmonic Filters | 34 |
| Capacitor/Discharge Product | |
| Load Breaker/Bladed Fuse | 42 |
| Capacitors | 43 |
| Discharge Products | 46 |
| NH Fused Load Breakers | 47 |
| NH Blade Fuses | 48 |
| ENERGY MEASUREMENT | 51 |
| Analyzers | 52 |
| Multimeters | 55 |
| Voltmeters | 56 |
| Ammeters | 57 |
| XLPE Cable Type Current Transformers | 58 |
| LV Current Transformers | 60 |
| ENERGY MANAGEMENT AND AUTOMATION | 67 |
| GSM Terminals | 68 |
| Ethernet Terminals | 70 |
| GSM Automation Terminals | 72 |
| Additional Connection Products | 74 |
| Monitoring Software | 75 |
| Automation Modules | 82 |
| CONTROL AND PROTECTION | 89 |
| Astronomical Time Relays | 90 |
| Time Relays | 91 |
| Voltage Protection Relays | 93 |
| Phase Protection Relays | 94 |





POWER FACTOR CORRECTION

Electrical energy needs to be transported with least loss in its distribution from the power plant to the smallest receiver. One of the processes to reduce these energy losses and get maximum electrical energy efficiency is the compensation process.

Power Factor Controller 6

| | |
|--|----|
| Classic Power Factor Controllers | 7 |
| SVC - Enabled Power Factor Controllers | 10 |
| Power Factor Controllers with Thyristor Output | 13 |
| MV Referenced Power Factor Controllers | 15 |

Switching 17

| | |
|------------------------------|----|
| SVC Drivers | 18 |
| Capacitive Static Contactors | 21 |
| Inductive Static Contactors | 25 |
| Compensation Contactors | 28 |

Shunt and Harmonic 30

| | |
|------------------|----|
| Shunt Reactors | 31 |
| Harmonic Filters | 34 |

Capacitor/Discharge Product Load Breaker/Bladed Fuse 42

| | |
|------------------------|----|
| Capacitors | 43 |
| Discharge Products | 46 |
| NH Fused Load Breakers | 47 |
| Blade Fuses | 48 |



POWER FACTOR CONTROLLER

Power Factor Controller

The power factor controllers produced by our company have been developed with the experience and knowledge gained over many years to provide innovative and permanent solutions according to the needs of today's businesses.

Our classic power factor controllers, which are offered with 12, 18 and 24 steps options, are sufficient for businesses where loads are somewhat more stable.

SVC-enabled power factor controllers provide effective solutions in enterprises where loads are variable, phases are unbalanced and capacitive characteristic loads are predominant.

In enterprises where there are fast variable loads, power factor controllers with thyristor output can be used, as it is not possible to respond by switching with mechanical contactors.

MV Referenced smart power factor controllers, where the current is measured from the medium voltage line, provide complete and precise results in enterprises where the meter is installed at medium voltage side and consumption is low according to transformer power.

Key Features

- **Measurement Accuracy:** (CI): 0.5
- **Protection Class:** IP40
- **Measurement Current Range:** 3 mA – 5.5 Amps
- **Power Factor Controller Contact Output:** 3A – 240 V AC
- **Operating Frequency:** 50 – 60 Hz
- **Power Consumption:** 0.7 – 3.7 VA
- **Generator Input:** 110 – 250 V AC (for 18 - steps power factor controllers)
- **Power Consumption:** 0.7 – 3.7 VA
- **Setting Limit:** Ind: 1% - 100%, Cap: 1% - 100%
- **Current Transformer Ratio:** 5/5...10.000 / 5A
- **Ambient Temperature:** -10°C / +60°C
- **Operating Voltage:** 230 V AC (Phase - Neutral), 400 V AC (Phase - Phase).
- **Operating Voltage Range:** (0.8 – 1.1) xU

Power Factor Controllers;

- 3mA detection current.
 - High accuracy power measurement.
 - Reactive Power Profile (RPP) property.
 - Extend step service life with step co-aging.
 - Updating the step values with automatic step test.
- with such features, it produces economical and permanent solutions for your business.

The reactive energy requirement in enterprises where the loads in the enterprises are not variable and the load imbalance between phases can be eliminated with a small number of single-phase steps can be responded with classical smart power factor controllers. According to the number of steps required by the enterprise, an effective result can be obtained by choosing the appropriate 12-18 steps smart power factor controllers and 12 - 18 - 24 steps power factor controllers.

Application Areas

- Trading Houses
- Markets
- Small-Scale Enterprises
- Small Workshops



RKR 18



Smart 12




Smart 18

Technical Features


| Product Code | Product Name | Product Description | Step Count | Character LCD | Graphic LCD | 7-Segment (3x4) | Power Flow Graph | RS-485 Communication | Generator Trigger |
|--------------|--------------|--|------------|---------------|-------------|-----------------|------------------|----------------------|-------------------|
| GA110 | SMART 12 | 12 STEPS SMART POWER FACTOR CONTROLLER | 12 | ✓ | | | ✓ | ✓ | |
| GA122 | SMART 18 | 18 STEPS SMART POWER FACTOR CONTROLLER | 18 | | ✓ | | ✓ | ✓ | ✓ |
| GA1101 | RKR 12 | 12 STEPS POWER FACTOR CONTROLLER | 12 | | | | ✓ | ✓ | ✓ |
| GA1102 | RKR 18 | 18 STEPS POWER FACTOR CONTROLLER | 18 | | | | ✓ | ✓ | ✓ |
| GA1103 | RKR 24 | 24 STEPS POWER FACTOR CONTROLLER | 24 | | | | ✓ | ✓ | ✓ |

Technical Drawing

Smart 12 Power Factor Controller

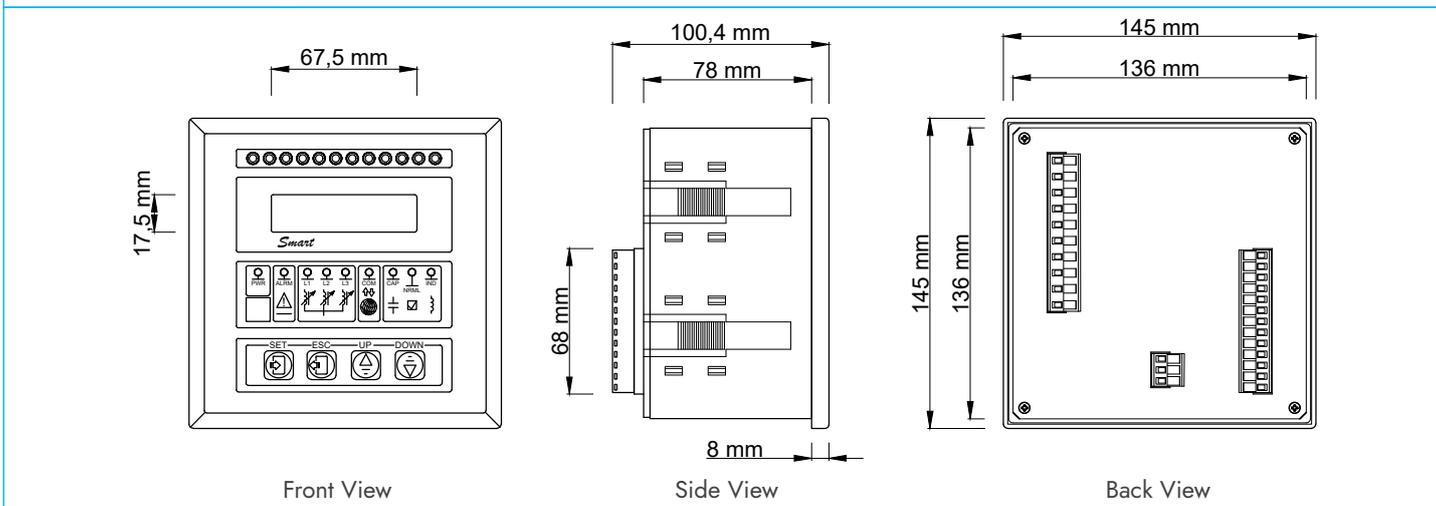


Smart 18 Power Factor Controller

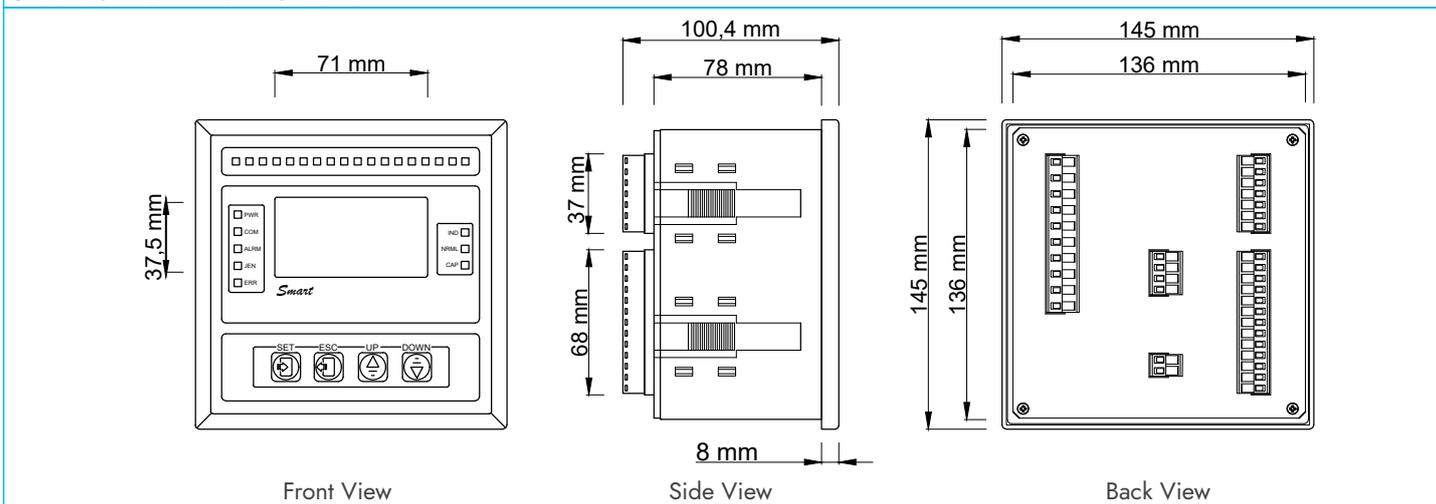


Technical Drawing

RKR (12/18/24) Power Factor Controller

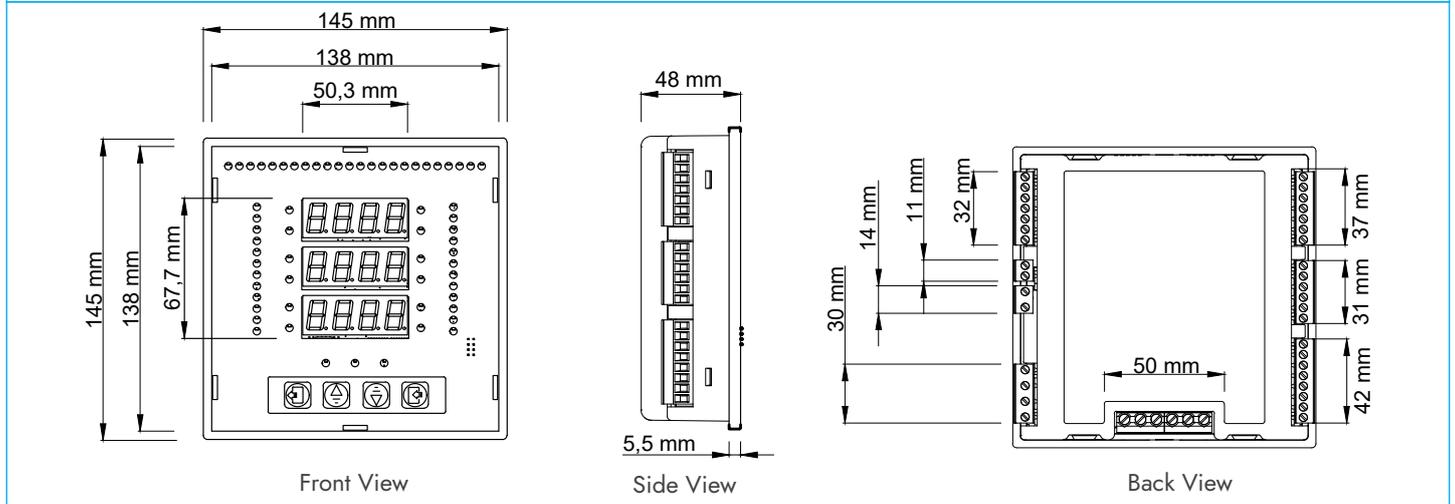


Connection Diagram

Smart 12 Power Factor Controller

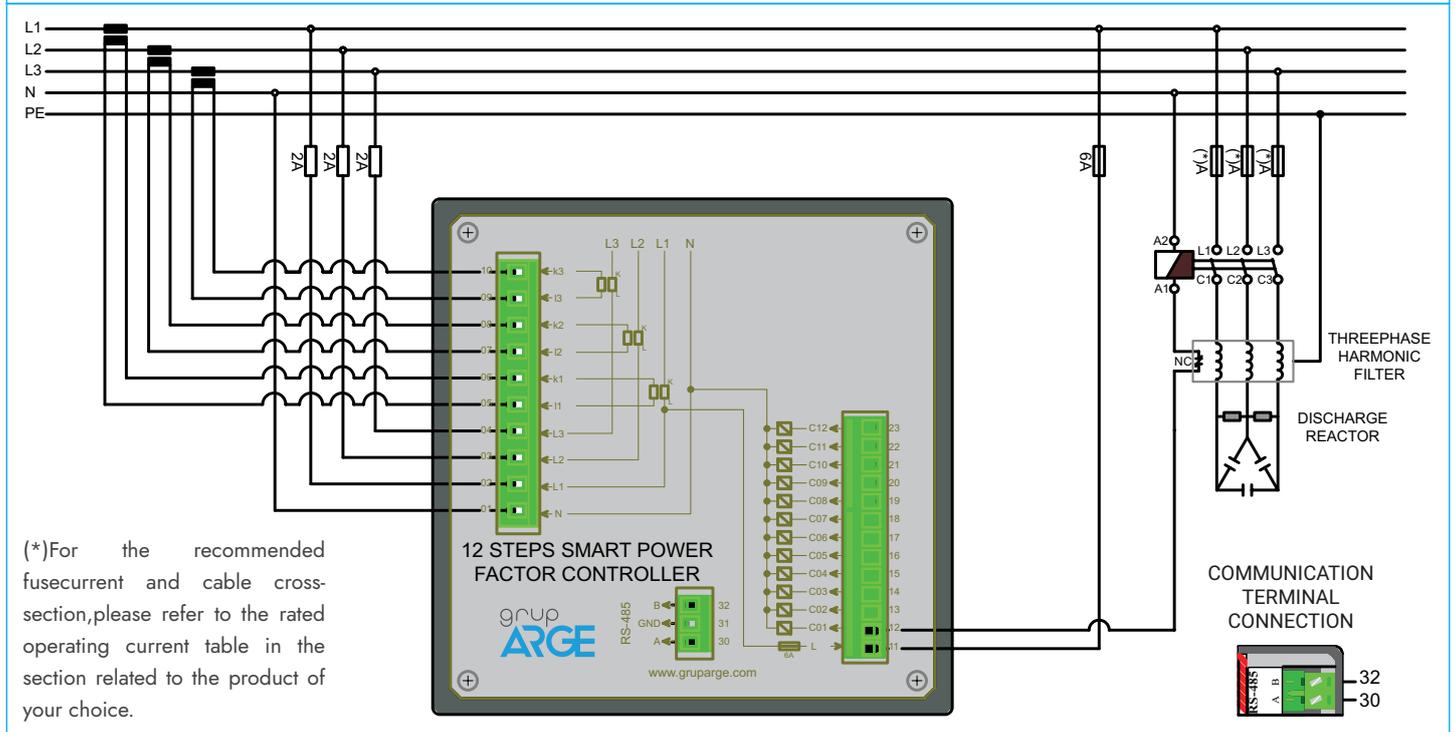


Connection Diagram

Smart 18 Power Factor Controller

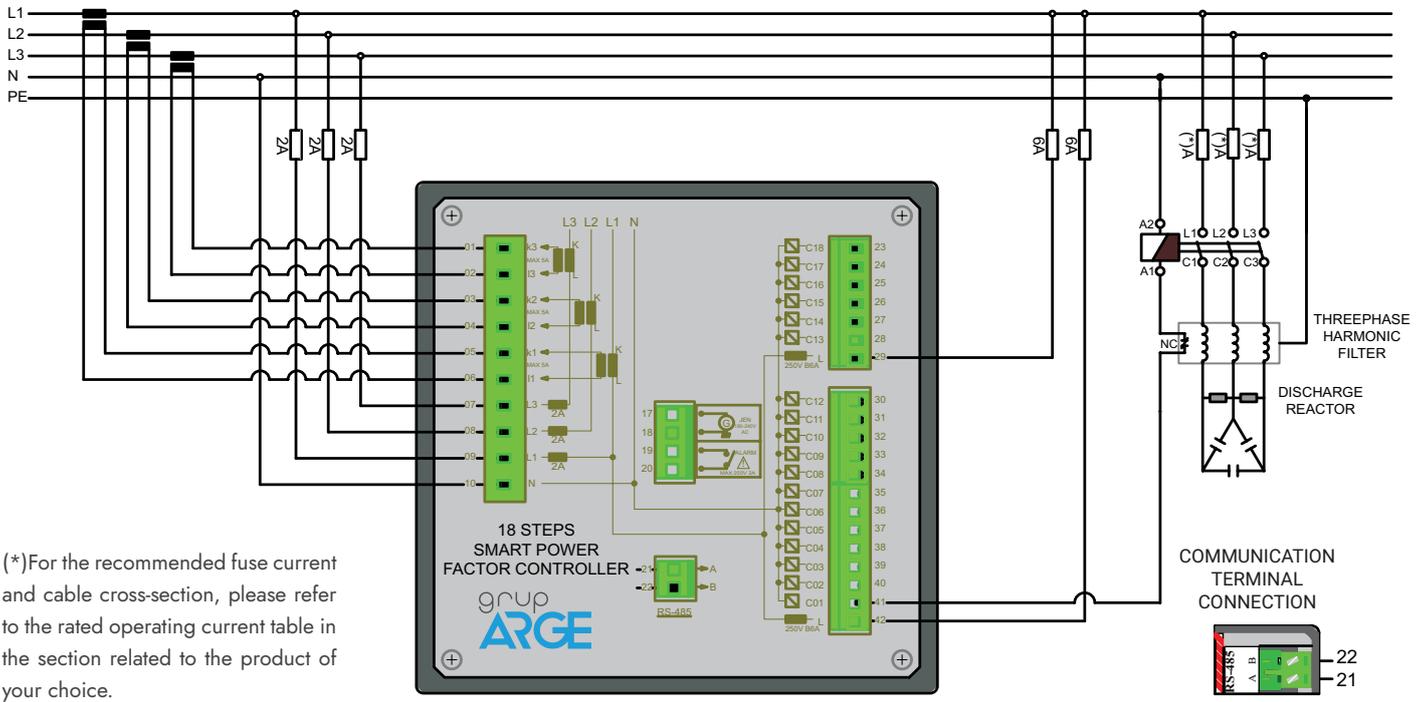

RKR (12/18/24) Power Factor Controller

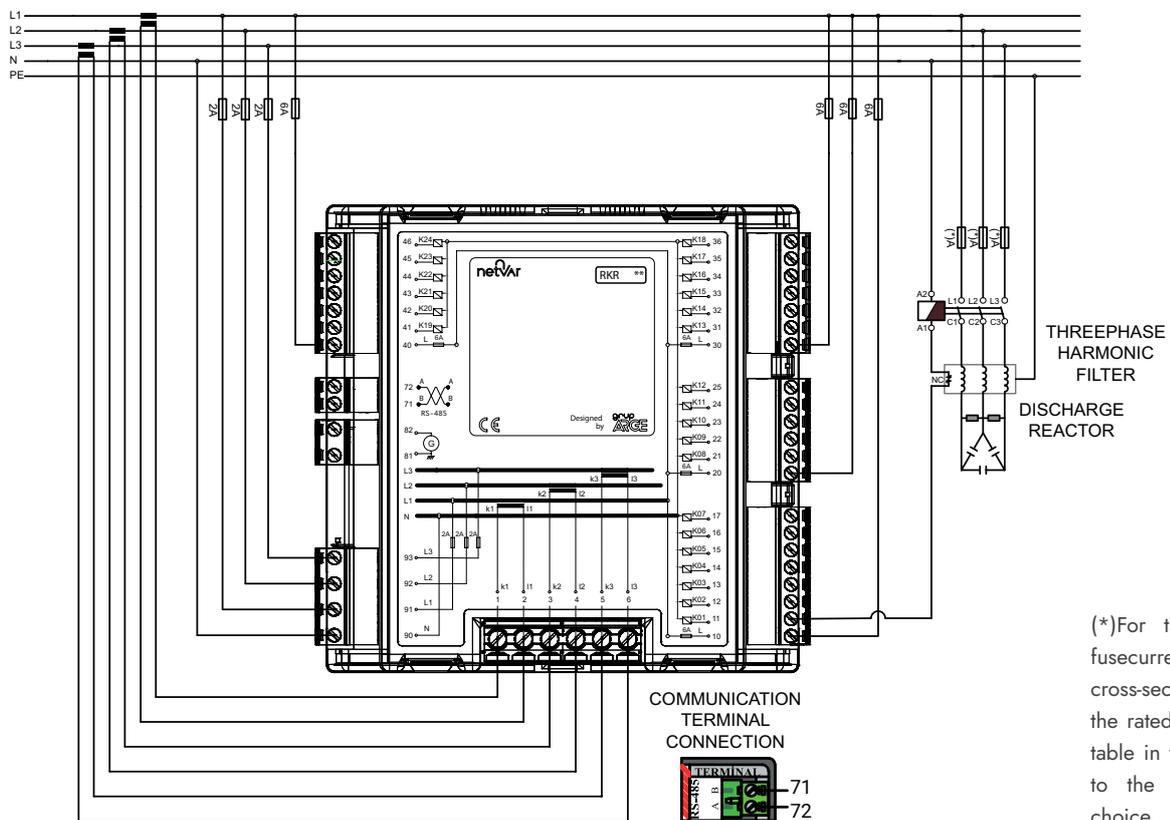

In order to meet the reactive energy requirement of the enterprises where the loads are variable and the phase distribution is not equal and the capacitive load generating device equipment is predominant, SVC power factor controllers that activate the inductive loads in an adjustable way should be used. The magnitude of the inductive load driver and monophase shunt reactor to be used in the SVC system in the enterprise may vary according to the inductive load requirement and load imbalance of the enterprise.

Application Areas

- Banks
- Petrol Stations
- Süpermarkets
- Hospitals
- Schools
- Elevator Systems
- Public Buildings
- Offices
- Shopping Centers
- Social Facilities



RKR S18



Smart S12



Smart S18

Technical Features

| Product Code | Product Name | Product Description | Step Count | Character LCD | Graphic LCD | TFT Color Display | Harmonic Measurement | SVC | Power Flow Graph | Reactive Power Profile | RS-485 Communication | Generator Trigger |
|--------------|--------------|--|------------|---------------|-------------|-------------------|----------------------|-----|------------------|------------------------|----------------------|-------------------|
| GA111 | SMART S12 | 12 STEPS SMART SVC-ENABLED POWER FACTOR CONTROLLER | 12 + SVC | ✓ | | | | ✓ | ✓ | ✓ | | |
| GA121 | SMART S18 | 18 STEPS SMART SVC-ENABLED POWER FACTOR CONTROLLER | 18 + SVC | | ✓ | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| GA1201 | RKR S12 | 12 STEPS SVC-ENABLED POWER FACTOR CONTROLLER | 12 + SVC | | | ✓ | 63 | ✓ | | ✓ | ✓ | ✓ |
| GA1202 | RKR S18 | 18 STEPS SVC-ENABLED POWER FACTOR CONTROLLER | 18 + SVC | | | ✓ | 63 | ✓ | | ✓ | ✓ | ✓ |

Technical Drawing

Smart S12 SVC - Enabled Power Factor Controller

The drawing shows three views of the Smart S12 controller:

- Front View:** Shows a panel with a 67,5 mm wide display area and a 17,5 mm high control section below it. The control section includes a 'Smart' logo, several indicator lights, and four buttons labeled SET, ESC, UP, and DOWN.
- Side View:** Shows a depth of 100,4 mm. The main body is 78 mm wide. The mounting flange is 37 mm high, and the total height of the unit is 68 mm. The mounting holes are 8 mm apart.
- Back View:** Shows a total width of 145 mm and a main body width of 136 mm. It features two long terminal blocks and a central component.


Smart S18 SVC - Enabled Power Factor Controller

The drawing shows three views of the Smart S18 controller:

- Front View:** Shows a panel with a 71 mm wide display area and a 37,5 mm high control section below it. The control section includes a 'Smart' logo, several indicator lights, and four buttons labeled SET, ESC, UP, and DOWN.
- Side View:** Shows a depth of 100,4 mm. The main body is 78 mm wide. The mounting flange is 37 mm high, and the total height of the unit is 68 mm. The mounting holes are 8 mm apart.
- Back View:** Shows a total width of 145 mm and a main body width of 136 mm. It features two long terminal blocks and a central component.


Technical Drawing

RKR S(12/18/24) SVC - Enabled Power Factor Controller

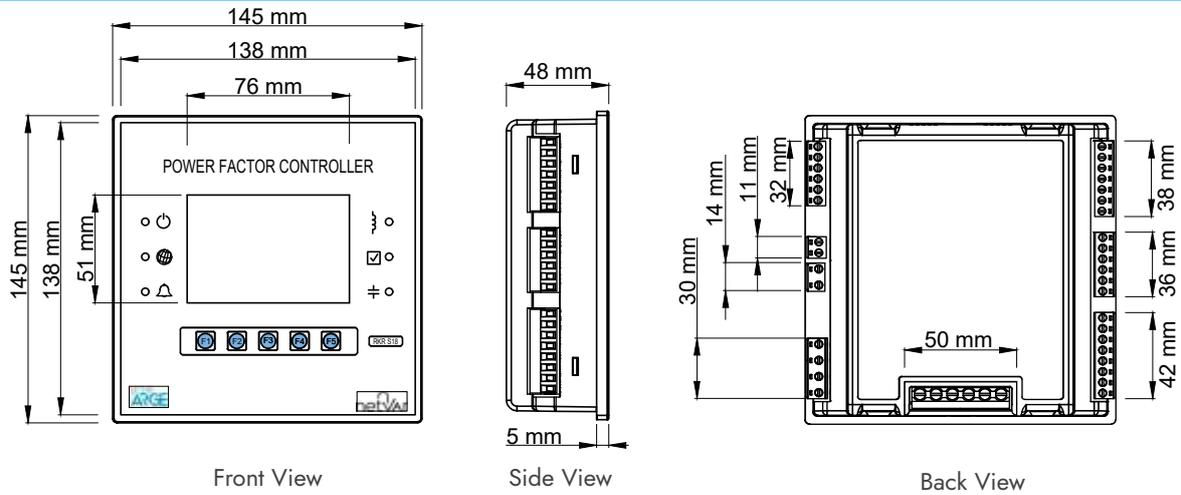

Connection Diagram


Smart S12 SVC - Enabled Power Factor Controller

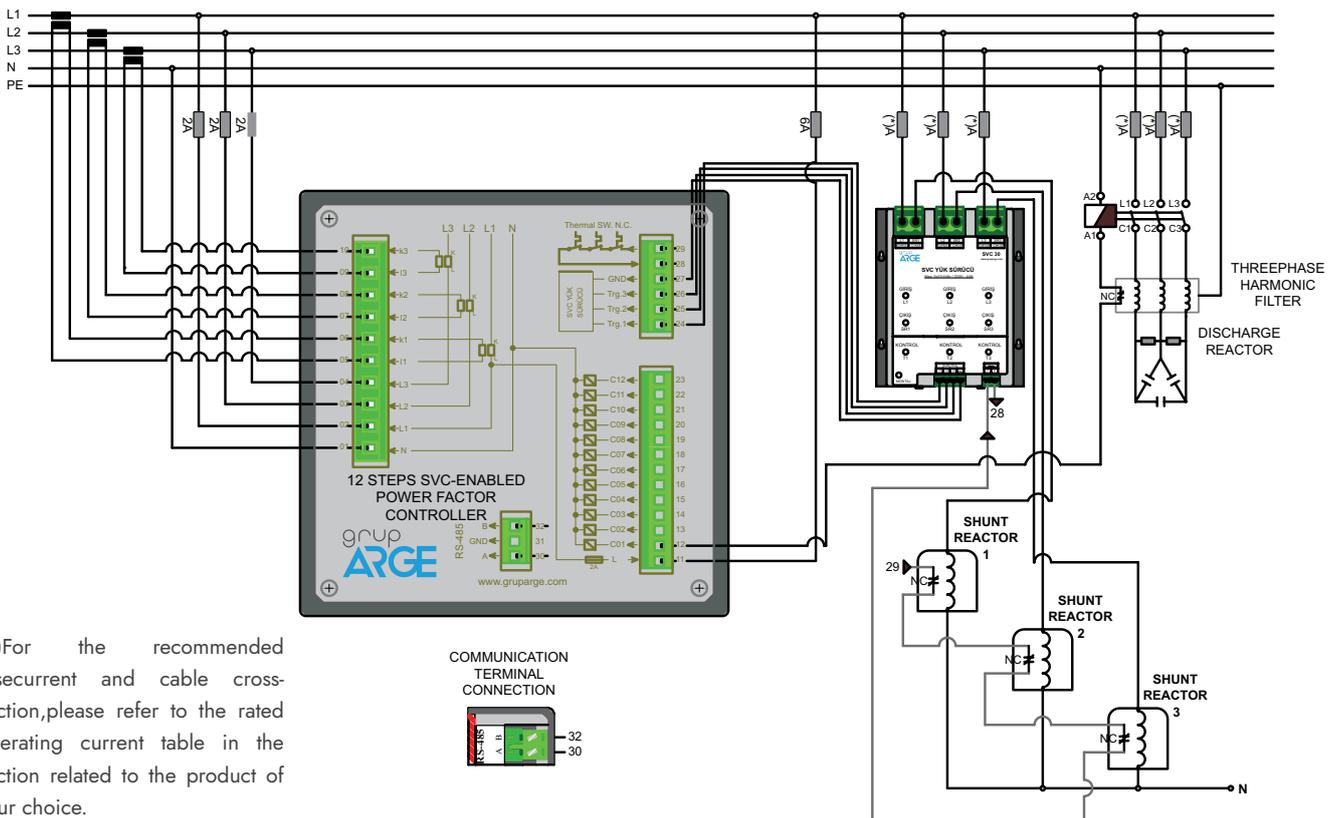


(*)For the recommended fusecurrent and cable cross-section, please refer to the rated operating current table in the section related to the product of your choice.

Connection Diagram

Smart S18 SVC - Enabled Power Factor Controller

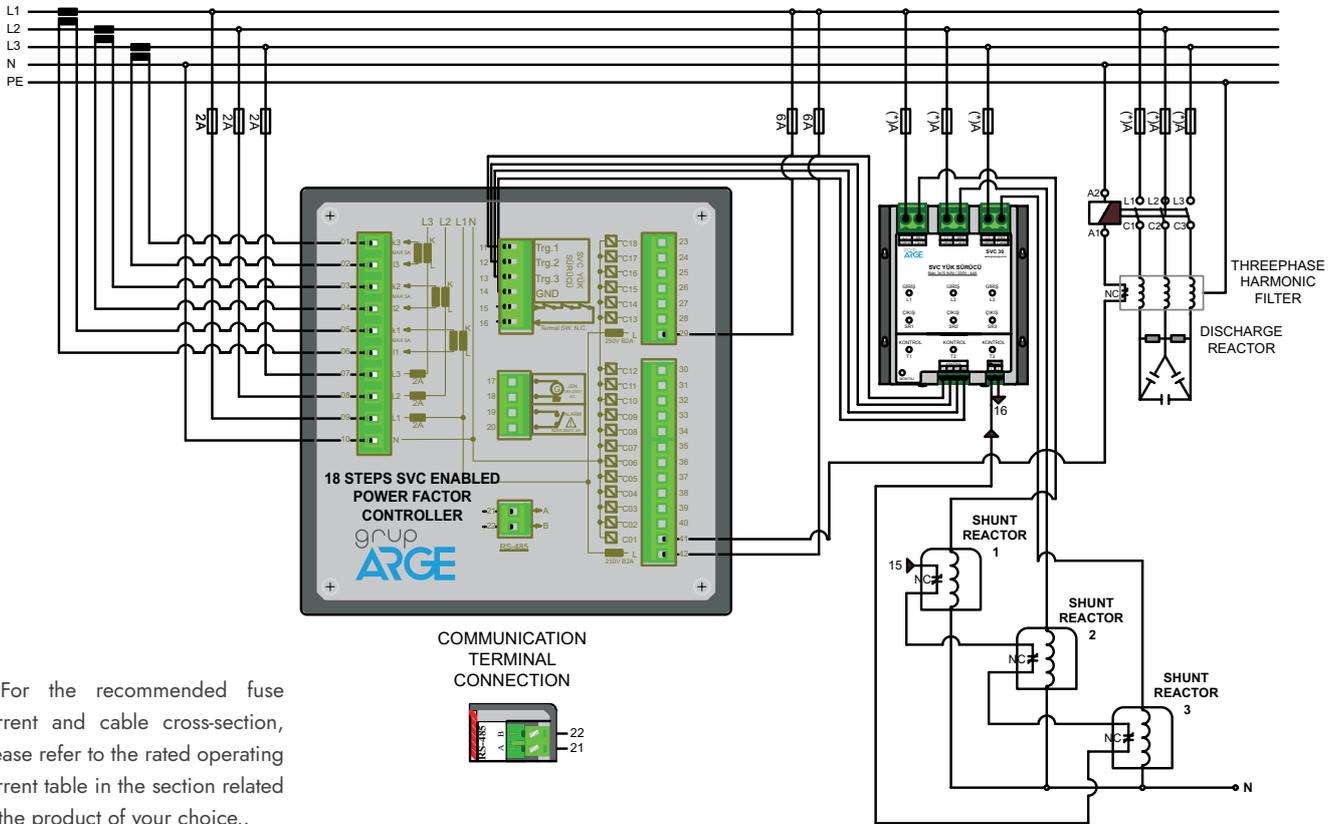

SVC - Enabled Power Factor Controller

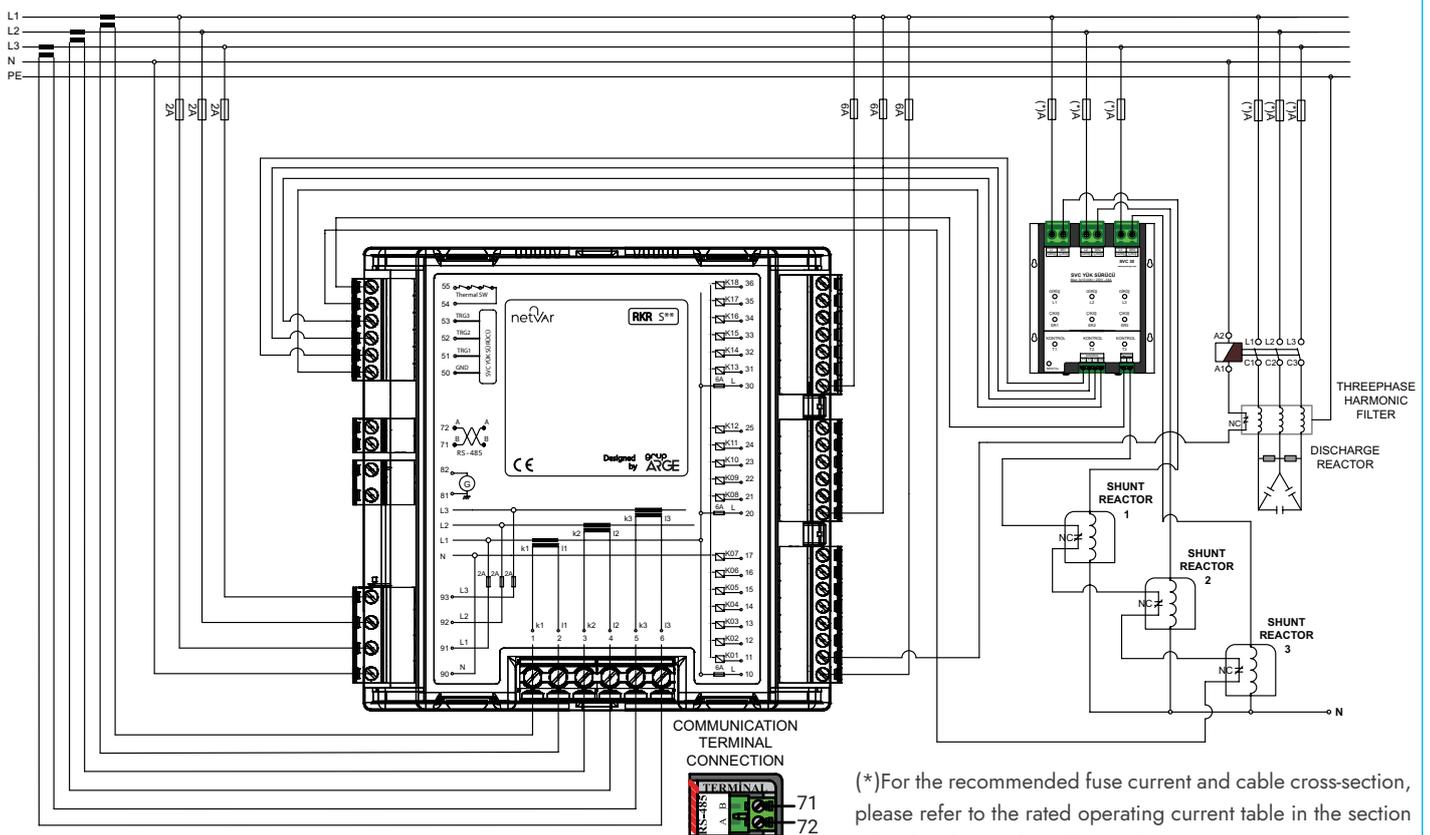

It is not possible to respond to fast variable loads by switching with mechanical contactors in classical systems. Such enterprises can only be answered by switching with a thyristor. For this purpose, smart power factor controllers with thyristor output should be used.

Application Areas

- Elevator Systems
- CNC Machine Tools
- Lathe - Leveling Workshops
- Workshops Where the Machines Are Located
- Press, Spot and welding



Smart S18-T




Smart 22-T

Technical Features

| Product Code | Product Name | Product Description | Step Count | Character LCD | | Power Flow Graph | |
|--------------|--------------|--|------------|---------------|-----|------------------|-----|
| | | | | SVC | TSC | SVC | TSC |
| GA120 | SMART S18-T | 18 STEPS SMART SVC-ENABLED POWER FACTOR CONTROLLER WITH THYRISTOR OUTPUT | 18 + SVC | ✓ | ✓ | ✓ | ✓ |
| GA130 | SMART 22-T | 22 STEPS SMART POWER FACTOR CONTROLLER WITH THYRISTOR OUTPUT | 22 | ✓ | ✓ | ✓ | ✓ |


Technical Drawing

Smart S18-T and Smart 22-T Power Factor Controllers

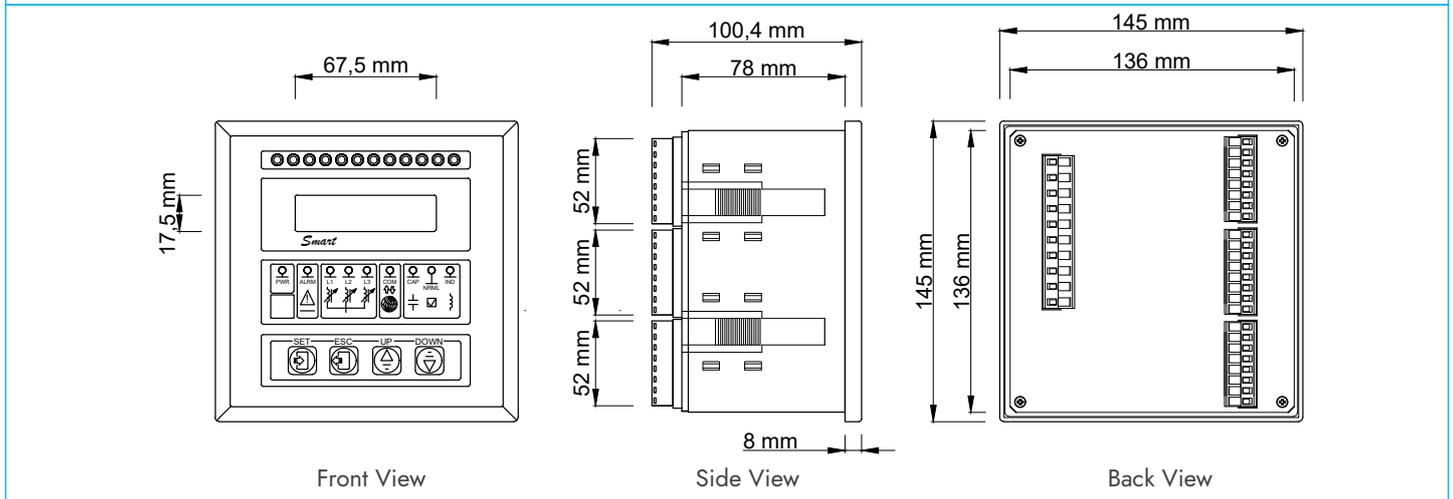

Connection Diagram

Smart S18-T SVC - Enabled Power Factor Controller With Thyristor Output

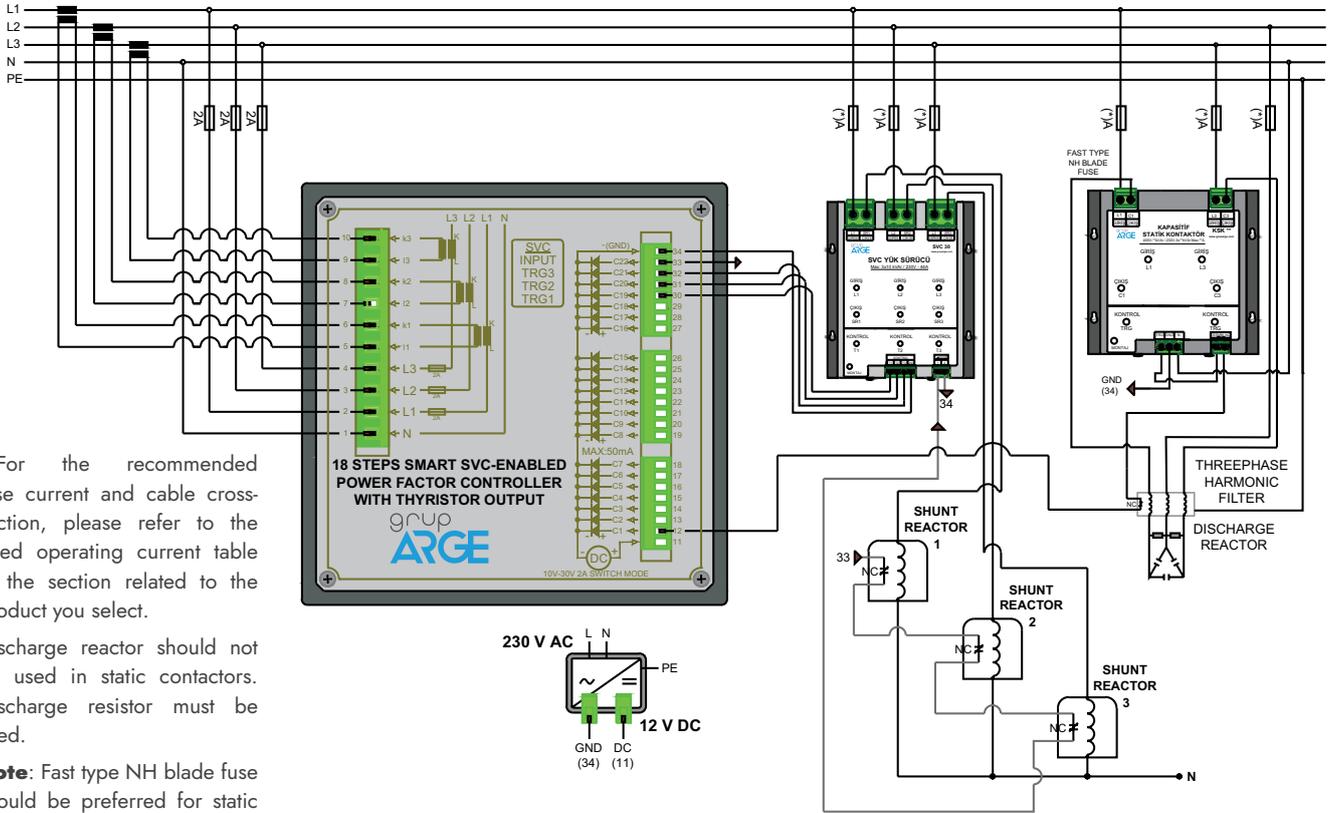


*)For the recommended fuse current and cable cross-section, please refer to the rated operating current table in the section related to the product you select.

Discharge reactor should not be used in static contactors. Discharge resistor must be used.

Note: Fast type NH blade fuse should be preferred for static contactors.

Smart 22-T Power Factor Controller With Thyristor Output

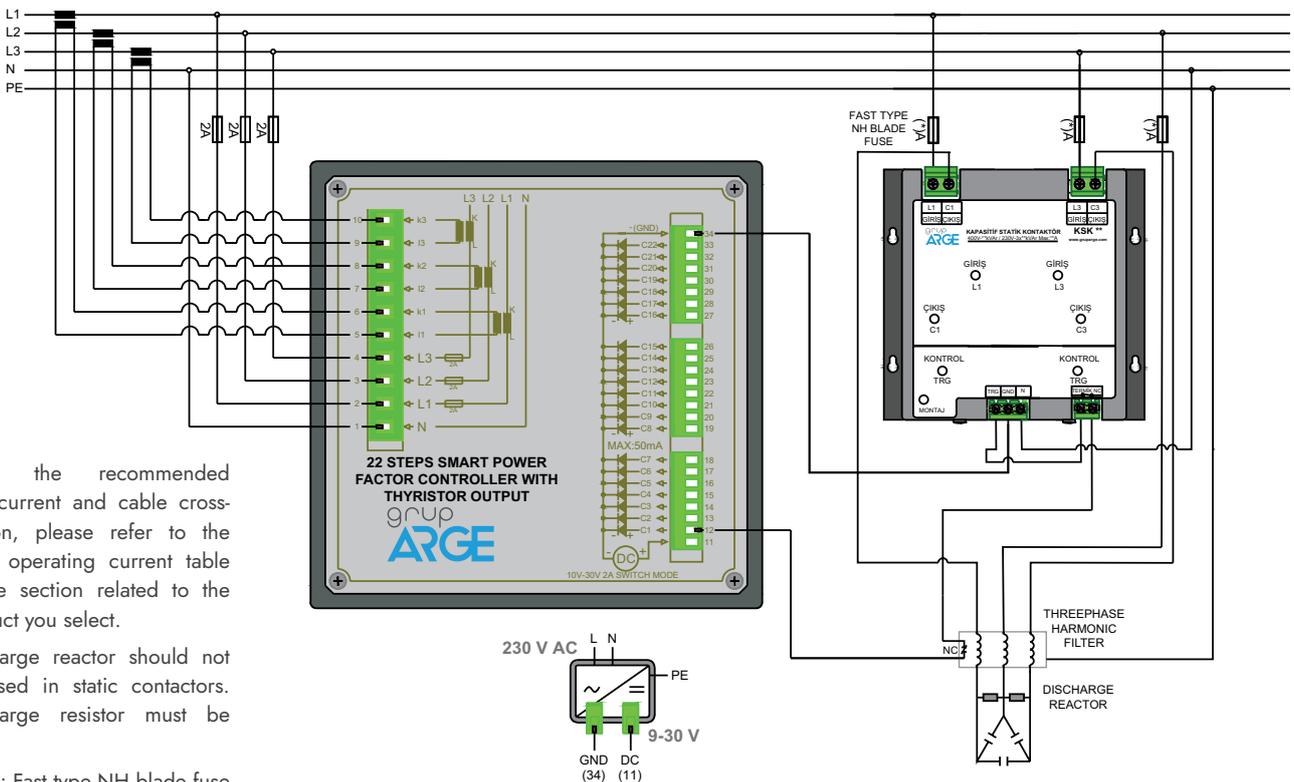

*)For the recommended fuse current and cable cross-section, please refer to the rated operating current table in the section related to the product you select.

Discharge reactor should not be used in static contactors. Discharge resistor must be used.

Note: Fast type NH blade fuse should be preferred for static contactors.

Smart SVC-Enabled MV Current Referenced Compensation System: It is a system in which current measurements are taken by medium voltage; power factor controllers, capacitor and shunt reactor compensators are located on the low voltage side. Smart SVC-Enabled MV Current Referenced Power Factor Controller receives current information from the metering current transformers located on the medium voltage side or through 3 XLPE cable type measuring current transformers to be newly installed, and voltage information from the low voltage side. The power of each phase is measured independently, taking into account the phase angle difference. As a result of this measurement, the power factor controllers produces a solution on

the low voltage side of the system by precisely using both the existing steps and the SVC outputs. As a result of the observations to be made from the meter and power factor controllers after the application, a complete solution to the reactive problem can be produced by making precise adjustments for the phases on the power factor controllers. In Solar Power Plants; during the time when electricity is not generated, consumption and power transformers caused by internal needs lead to reactive energy consumption. The low active consumption due to the equipment used results in exceeding the reactive energy limit. The reactive energy generated is compensated by Smart GES power factor controllers and the problem is solved.



Smart SOG1





Smart GES1

Technical Features

| Product Code | Product Name | Product Description | Step Count | Character LCD | Graphic LCD | SVC | Power Flow Graph | RS-485 Communication | Generator Trigger |
|--------------|--------------|--|------------|---------------|-------------|-----|------------------|----------------------|-------------------|
| GA123 | SMART SOG1 | 18 STEPS SMART SVC MV POWER FACTOR CONTROLLER-X/1 | 18+SVC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| GA124 | SMART SOG5 | 18 STEPS SMART SVC MV POWER FACTOR CONTROLLER-X/5 | 18+SVC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| GA125 | SMART OG1 | 18 STEPS SMART MV POWER FACTOR CONTROLLER-X/1 | 18 | ✓ | | | ✓ | ✓ | ✓ |
| GA126 | SMART OG5 | 18 STEPS SMART MV POWER FACTOR CONTROLLER-X/5 | 18 | ✓ | | | ✓ | ✓ | ✓ |
| GA127 | SMART GES1 | 12 STEPS SMART SVC GES POWER FACTOR CONTROLLER - X/1 | 12+SVC | ✓ | | ✓ | | ✓ | |
| GA128 | SMART GES5 | 12 STEPS SMART SVC GES POWER FACTOR CONTROLLER - X/5 | 12+SVC | ✓ | | ✓ | | ✓ | |


• In MV Reference solutions, X/1 power factor controller should be used for current transformer secondary value 1A and X/5 compatible power factor controller should be used for secondary value 5A.

Technical Drawing

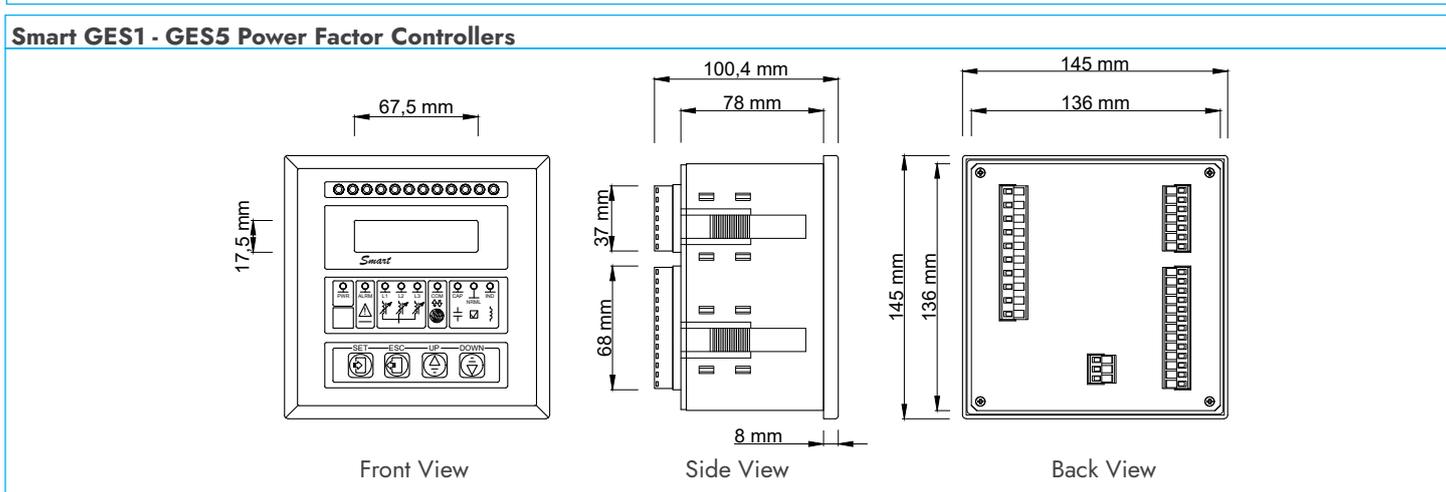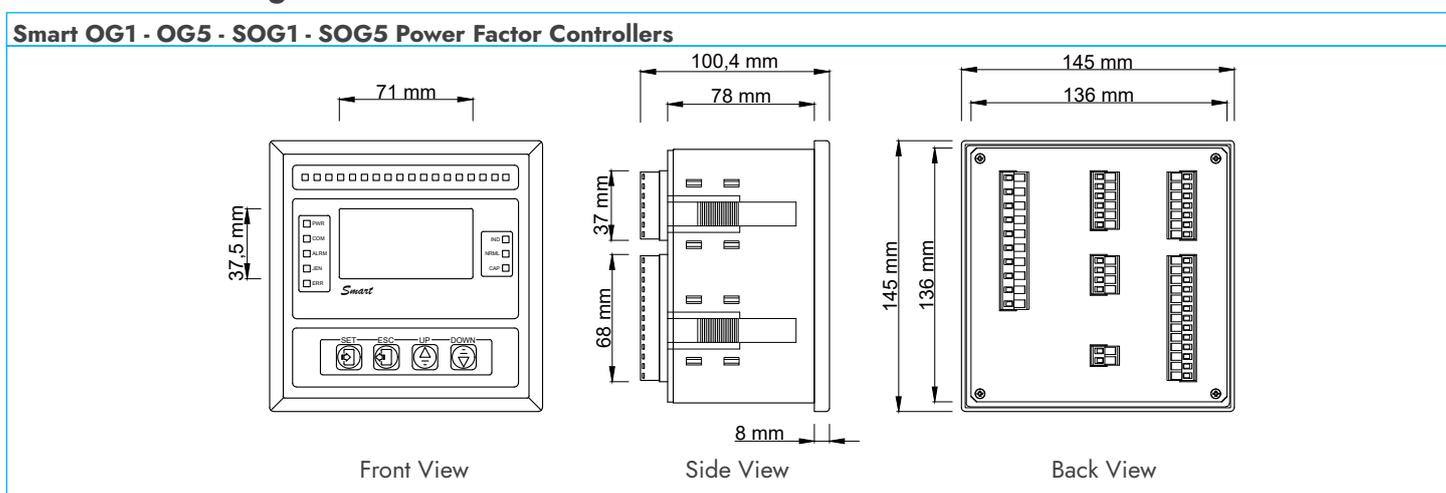

Connection Diagram


Smart OG1 - OG5 - SOG1 - SOG5 Power Factor Controllers

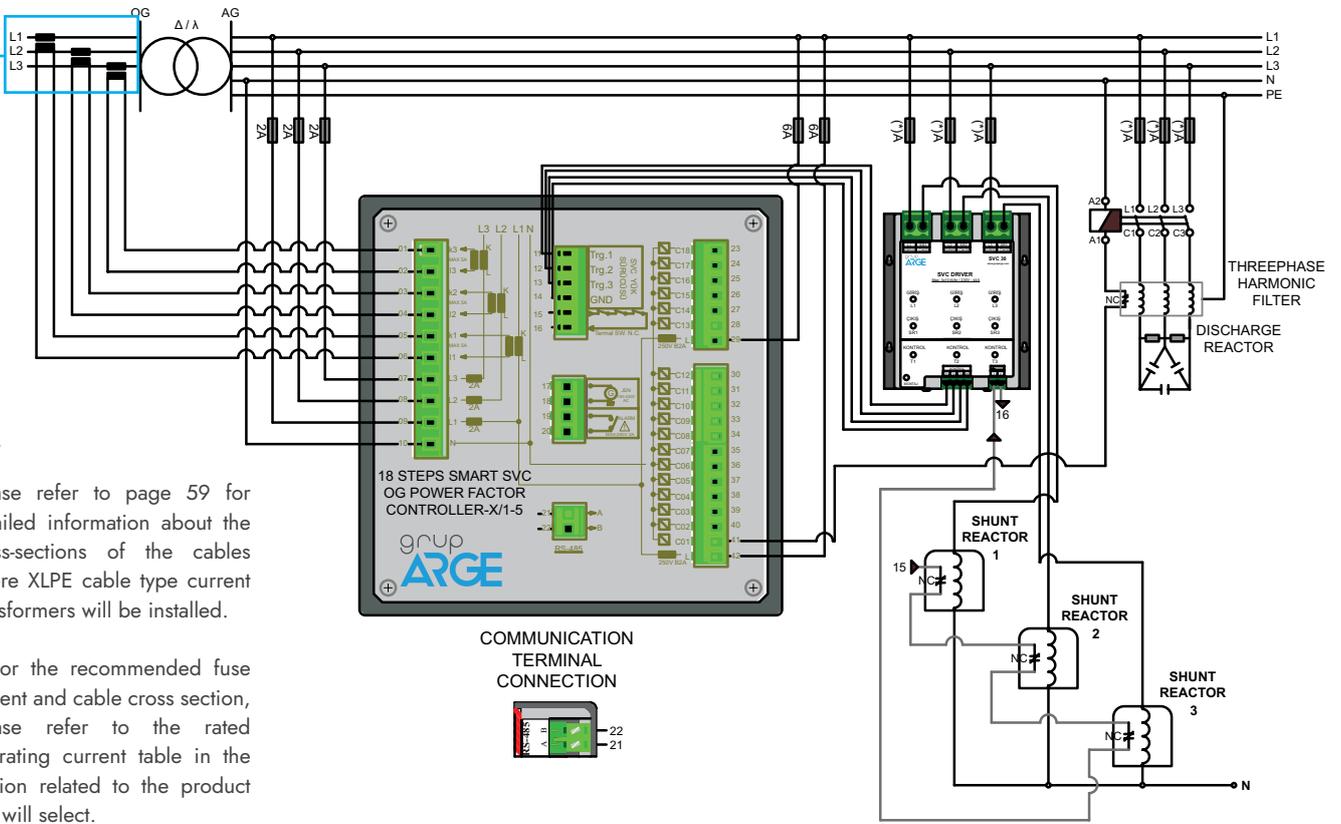

Please refer to page 59 for detailed information about the cross-sections of the cables where XLPE cable type current transformers will be installed.

(*For the recommended fuse current and cable cross section, please refer to the rated operating current table in the section related to the product you will select.

Smart GES1 - GES5 Power Factor Controllers

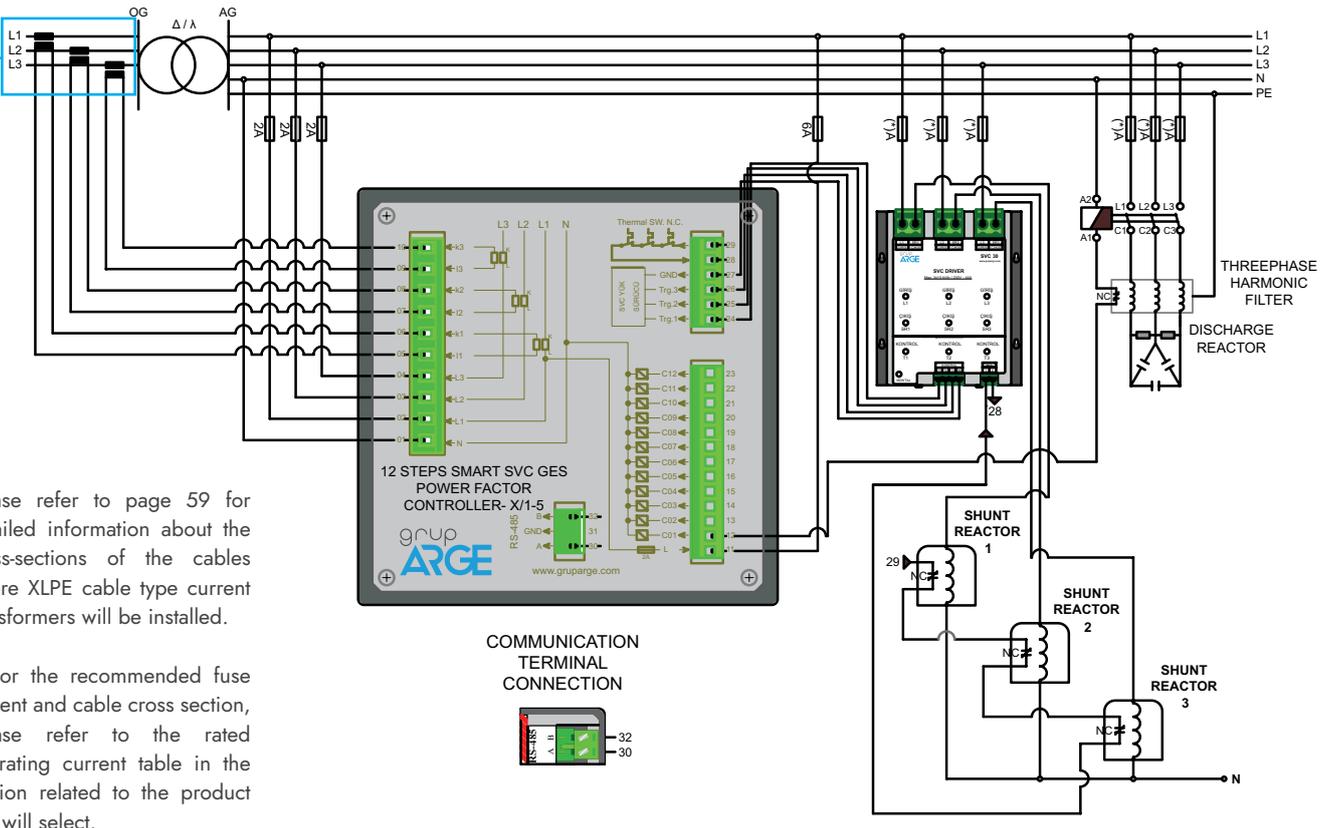

Please refer to page 59 for detailed information about the cross-sections of the cables where XLPE cable type current transformers will be installed.

(*For the recommended fuse current and cable cross section, please refer to the rated operating current table in the section related to the product you will select.



SWITCHING

Switching

Thanks to the thyristor SVC drives and static contactors developed by Grup Arge, it becomes possible to produce solutions in enterprises where there are fast loads and cannot be impossible to respond contactor systems.

It is not possible to respond to fast variable loads by switching with mechanical contactors in classical systems. Such enterprises can only be answered by switching with a thyristor. In thyristor systems, since the capacitors are activated at zero transitions, the necessity to wait for discharge times is eliminated. In addition, since the current drawn when the capacitors are first switched on is minimum, it is possible to switch them on and off at a high speed. Thus, the life and power quality of capacitors and switching devices are positively affected. In addition, panel maintenance costs are also minimized.

The system can operate in both binary and normal mode depending on the power of the capacitors connected to the steps. If the capacitor arrangement is made in such a way that each step is twice the previous step, the power factor controllers operates in binary mode. The capacitor selection process is much faster in binary mode. If no sequence has been made in this way, or if binary mode has been switched out due to capacitors being devalued over time, the device continues to operate in normal mode. For such very fast systems, it is possible to detect the load change in 10 ms and switch within the next 10 ms. The capacitor is activated at the first zero transition after the switching signal. In this way, the response speed of the system can be reduced to 20 ms.

SVC drivers are switching devices that enable precise compensation even at low powers by activating the single-phase shunt reactors connected to each phase as much as the system needs. In the Smart SVC system, shunt reactors can be adjusted by triggering their power at certain angles through thyristors, each at 1000 steps, for a total of 3000 steps. Smart SVC Drives are designed to drive 3 monophas shunt reactors. In this way, the power of these reactors, each connected to a separate phase, is controlled independently and in a way to provide the desired power.

Key Features

- **Rated Voltage:** 400 V
- **Rated Frequency:** 50 Hz
- **Trigger Voltage:** 12 V DC
- **Maximum Operating Current of the Device (IRms):**
 - For SVC 5; 7.2 A. • For SVC 10; 14.4 A.
 - For SVC 20; 28.8 A. • For SVC 30; 43.3 A
- **Ambient Temperature:** -10 C / +45 C
- **Protection Class:** IP00
- **Response Time:** 20 ms
- **Humidity:** 95%



SVC 5



SVC 20



SVC 30

Technical Features

| Product Code | Product Name | Product Description | Connectable Shunt Reactors | Voltage (V) | Nominal Cable Cross Section (mm ²) | Nominal Fuse Current (A) |
|--------------|--------------|---------------------|----------------------------|-------------|--|--------------------------|
| GA2101 | SVC 5 | 5 kVAr SVC DRIVER | 3x(SRM 1.0/SRM 1.5) | 230 | 3(1x2.5) mm ² | 16 |
| GA2102 | SVC 10 | 10 kVAr SVC DRIVER | 3xSRM 3.0 | 230 | 3(1x4) mm ² | 25 |
| GA2103 | SVC 20 | 20 kVAr SVC DRIVER | 3x(SRM 5.0/SRM 7.5) | 230 | 3(1x10) mm ² | 50 |
| GA2104 | SVC 30 | 30 kVAr SVC DRIVER | 3xSRM 10.0 | 230 | 3(1x16) mm ² | 80 |

- For larger powers, solutions can be produced by connecting up to 3 drives in parallel.
- NC (Normally closed) thermal control is available for 20 and 30 kVAr models.
- Inductive Static Contactors must be used for quick commissioning of three-phase shunt reactors.

Technical Drawing


5 kVAr SVC DRIVER

The technical drawing provides three views of the 5 kVAr SVC driver:


- Front View:** Shows a rectangular device with a total width of 106 mm and a total height of 42.92 mm. The top terminal block is 48 mm wide and 13.5 mm high. The bottom terminal block is 32.5 mm wide and 13 mm high.
- Side View:** Shows the device's profile with a total width of 101 mm.
- Top View:** Shows the top surface with a total width of 83 mm and a total height of 67.6 mm.

Technical Drawing


10 kVAr SVC DRIVER

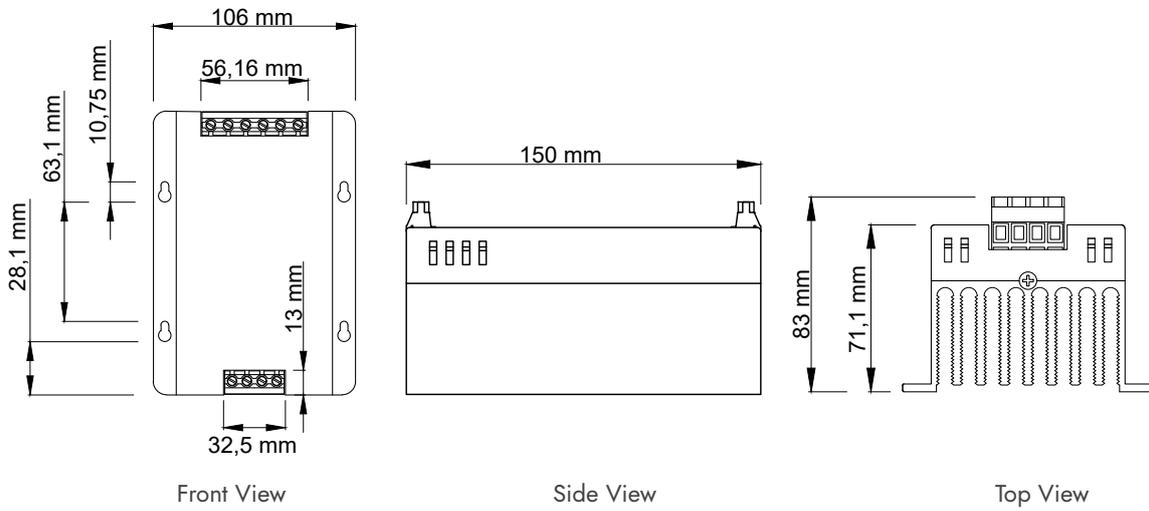

20 kVAr SVC DRIVER

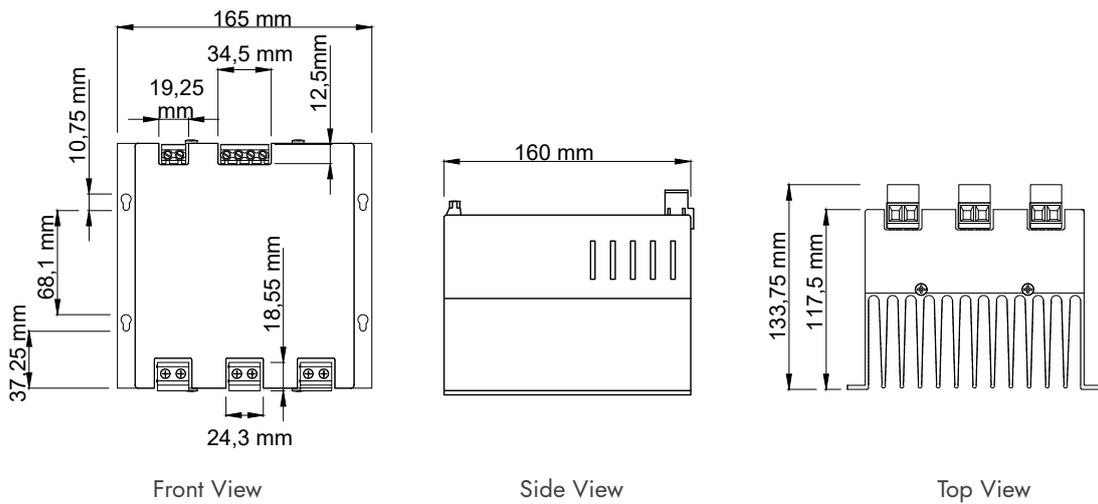


30 kVAr SVC DRIVER

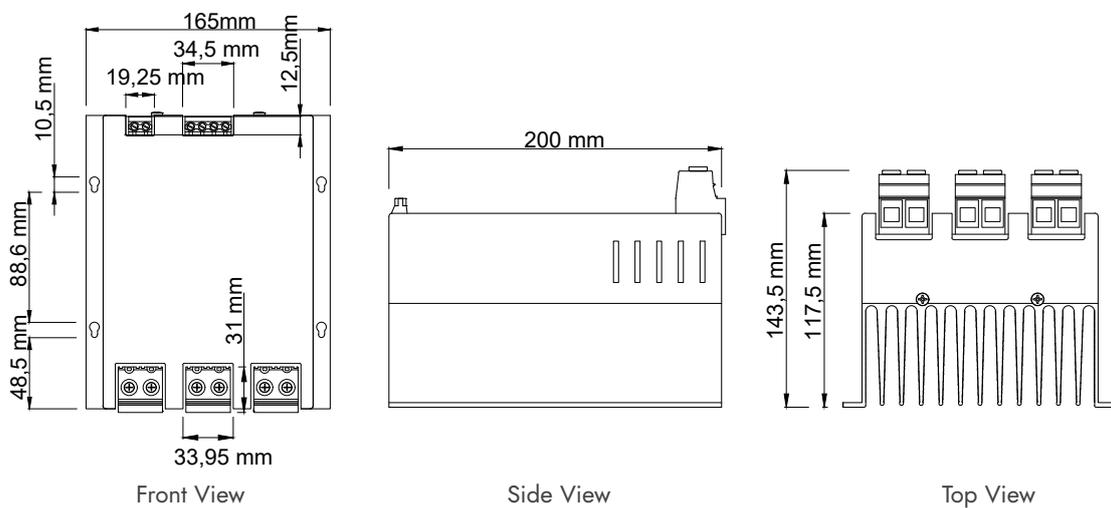


Connection Diagram

SVC (5 - 10 kVAr) Driver

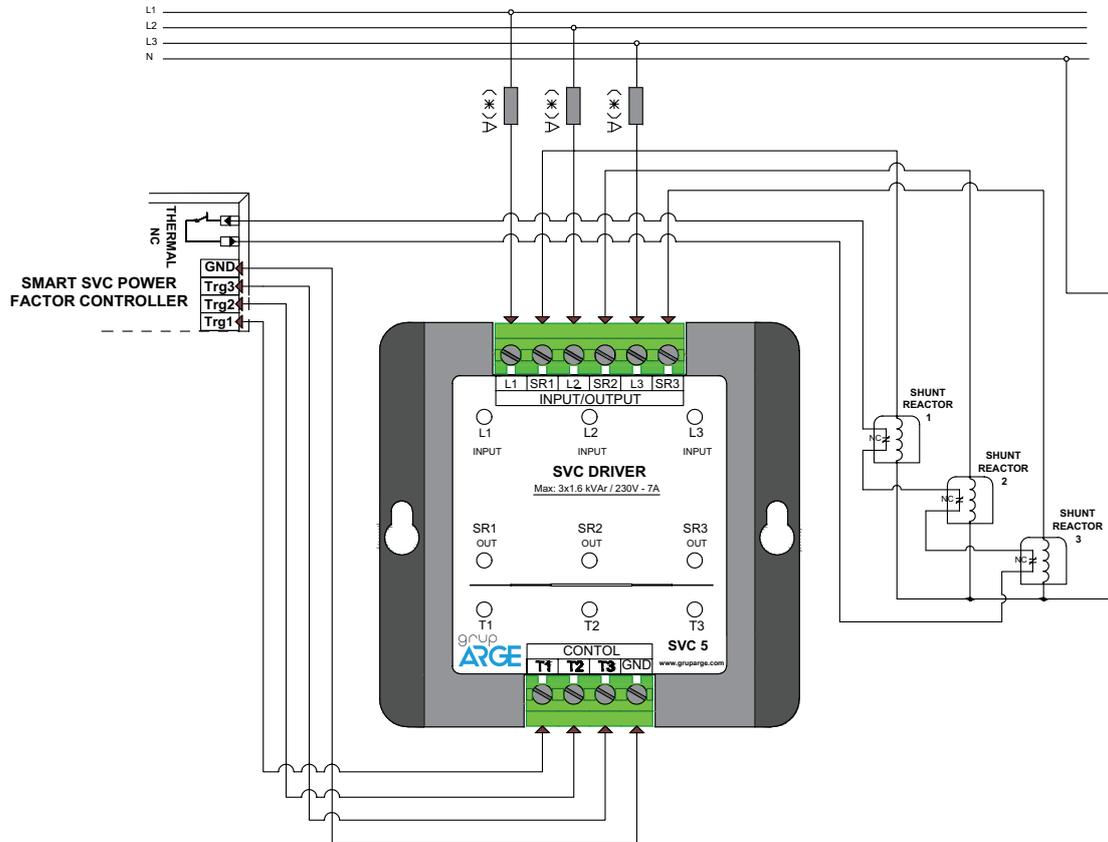

SVC (20 - 30 kVAr) Driver

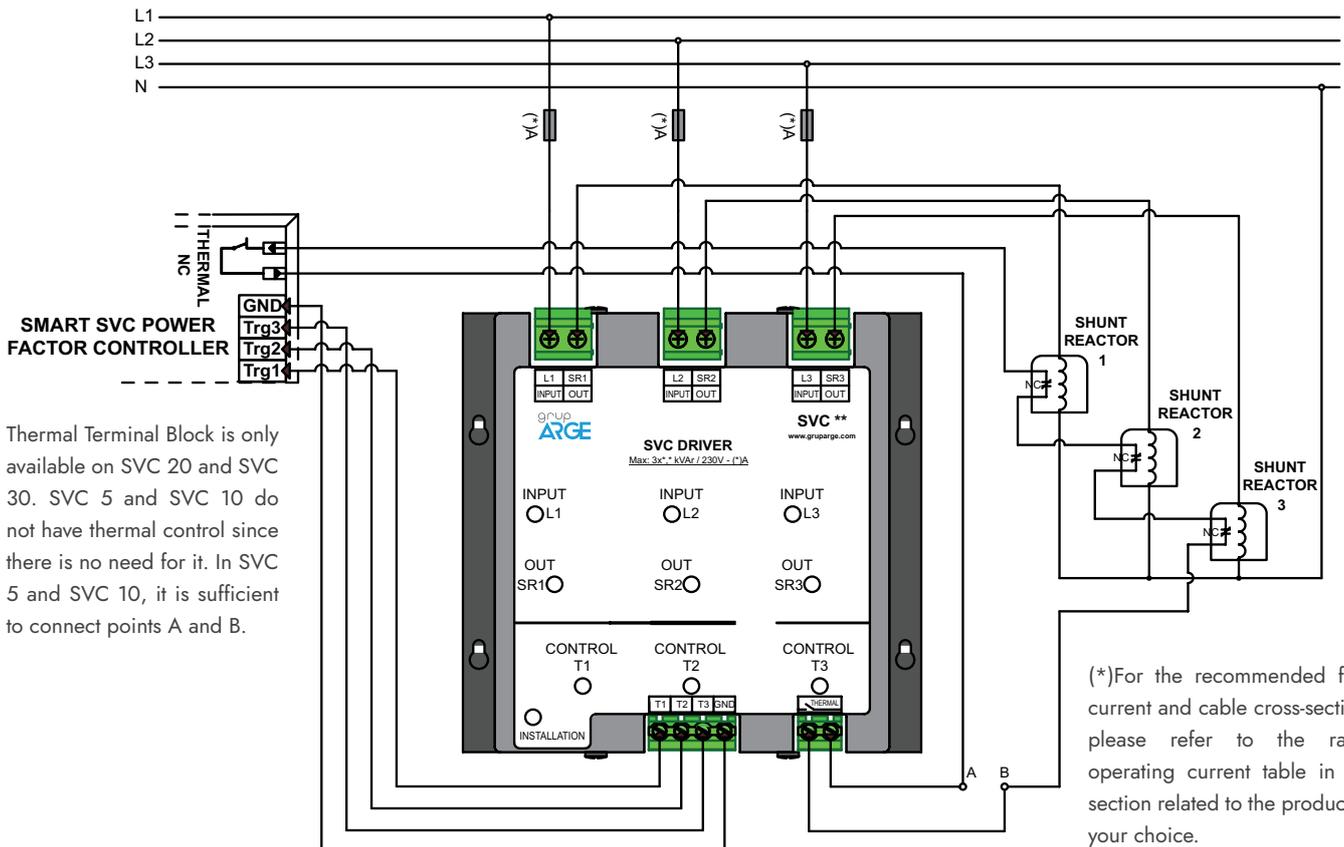

Thermal Terminal Block is only available on SVC 20 and SVC 30. SVC 5 and SVC 10 do not have thermal control since there is no need for it. In SVC 5 and SVC 10, it is sufficient to connect points A and B.

(*)For the recommended fuse current and cable cross-section, please refer to the rated operating current table in the section related to the product of your choice.

It is used for switching capacitors in compensation systems. Static contactors prevent high switching currents by switching when capacitor voltage and bus voltage are equalized. Furthermore, it provides to meet the reactive needs of fast loads by switching very fast without waiting for the capacitor discharge time.

In enterprises where reactive changes are fast, contactor systems are insufficient to respond to the need for compensation. In the compensation of such enterprises, it is possible to respond to rapidly changing loads by switching with thyristors instead of switching with mechanical contactors in classical systems.

In thyristor systems, since the capacitors are activated at zero crossings, the necessity to wait for discharge times is eliminated. In addition, since the current drawn when the capacitors are first switched on is minimal, it is possible to switch on and off at a high speed.

Key Features

- **Nominal Voltage:** 400 V
- **Nominal Frequency:** 50 Hz
- **Maximum Operating Voltage:** 690 V
- **Control Voltage:** 9 - 30 V DC
- **Ambient Temperature:** -10 C° / +55 C°
- **Protection Class:** IP00
- **Response Time:** 20 ms
- **Humidity:** 95%



KSK 10T3



KSK 20T3



KSK 50T2



KSK 80T2

Technical Features

| Product Code | Product Name | Product Description | Voltage (V) | Nominal Cable Cross Section (mm ²) | Nominal Fuse Current (A) |
|--------------|--------------|---|-------------|--|--------------------------|
| GA2201 | KSK 10T3* | 10 kVA _r CAP. STATIC CON. 3 TRIS. | 230/400 | 3(1x4) mm ² | 25 |
| GA2202 | KSK 15T2 | 15 kVA _r CAP. STATIC CON. | 400 | 3(1x6) mm ² | 40 |
| GA2203 | KSK 15T2D | 15 kVA _r CAP. STATIC CON. DISCHARGE RESISTANT | 400 | 3(1x6) mm ² | 40 |
| GA2204 | KSK 20T3* | 20 kVA _r CAP. STATIC CON. 3 TRIS. | 230/400 | 3(1x10) mm ² | 50 |
| GA2205 | KSK 25T2 | 25 kVA _r CAP. STATIC CON. | 400 | 3(1x10) mm ² | 63 |
| GA2206 | KSK 25T2D | 25 kVA _r CAP. STATIC CON. DISCHARGE RESISTANT | 400 | 3(1x10) mm ² | 63 |
| GA2207 | KSK 50T2 | 50 kVA _r CAP. STATIC CON. | 400 | 3(1x35) mm ² | 125 |
| GA2208 | KSK 50T2D | 50 kVA _r CAP. STATIC CON. DISCHARGE RESISTANT | 400 | 3(1x35) mm ² | 125 |
| GA2210 | KSK 80T2D | 80 kVA _r CAP. STATIC CON. DISCHARGE RESISTANT | 400 | 3(1x50) mm ² | 200 |
| GA2212 | KSK 100T2D | 100 kVA _r CAP. STATIC CON. DISCHARGE RESISTANT | 400 | 3(1x70) mm ² | 250 |

* For three-phase capacitors, a static contactor with 2 thyristors, a static contactor with 3 thyristors must be preferred for single-phase capacitors.

- 50, 80 and 100 kVA_r capacitive static contactors are fan cooled.
- All static contactors have NC (Normally closed) thermal control.
- Capacitive static contactors must be used in conjunction with a harmonic filter or current limiting reactor.
- In panels where capacitive static contactors are used, LV surge arrester must be used.

In what situations and why should the discharge resistor be used?


It is recommended to use it in all applications with harmonic filters. In order for the capacitor to be put back into operation in a short time after disconnection, the discharge resistor must be used. The discharge resistance can also be applied externally.

What is the advantage of products with an internal discharge resistor?


In externally applied discharge resistor solutions, the discharge resistors are constantly under voltage while the capacitors are in operation. In this case, the resistors increase active losses and board temperature. Discharge resistors integrated in the IGBT and the drivers can discharge the capacitor in less than 150 ms after the capacitor is removed from the circuit. Discharge the capacitor and leave the circuit. When the capacitor is in the circuit, the resistors are not connected to the line.

Technical Drawing


Capacitive Static Contactors KSK 10

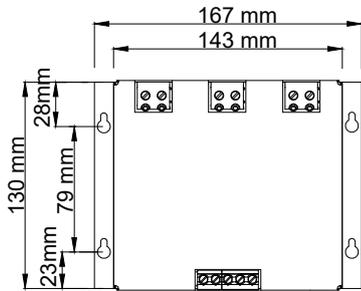

Front View

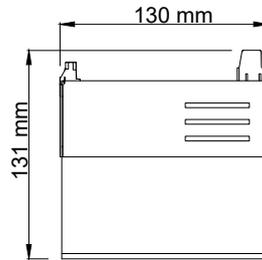


Side View

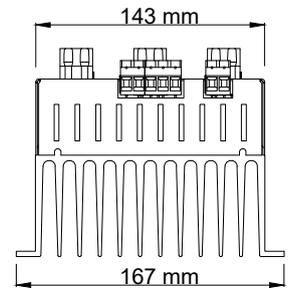


Top View


Capacitive Static Contactors KSK 20

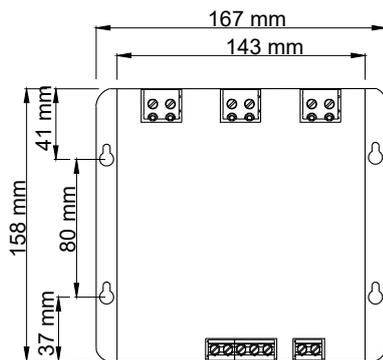

Front View

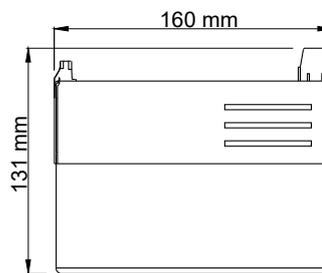


Side View

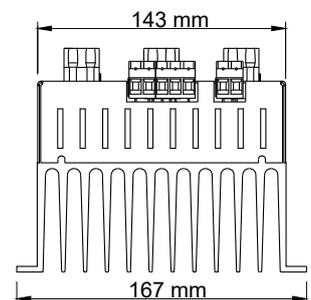


Top View


Capacitive Static Contactors KSK 15 - 25

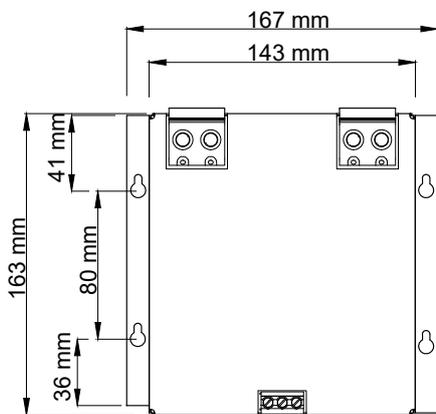

Front View

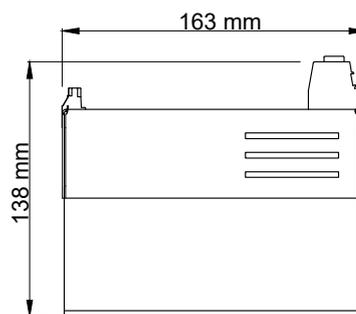


Side View

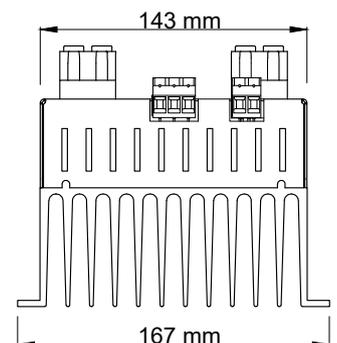


Top View

Technical Drawing


Capacitive Static Contactors KSK 50

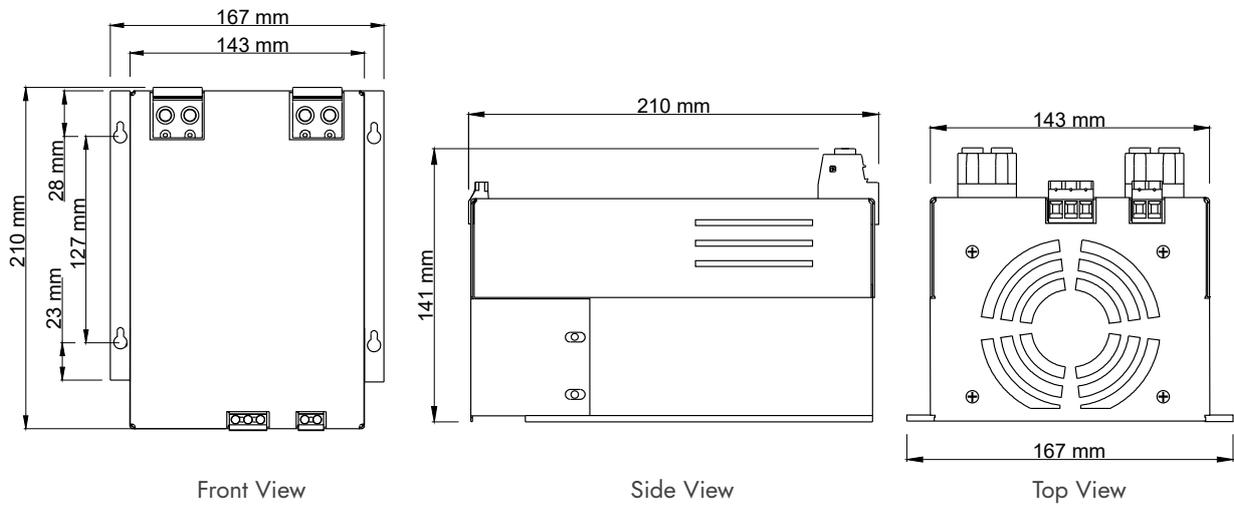

Capacitive Static Contactors KSK 80

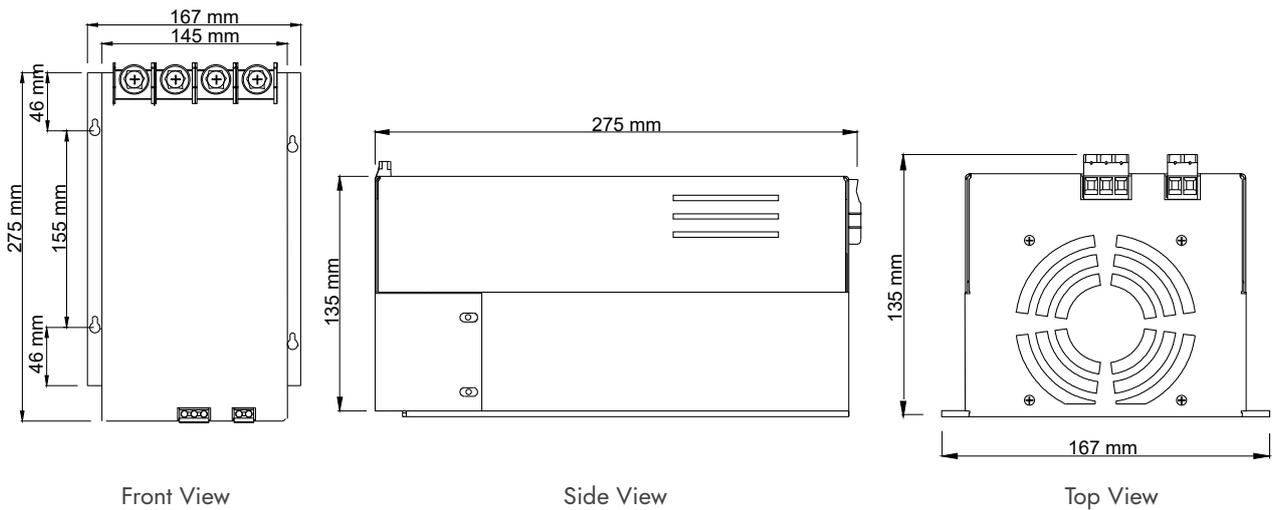


Capacitive Static Contactors KSK 100

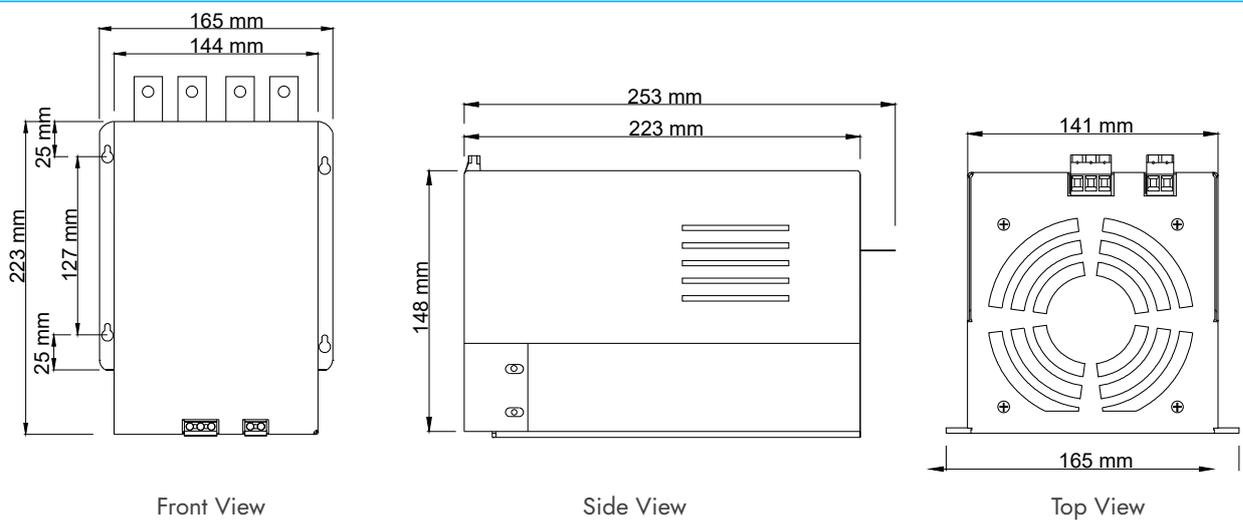

Connection Diagram


Capacitive Static Contactor T2 Connection

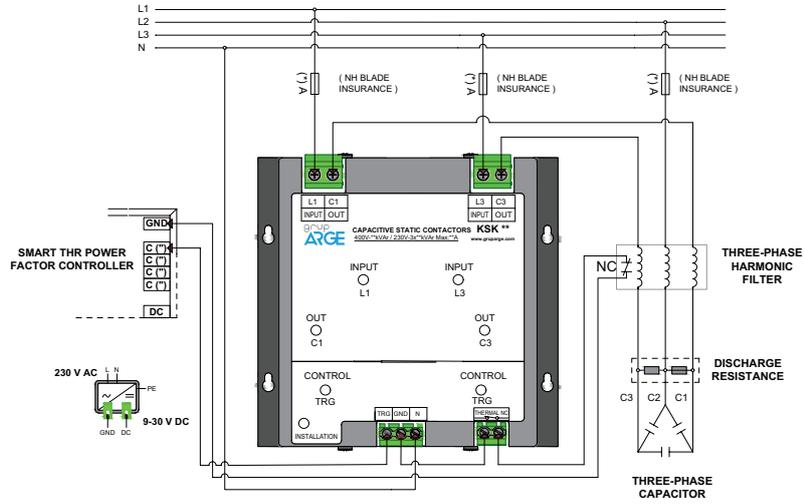


NOTE:

For static contactors with internal discharge resistor, there is no need to use an external discharge resistor.

Capacitive Static Contactor T3 Connection

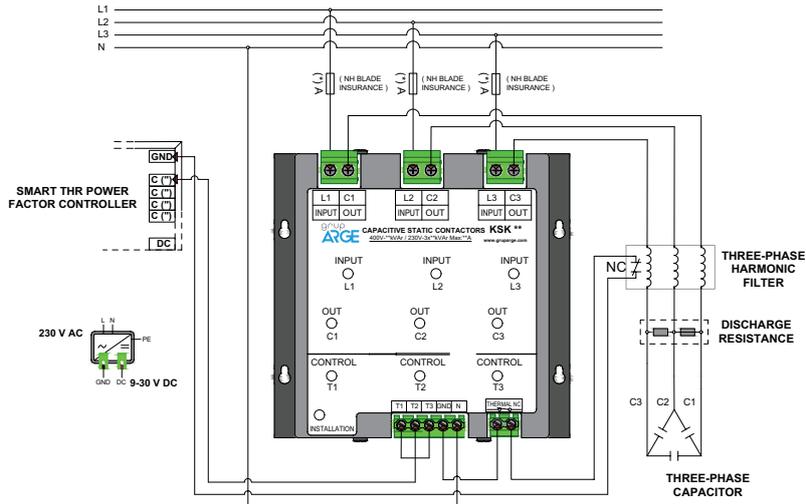

Capacitive Static Contactor Monophase T3 Connection

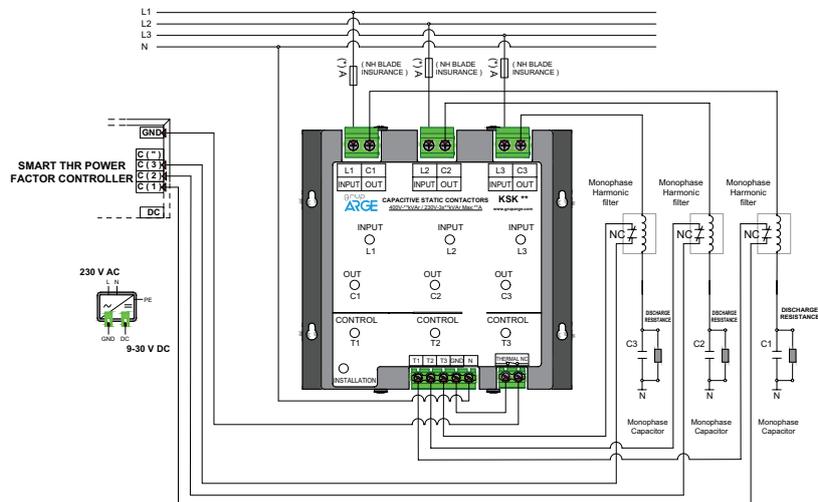

Inductive Static Contactors are designed to be used for switching three-phase shunt reactors connected to steps. They have advantages over contactors such as silent operation, long life and low failure rates.



ESK 20T3




ESK 50T3

Technical Features


| Product Code | Product Name | Product Description | Voltage (V) | Nominal Cable Cross Section (mm ²) | Nominal Fuse Current (A) |
|--------------|--------------|--------------------------------------|-------------|--|--------------------------|
| GA2221 | ESK 10T3 | 10 kVA _r END. STATIC CON. | 230/400 | 3(1x4) mm ² | 25 |
| GA2222 | ESK 20T3 | 20 kVA _r END. STATIC CON. | 230/400 | 3(1x10) mm ² | 50 |
| GA2223 | ESK 30T3 | 30 kVA _r END. STATIC CON. | 230/400 | 3(1x16) mm ² | 80 |
| GA2224 | ESK 50T3 | 50 kVA _r END. STATIC CON. | 230/400 | 3(1x35) mm ² | 125 |

Technical Drawing


Inductive Static Contactors ESK 10

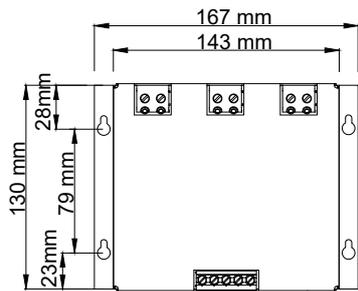

Front View

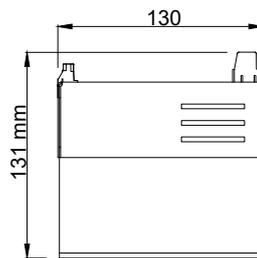


Side View

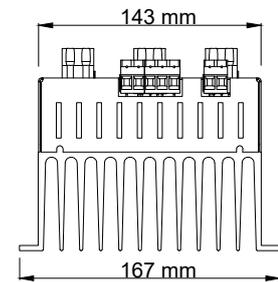


Top View


Inductive Static Contactors ESK 20

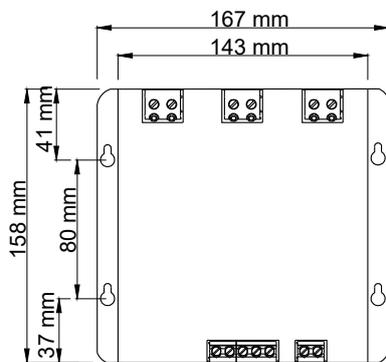

Front View

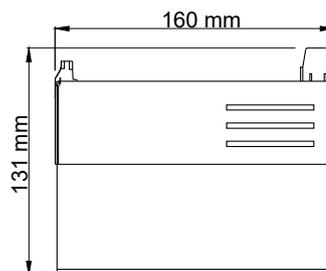


Side View

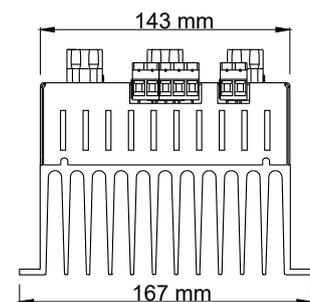


Top View

Technical Drawing

Inductive Static Contactors ESK 30

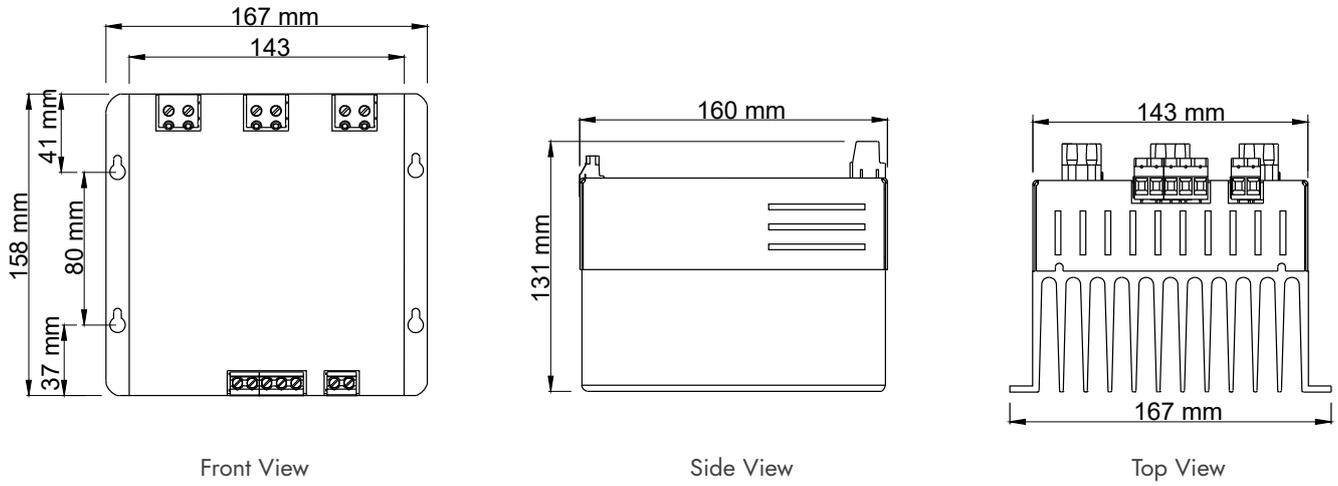


Inductive Static Contactors ESK 50

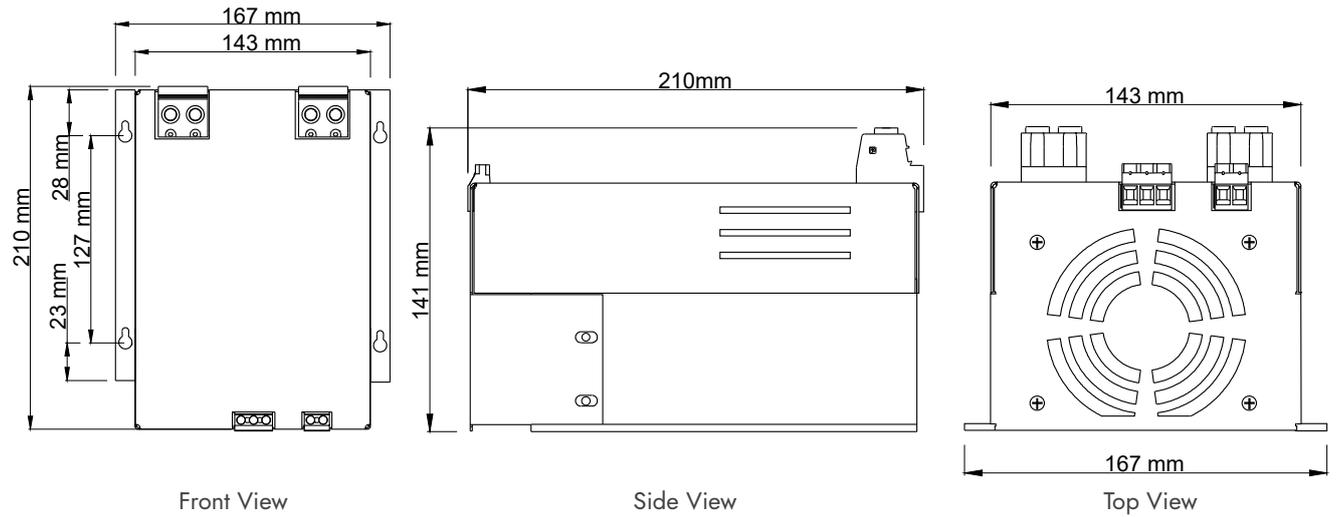


Connection Diagram

Inductive Static Contactors ESK (10) - Monophase Shunt Reactor

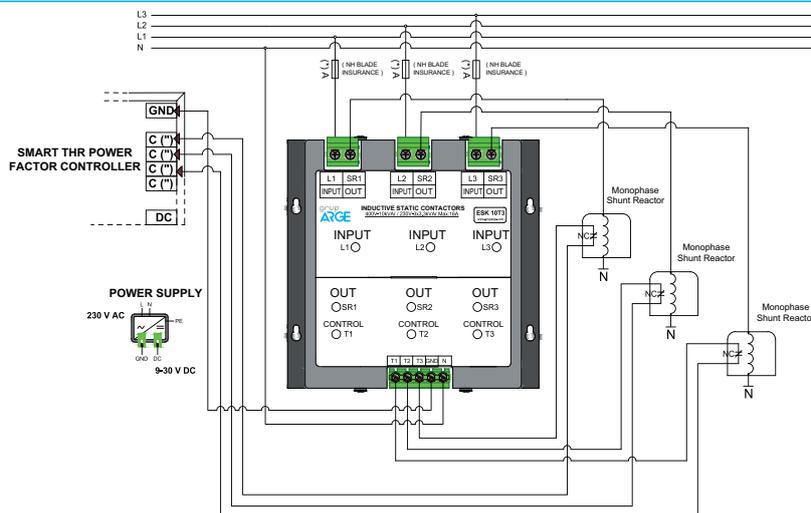


Connection Diagram


ESK (10) - Three-Phase Shunt Reactor

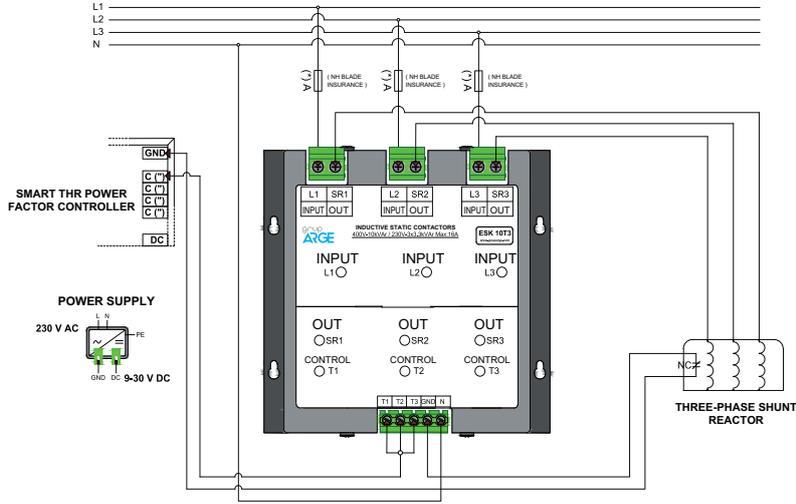

ESK (20-30-50) - Monophase Shunt Reactor

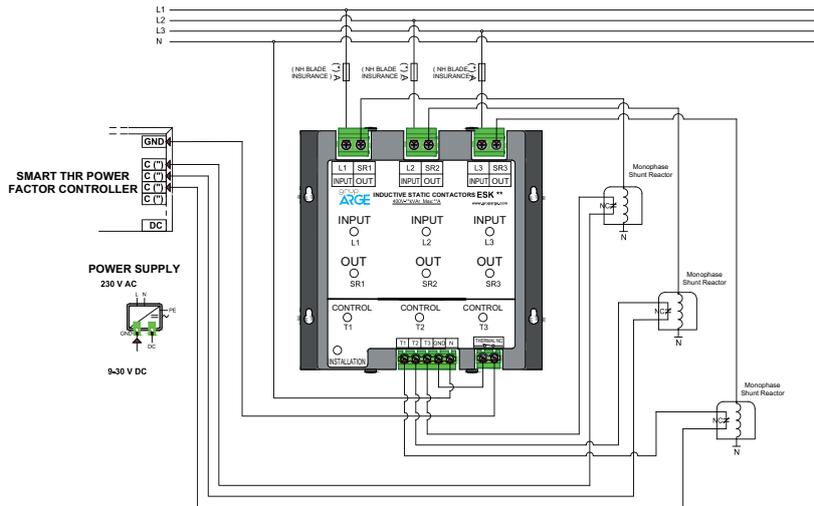

ESK (20-30-50) - Three-Phase Shunt Reactor

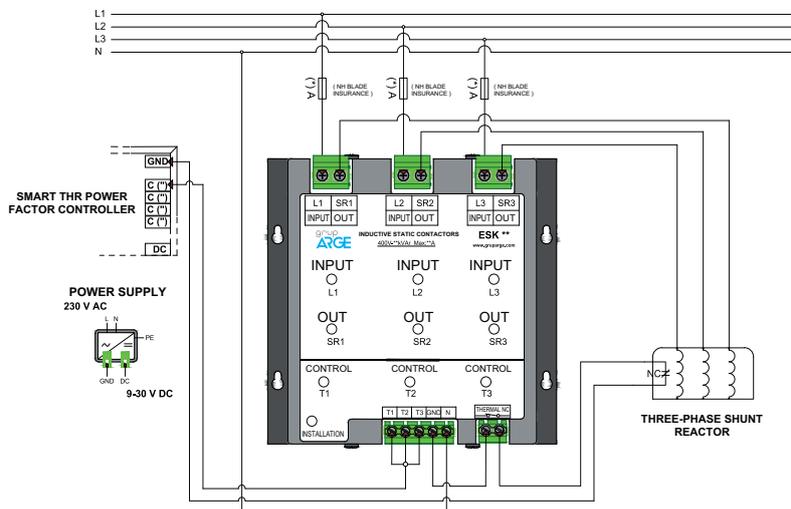

They are electromagnetic switches that turn on the closed contacts and turn off the open contacts when electricity is supplied to the coil and can be controlled remotely. As it is known, capacitors cause very short-term high currents that can reach up to 150 times the rated current between 1 and 15

kHz at the moment of initial activation. In order to limit these currents, a pre-resistor can be added to all three phases to which the capacitor is connected. Under normal conditions, this process is difficult, therefore only a compensation contactor designed for this purpose is used.




KNT K50.0

Technical Features

| Product Code | Product Name | Product Description | Power kVA _r | | U _i (V) | I _{th} (A) | Current (A) (Ac-6b) (for 400 V) | Auxiliary Contact | | Weight |
|--------------|--------------|--|------------------------|---------|--------------------|---------------------|---------------------------------------|-------------------|----|--------|
| | | | 230 (V) | 400 (V) | | | | NO | NC | |
| GA2301 | KNT K2.5 | 2.5 kVA _r COMPENSATION CONTACTOR | 1,4 | 2,5 | 690 | 25,0 | 3,6 | 1 | 1 | 0,44 |
| GA2302 | KNT K5.0 | 5.0 kVA _r COMPENSATION CONTACTOR | 2,8 | 5,0 | 690 | 25,0 | 7,2 | 1 | 1 | 0,44 |
| GA2303 | KNT K7.5 | 7.5 kVA _r COMPENSATION CONTACTOR | 4,0 | 7,5 | 690 | 25,0 | 11,0 | 1 | 1 | 0,44 |
| GA2304 | KNT K10.0 | 10 kVA _r COMPENSATION CONTACTOR | 5,0 | 10,0 | 690 | 25,0 | 14,0 | 1 | 1 | 0,44 |
| GA2305 | KNT K12.5 | 12.5 kVA _r COMPENSATION CONTACTOR | 6,7 | 12,5 | 690 | 32,0 | 18,0 | 1 | 1 | 0,63 |
| GA2306 | KNT K15.0 | 15.0 kVA _r COMPENSATION CONTACTOR | 8,5 | 15,0 | 690 | 32,0 | 22,0 | 1 | 1 | 0,63 |
| GA2307 | KNT K20.0 | 20.0 kVA _r COMPENSATION CONTACTOR | 11,0 | 20,0 | 690 | 43,0 | 29,0 | 1 | 1 | 0,64 |
| GA2308 | KNT K25.0 | 25.0 kVA _r COMPENSATION CONTACTOR | 14,0 | 25,0 | 690 | 63,0 | 36,0 | 1 | 2 | 1,4 |
| GA2309 | KNT K30.0 | 30.0 kVA _r COMPENSATION CONTACTOR | 20,0 | 30,0 | 690 | 63,0 | 44,0 | 1 | 2 | 1,4 |
| GA2310 | KNT K40.0 | 40.0 kVA _r COMPENSATION CONTACTOR | 25,0 | 40,0 | 690 | 95,0 | 58,0 | 1 | 2 | 1,5 |
| GA2311 | KNT K50.0 | 50.0 kVA _r COMPENSATION CONTACTOR | 29,0 | 50,0 | 690 | 95,0 | 72,0 | 1 | 2 | 1,5 |
| GA2312 | KNT K60.0 | 60.0 kVA _r COMPENSATION CONTACTOR | 32,0 | 60,0 | 690 | 200,0 | 87,0 | 1 | 0 | 3,45 |
| GA2313 | KNT K70.0 | 70.0 kVA _r COMPENSATION CONTACTOR | 35,0 | 70,0 | 690 | 275,0 | 101,0 | 1 | 0 | 3,45 |
| GA2314 | KNT K75.0 | 75.0 kVA _r COMPENSATION CONTACTOR | 38,0 | 75,0 | 690 | 275,0 | 108,0 | 1 | 0 | 3,45 |

Technical Drawing


KNT K2.5, KNT K5.0, KNT K7.5, KNT K10.0, KNT K12.5, KNT K15.0, KNT K20.0

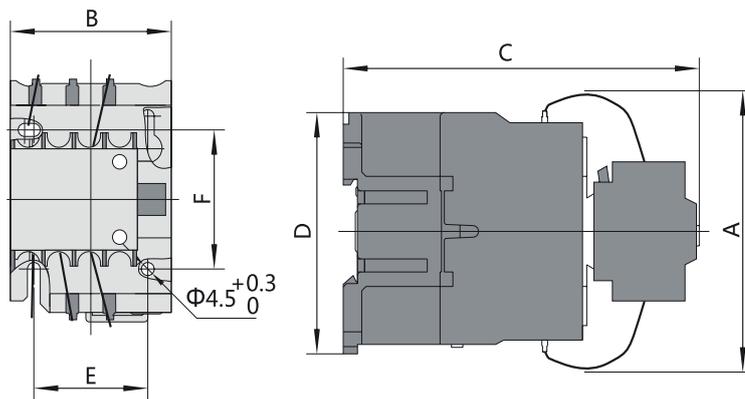

| Contactor Type | A _{max} | B _{max} | C _{max} | D _{max} | E _{max} | F _{max} |
|--|------------------|------------------|------------------|------------------|------------------|------------------|
| KNT K2.5, KNT K5.0, KNT K7.5, KNT K10.0 | 80 | 47 | 124 | 76 | 34/35 | 50/60 |
| KNT K12.5, KNT K15.0 | 90 | 58 | 132 | 86 | 40 | 48 |
| KNT K20.0 | 90 | 58 | 136 | 86 | 40 | 48 |


Technical Drawing

KNT K25.0, KNT K30.0, KNT K40.0, KNT K50.0

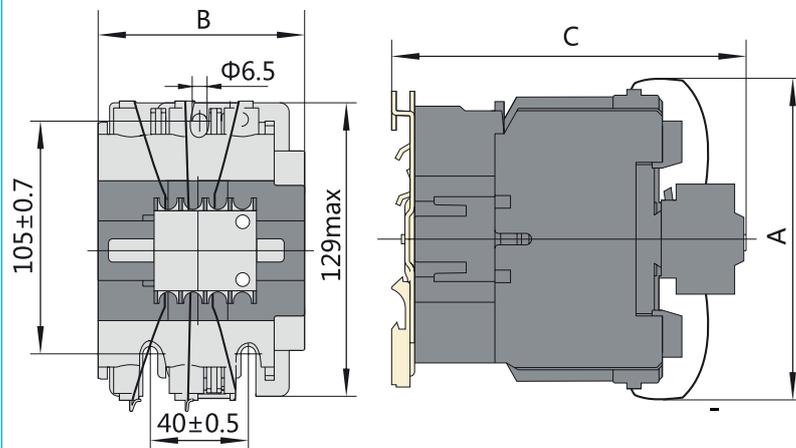

| Contactor Type | Amax | Bmax | Cmax | Dmax | Emax | Fmax |
|----------------------|------|------|------|------|------|------|
| KNT K25.0, KNT K30.0 | 132 | 79 | 150 | - | - | - |
| KNT K40.0, KNT K50.0 | 135 | 87 | 158 | - | - | - |


KNT K60.0, KNT K70.0, KNT K75.0

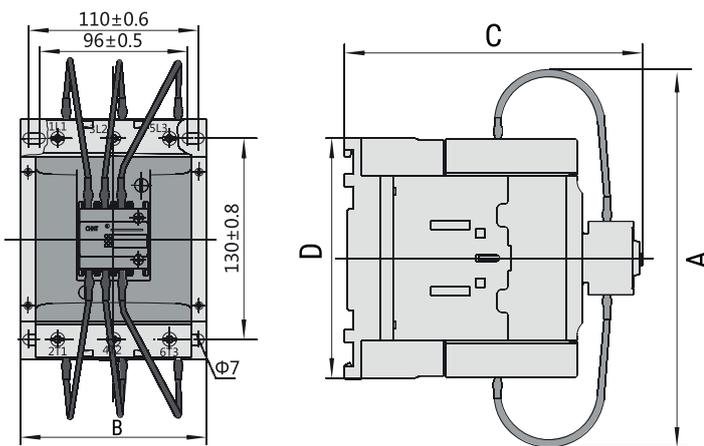

| Contactor Type | Amax | Bmax | Cmax | Dmax | Emax | Fmax |
|---------------------------------|------|------|------|------|------|------|
| KNT K60.0, KNT K70.0, KNT K75.0 | 200 | 120 | 192 | 155 | - | - |

Connection Diagram

Compensation Contactor

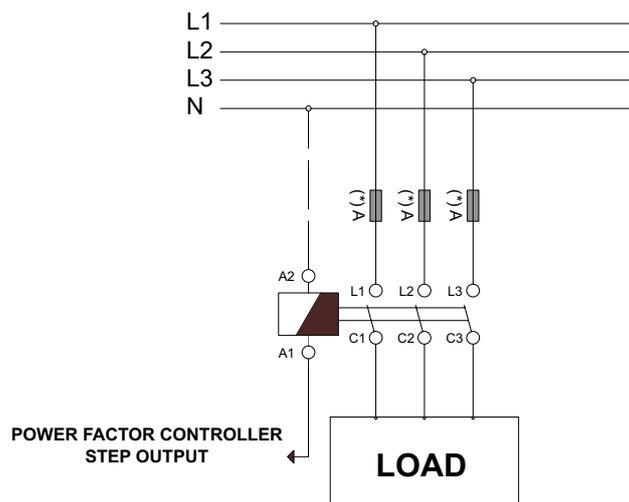

(*)For the recommended fuse current and cable cross-section, please refer to the rated operating current table in the section related to the product of your choice.



SHUNT AND HARMONIC

Shunt Reactors

MV cables, UPSs and lighting elements with electronic ballasts are characterized as capacitive. Shunt reactors are needed to meet the reactive power requirement and to keep the reactive ratios within the desired limits in enterprises with such loads. The load profile of the enterprises shows changes day by day. In the past, it was sufficient to compensate only by connecting capacitors. But today, the number of devices with capacitive characteristics is constantly increasing. Therefore, it is necessary to use shunt reactors together with capacitors for a correct compensation. According to the size and load profile of the enterprises, the size of the shunt reactor to be used varies. After analyzing the enterprise correctly, the most suitable shunt reactor should be selected considering the cost.

Key Features

- **Standard:** EN 60076-6 and EN 61558-2-20
- **Nominal Voltage:** 230 - 400 V AC
- **Nominal Power:** 0.5 - 50 kVAr
- **Nominal Frequency:** 50 Hz
- **Reactor Factor:** 100%
- **Inductivity Tolerance:** 5%
- **Insulation (Winding - Core):** 3 kV
- **Insulation Class:** Class F 155 C°
- **Humidity:** 95%
- **Cooling:** Natural T40
- **Connection:** Terminal block, lug or busbar.
- **Core:** Low loss, siliceous sheet, air gap.
- **Winding Material:** Aluminum or copper.
- **Thermal Protection:** 120 C (NC contact).
- **Protection Class:** IP40

Harmonic Filters

Under normal conditions, it is required that the mains voltage is in sinusoidal form. However, for various reasons, the mains voltage moves away from the sinusoidal form and high-frequency components called harmonics are formed. When harmonics exceed certain limits, it can cause very dangerous consequences for businesses. For this reason, harmonic filter reactors should be used in compensation panels in enterprises with high harmonics. In this way, both resonance events that are dangerous for the system are prevented and capacitors are protected from the harmful effects of harmonics.

Key Features

- **Standard:** EN60076-6 ve EN61558-2-20
- **Nominal Voltage:** 230 - 690 V AC
- **Nominal Power:** 0.5 - 100 kVAr
- **Nominal Frequency:** 50 Hz
- **Inductivity Tolerance:** %5
- **Insulation Class:** Class F 155 C°
- **Humidity in the working environment:** < %95
- **Cooling:** Natural T40
- **Connection:** Terminal, lug or busbar.
- **Core:** Consists of high permeability iron core with air gap.
- **Winding material:** Aluminum or copper.
- **Thermal protection:** 120°C (NC contact). Thermally protected against overheating in the center leg.
- **Protection class:** IP00

Technical Features

| SVC Shunt Reactor (230 V) | | | | | | | | | |
|---------------------------|--------------|----------------------------|--------------|-----------------------|--------|------------|--------------------|--|-------------|
| Product Code | Product Name | Product Description | Power (kVAr) | A (I _{rms}) | L (mH) | Connection | Thermal Protection | Nominal Cable Cross Section (mm ²) | Weight (kg) |
| GA5001 | SVC-R 1.0 | 1.0 kVAr SVC SHUNT REACTOR | 1,0 | 4,34 | 168,38 | Terminal | ✓ | (1x2.5) mm ² | 5 |
| GA5002 | SVC-R 1.5 | 1.5 kVAr SVC SHUNT REACTOR | 1,5 | 6,52 | 112,25 | Terminal | ✓ | (1x2.5) mm ² | 8 |
| GA5003 | SVC-R 3.0 | 3.0 kVAr SVC SHUNT REACTOR | 3,0 | 13,04 | 56,12 | Terminal | ✓ | (1x4) mm ² | 14,5 |



SVC-R 1.5

• SVC shunt reactors are recommended to be used only with SVC Drives.

| Monophase Shunt Reactor (230 V) | | | | | | | | | |
|---------------------------------|--------------|-----------------------------------|--------------|-----------------------|--------|------------|--------------------|--|-------------|
| Product Code | Product Name | Product Description | Power (kVAr) | A (I _{rms}) | L (mH) | Connection | Thermal Protection | Nominal Cable Cross Section (mm ²) | Weight (kg) |
| GA5101 | SRM 1.0 | 1.0 kVAr MONOPHASE SHUNT REACTOR | 1,0 | 4,34 | 168,38 | Terminal | ✓ | (1x2.5) mm ² | 6,5 |
| GA5102 | SRM 1.5 | 1.5 kVAr MONOPHASE SHUNT REACTOR | 1,5 | 6,52 | 112,25 | Terminal | ✓ | (1x2.5) mm ² | 9,5 |
| GA5103 | SRM 3.0 | 3.0 kVAr MONOPHASE SHUNT REACTOR | 3,0 | 13,04 | 56,12 | Terminal | ✓ | (1x4) mm ² | 17,5 |
| GA5104 | SRM 5.0 | 5.0 kVAr MONOPHASE SHUNT REACTOR | 5,0 | 21,7 | 33,7 | Lug | ✓ | (1x4) mm ² | 20,0 |
| GA5105 | SRM 7.5 | 7.5 kVAr MONOPHASE SHUNT REACTOR | 7,5 | 32,6 | 22,45 | Lug | ✓ | (1x10) mm ² | 27,0 |
| GA5106 | SRM 10.0 | 10.0 kVAr MONOPHASE SHUNT REACTOR | 10,0 | 43,4 | 16,83 | Busbar | ✓ | (1x16) mm ² | 34,0 |



SRM 10.0


• Monophase Shunt Reactors can be used with SVC Drives, Inductive Static Contactors and Compensation Contactors.

Technical Drawing


| SVC - Monophase Shunt Reactor | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--------|---|--------|---|--------|--------------|--------|--------|--------|--------|--------|-----------|-----|-----|-----|----|----|-----------|-----|-----|-----|-----|----|-----------|-----|-----|-----|-----|-----|---------|-----|-----|-----|-----|-----|---------|-----|-----|-----|-----|-----|----------|-----|-----|-----|-----|-----|
| <p>TYPE 1</p> | | <p>TYPE 2</p> | | <p>SVC Shunt Reactors (230 V)</p> <table border="1"> <thead> <tr> <th>Product Name</th> <th>A (mm)</th> <th>B (mm)</th> <th>C (mm)</th> <th>D (mm)</th> <th>E (mm)</th> </tr> </thead> <tbody> <tr> <td>SVC-R 1.0</td> <td>120</td> <td>100</td> <td>102</td> <td>95</td> <td>75</td> </tr> <tr> <td>SVC-R 1.5</td> <td>150</td> <td>125</td> <td>110</td> <td>105</td> <td>85</td> </tr> <tr> <td>SVC-R 3.0</td> <td>192</td> <td>160</td> <td>134</td> <td>150</td> <td>110</td> </tr> </tbody> </table> | | Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | SVC-R 1.0 | 120 | 100 | 102 | 95 | 75 | SVC-R 1.5 | 150 | 125 | 110 | 105 | 85 | SVC-R 3.0 | 192 | 160 | 134 | 150 | 110 | | | | | | | | | | | | | | | | | | |
| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SVC-R 1.0 | 120 | 100 | 102 | 95 | 75 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SVC-R 1.5 | 150 | 125 | 110 | 105 | 85 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SVC-R 3.0 | 192 | 160 | 134 | 150 | 110 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>Type 2 applies to SRM 7.5 and SRM 10.0.</p> | | <p>Monophase Shunt Reactors (230 V)</p> <table border="1"> <thead> <tr> <th>Product Name</th> <th>A (mm)</th> <th>B (mm)</th> <th>C (mm)</th> <th>D (mm)</th> <th>E (mm)</th> </tr> </thead> <tbody> <tr> <td>SRM 1.0</td> <td>150</td> <td>125</td> <td>105</td> <td>-</td> <td>-</td> </tr> <tr> <td>SRM 1.5</td> <td>150</td> <td>125</td> <td>120</td> <td>105</td> <td>95</td> </tr> <tr> <td>SRM 3.0</td> <td>192</td> <td>160</td> <td>144</td> <td>150</td> <td>120</td> </tr> <tr> <td>SRM 5.0</td> <td>210</td> <td>270</td> <td>180</td> <td>195</td> <td>119</td> </tr> <tr> <td>SRM 7.5</td> <td>210</td> <td>280</td> <td>210</td> <td>232</td> <td>126</td> </tr> <tr> <td>SRM 10.0</td> <td>260</td> <td>330</td> <td>200</td> <td>232</td> <td>136</td> </tr> </tbody> </table> | | | | Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | SRM 1.0 | 150 | 125 | 105 | - | - | SRM 1.5 | 150 | 125 | 120 | 105 | 95 | SRM 3.0 | 192 | 160 | 144 | 150 | 120 | SRM 5.0 | 210 | 270 | 180 | 195 | 119 | SRM 7.5 | 210 | 280 | 210 | 232 | 126 | SRM 10.0 | 260 | 330 | 200 | 232 | 136 |
| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SRM 1.0 | 150 | 125 | 105 | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SRM 1.5 | 150 | 125 | 120 | 105 | 95 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SRM 3.0 | 192 | 160 | 144 | 150 | 120 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SRM 5.0 | 210 | 270 | 180 | 195 | 119 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SRM 7.5 | 210 | 280 | 210 | 232 | 126 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SRM 10.0 | 260 | 330 | 200 | 232 | 136 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>• Product sizes indicated in the table may vary. You can contact for detailed information.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Connection Diagram

SVC (5-10) Drive and Monophase Shunt Reactor

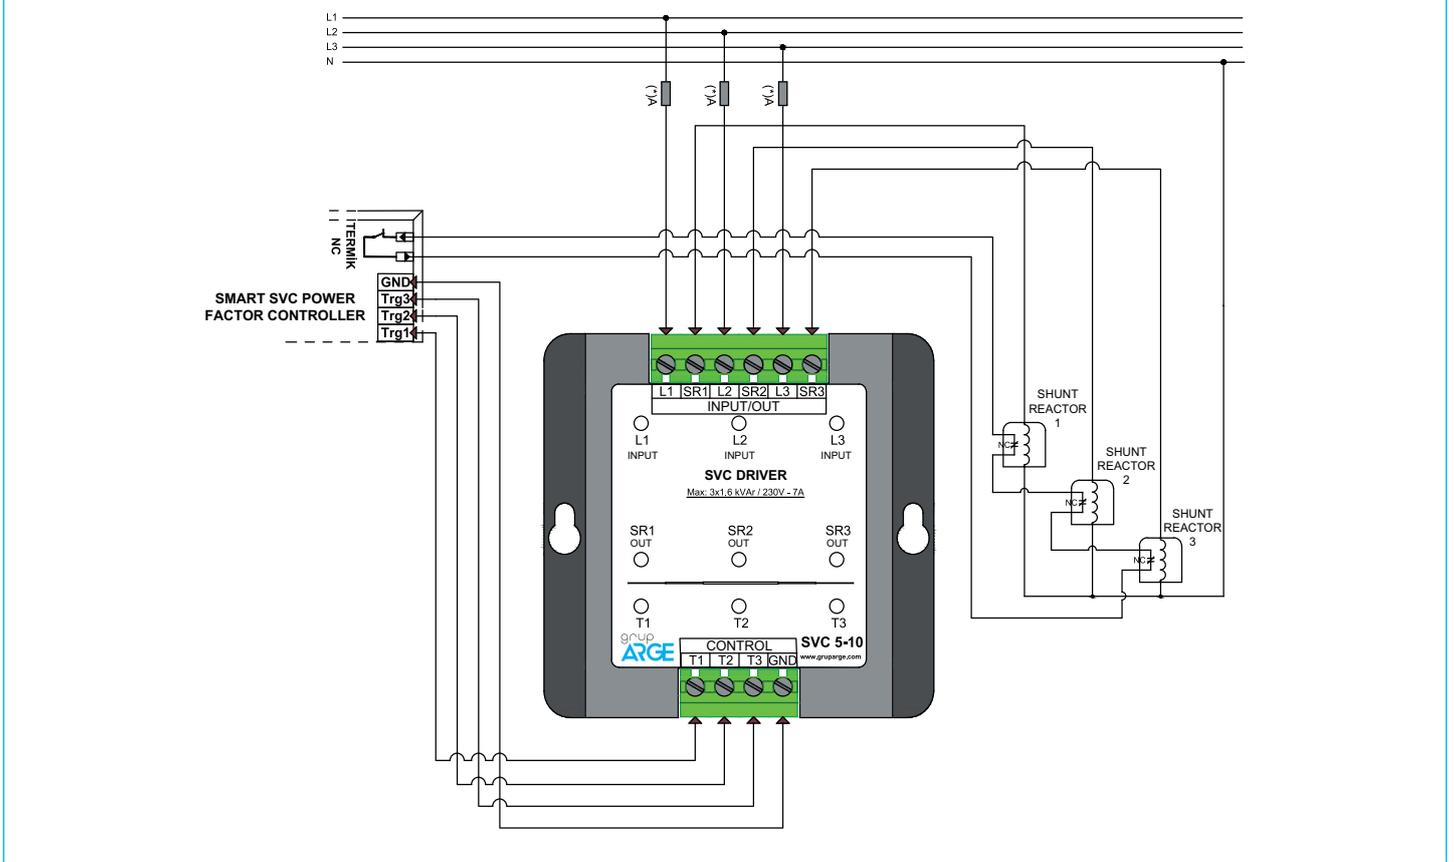

SVC (20-30) Drive and Monophase Shunt Reactor

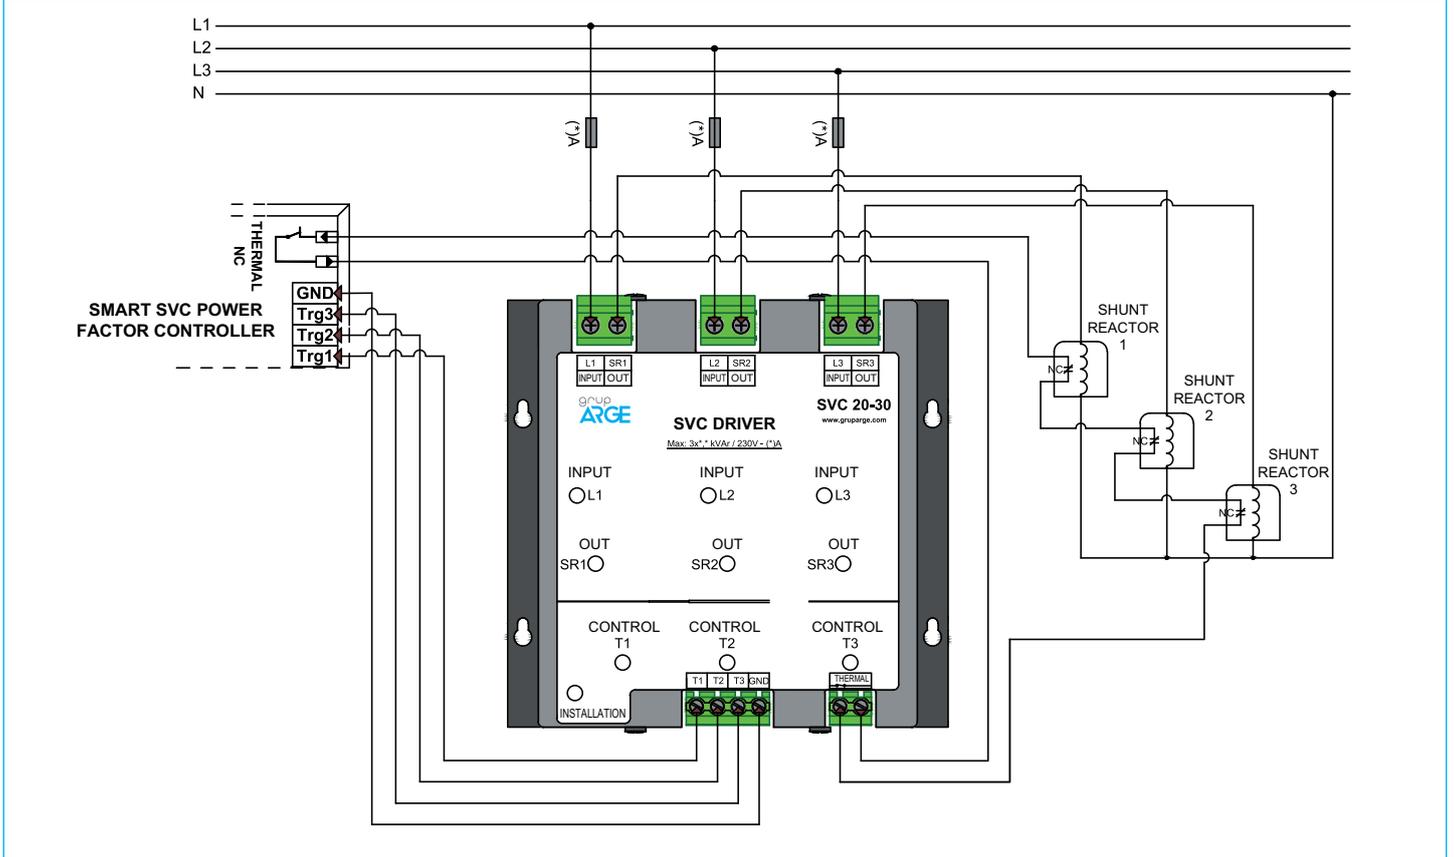

Technical Features

| Product Code | Product Name | Product Description | Power (kVAR) | A (Irms) | L (mH) | Connection | Thermal Protection | Nominal Cable Cross Section (mm ²) | Weight (kg) |
|--------------|--------------|-------------------------------------|--------------|----------|--------|------------|--------------------|--|-------------|
| GA5201 | SRT 0.5 | 0.5 kVAR THREE-PHASE SHUNT REACTOR | 0,5 | 0,72 | 1018,6 | Terminal | ✓ | 3(1x2.5) mm ² | 8,0 |
| GA5202 | SRT 1.0 | 1.0 kVAR THREE-PHASE SHUNT REACTOR | 1,0 | 1,44 | 509,0 | Terminal | ✓ | 3(1x2.5) mm ² | 11,5 |
| GA5203 | SRT 1.5 | 1.5 kVAR THREE-PHASE SHUNT REACTOR | 1,5 | 2,17 | 339,50 | Terminal | ✓ | 3(1x2.5) mm ² | 14,5 |
| GA5204 | SRT 2.5 | 2.5 kVAR THREE-PHASE SHUNT REACTOR | 2,5 | 3,61 | 203,72 | Terminal | ✓ | 3(1x2.5) mm ² | 17,0 |
| GA5205 | SRT 5.0 | 5.0 kVAR THREE-PHASE SHUNT REACTOR | 5,0 | 7,22 | 101,86 | Terminal | ✓ | 3(1x2.5) mm ² | 27,0 |
| GA5206 | SRT 7.5 | 7.5 kVAR THREE-PHASE SHUNT REACTOR | 7,5 | 10,83 | 67,90 | Terminal | ✓ | 3(1x4) mm ² | 39,0 |
| GA5207 | SRT 10.0 | 10.0 kVAR THREE-PHASE SHUNT REACTOR | 10,0 | 14,43 | 50,92 | Busbar | ✓ | 3(1x4) mm ² | 48,0 |
| GA5208 | SRT 12.5 | 12.5 kVAR THREE-PHASE SHUNT REACTOR | 12,5 | 18,04 | 40,75 | Busbar | ✓ | 3(1x4) mm ² | 57,0 |
| GA5209 | SRT 15.0 | 15.0 kVAR THREE-PHASE SHUNT REACTOR | 15,0 | 21,65 | 33,95 | Busbar | ✓ | 3(1x4) mm ² | 67,0 |
| GA5210 | SRT 20.0 | 20.0 kVAR THREE-PHASE SHUNT REACTOR | 20,0 | 28,86 | 25,46 | Busbar | ✓ | 3(1x6) mm ² | 80,0 |
| GA5211 | SRT 25.0 | 25.0 kVAR THREE-PHASE SHUNT REACTOR | 25,0 | 36,08 | 20,37 | Busbar | ✓ | 3(1x10) mm ² | 96,5 |
| GA5212 | SRT 50.0 | 50.0 kVAR THREE-PHASE SHUNT REACTOR | 50,0 | 72,20 | 10,18 | Busbar | ✓ | 3(1x35) mm ² | 170,0 |



SRT 2.5

Technical Drawing

Three-phase Shunt Reactor (400 V)

| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|--------------|--------|--------|--------|--------|--------|
| SRT 0.5 | 150 | 150 | 72 | 100 | 55 |
| SRT 1.0 | 180 | 175 | 85 | 125 | 60 |
| SRT 1.5 | 180 | 175 | 115 | 125 | 90 |
| SRT 2.5 | 240 | 225 | 100 | 175 | 75 |
| SRT 5.0 | 295 | 255 | 170 | 200 | 135 |
| SRT 7.5 | 295 | 255 | 180 | 200 | 145 |
| SRT 10.0 | 370 | 330 | 190 | 350 | 109 |
| SRT 12.5 | 390 | 330 | 210 | 350 | 119 |
| SRT 15.0 | 390 | 330 | 220 | 350 | 139 |
| SRT 20.0 | 460 | 380 | 220 | 420 | 129 |
| SRT 25.0 | 460 | 380 | 230 | 420 | 149 |
| SRT 50.0 | 520 | 430 | 290 | 510 | 229 |

• Product sizes indicated in the table may vary. You can contact for detailed information.

Connection Diagram

Three-phase Shunt Reactor (400 V)

(*)For the recommended fuse current and cable cross-section, please refer to the rated operating current table in the section related to the product of your choice.

Harmonic Filter Selection

According to the voltage harmonic values of the harmonic filters in our list, which are measured while the compensation is off;

- If THD_v < 8% and 5th voltage harmonic < 6%; p= 5.67% normal filter or p= 7% normal filter,
- If THD_v < 8% and 5th voltage harmonic > 6%; p= 5.67% reinforced filter or p= 7% reinforced filter,
- If THD_v > 8% and harmonics are to be filtered, p=5.67% reinforced filter or p=7% reinforced filter,
- If THD_v > 8% and only capacitors are to be protected from overcurrent, it is recommended to choose a filter with p=14%.

Considered Sectorally

- In small-scale enterprises with few harmonic generating devices; p=5.67% or p=7% normal filter,
- Where harmonic distortion is relatively high, such as textiles and automotive; p=5.67% or p=7% reinforced filter,
- In places such as iron and steel industry, rolling mills, foundry furnaces, p=14% filter can be used.

Other Issues to Consider

- p=5.67% filters require continuous monitoring as they are very sensitive to the loss of value in capacitors or the increase of harmonics over time. For this reason, it will be safer to use a p=7% filter if the harmonic values measured while the compensation is off are at a level that will not pose a problem for the operation.
- The harmonic filters in our list are designed for the plants where the 5th voltage harmonic does not exceed 6% and the total voltage harmonic does not exceed 8% when the compensation is off. For higher harmonic distortion values, a reinforced filter should be used. Please contact our company for reinforced filters.

Note: For a correct application, it is recommended to make measurements with an analyzer and evaluate the measurement results with our technical team.

| MONOPHASE HARMONIC FILTER - CAPACITOR | |
|---|------------------------|
| (p=%5.67 - 210 Hz; p=%7 - 189 Hz; p=%14 - 134 Hz) | |
| Harmonic Filter Code Capacitor | Capacitor Product Name |
| HRM 0.5/5.67 - HRM 0.5/7 - HRM 0.5/14 | KND M0.5 |
| HRM 1.0/5.67 - HRM 1.0/7 - HRM 1.0/14 | KND M1.0 |
| HRM 1.5/5.67 - HRM 1.5/7 - HRM 1.5/14 | KND M1.5 |
| HRM 2.5/5.67 - HRM 2.5/7 - HRM 2.5/14 | KND M2.5 |
| HRM 5.0/5.67 - HRM 5.0/7 - HRM 5.0/14 | KND M5.0 |
| HRM 7.5/5.67 - HRM 7.5/7 - HRM 7.5/14 | KND M7.5 |
| HRM 10.0/5.67 - HRM 10.0/7 - HRM 10.0/14 | KND M10.0 |

| THREE-PHASE HARMONIC FILTER - CAPACITOR | |
|---|--|
| (p=%14, 134 Hz) Harmonic Filter Code | Product Name of the Capacitor to be Used for 525 V |
| HRT 3.1 / 14 | KND B5.0 |
| HRT 5.0 / 14 | KND B7.5 |
| HRT 6.25 / 14 | KND B10.0 |
| HRT 7.5 / 14 | KND B12.5 |
| HRT 10.0 / 14 | KND B15.0 |
| HRT 12.5 / 14 | KND B20.0 |
| HRT 15.0 / 14 | KND B10.0 + KND B12.5 |
| HRT 20.0 / 14 | KND B30.0 |
| HRT 25.0 / 14 | KND B25.0 + KND B12.5 |
| HRT 30.0 / 14 | KND B25.0+ KND B20.0 |
| HRT 40.0 / 14 | 2xKND B30.0 |
| HRT 50.0 / 14 | 3xKND B25.0 |
| HRT 60.0 / 14 | 3xKND B30.0 |
| HRT 75.0 / 14 | 2xKND B40.0 + KND B30.0 |
| HRT 100.0 / 14 | 3xKND B40.0 + KND B30.0 |

| THREE-PHASE HARMONIC FILTER - CAPACITOR | | |
|--|--|--|
| (p=%5.67, 210 Hz) Harmonic Filter Code | Product Name of the Capacitor to be Used for 440 V | Product Name of the Capacitor to be Used for 525 V |
| HRT 0.5/5.67 | KND T0.5 | - |
| HRT 1.0/5.67 | KND T1.0 | - |
| HRT 1.5/5.67 | KND T1.5 | - |
| HRT 2.5/5.67 | KND T2.5 | - |
| HRT 3.1/5.67 | 2xKND T1.5 | KND B5.0 |
| HRT 5.0/5.67 | KND T5.0 | KND B7.5 |
| HRT 6.25/5.67 | KDN T5.0+KND T1.0 | KND B10.0 |
| HRT 7.5/5.67 | KND T7.5 | KND B12.5 |
| HRT 10.0/5.67 | KND T10.0 | KND B15.0 |
| HRT 12.5/5.67 | KND T12.5 | KND B20.0 |
| HRT 15.0/5.67 | KND T15.0 | KND B25.0 |
| HRT 20.0/5.67 | KND T18.6 | KND B20.0 + KND B12.5 |
| HRT 25.0/5.67 | KND T23.2 | KND B40.0 |
| HRT 30.0/5.67 | KND T15.0+KND T12.5 | 2xKND B25.0 |
| HRT 40.0/5.67 | 2xKND T18.6 | KND B40.0 + KND B25.0 |
| HRT 50.0/5.67 | 2xKND T23.2 | 2xKND B40.0 |
| HRT 60.0/5.67 | KND T30.0+KND T25.0 | 2xKND B40.0 + KND B15.0 |
| HRT 75.0/5.67 | 3xKND T23.2 | 3xKND B40.0 |
| HRT 100.0/5.67 | 4xKND T23.2 | 4xKND B40.0 |

| THREE-PHASE HARMONIC FILTER - CAPACITOR | | |
|---|--|--|
| (p=%7, 189 Hz) Harmonic Filter Code | Product Name of the Capacitor to be Used for 440 V | Product Name of the Capacitor to be Used for 525 V |
| HRT 0.5/7 | KND T0.5 | - |
| HRT 1.0/7 | KND T1.0 | - |
| HRT 1.5/7 | KND T1.5 | - |
| HRT 2.5/7 | KND T2.5 | - |
| HRT 3.1/7 | 2xKND T1.5 | KND B5.0 |
| HRT 5.0/7 | KND T5.0 | KND B7.5 |
| HRT 6.25/7 | KDN T5.0+KND T1.0 | KND B10.0 |
| HRT 7.5/7 | KND T7.5 | KND B12.5 |
| HRT 10.0/7 | KND T10.0 | KND B15.0 |
| HRT 12.5/7 | KND T12.5 | KND B20.0 |
| HRT 15.0/7 | KND T15.0 | KND B25.0 |
| HRT 20.0/7 | KND T18.6 | KND B20.0 + KND B12.5 |
| HRT 25.0/7 | KND T23.2 | KND B40.0 |
| HRT 30.0/7 | KND T15.0+KND T12.5 | 2xKND B25.0 |
| HRT 40.0/7 | 2xKND-T18.6 | KND B40.0 + KND B25.0 |
| HRT 50.0/7 | 2xKND-T23.2 | 2xKND B40.0 |
| HRT 60.0/7 | KND T30.0+KND T25 | 2xKND B40.0 + KND B20.0 |
| HRT 75.0/7 | 3xKND T23.2 | 3xKND B40.0 |
| HRT 100.0/7 | 4xKND T23.2 | 4xKND B40.0 |

• The capacitor recommended to be used for the selected harmonic filter is indicated by the product name on our price list, not by the power value.

Technical Features

| Product Code | Product Name | Product Description | A (Irms) | L (mH) | Connection | Weight (kg) |
|--------------|--------------|---|----------|--------|--------------|-------------|
| GA5629 | HRT 10/7-7 | 10 kVAr THREE-PHASE HARMONIC FILTER (7) | 15,21 | 3,84 | Terminal | 8 |
| GA5630 | HRT 12.5/7-7 | 12.5 kVAr THREE-PHASE HARMONIC FILTER (7) | 19,11 | 3,07 | Terminal | 9,3 |
| GA5631 | HRT 15/7-7 | 15 kVAr THREE-PHASE HARMONIC FILTER (7) | 24,56 | 2,56 | Terminal | 10,5 |
| GA5632 | HRT 20/7-7 | 20 kVAr THREE-PHASE HARMONIC FILTER (7) | 30,63 | 1,92 | Busbar (M8) | 13 |
| GA5633 | HRT 25/7-7 | 25 kVAr THREE-PHASE HARMONIC FILTER (7) | 36,01 | 1,53 | Busbar (M8) | 13,6 |
| GA5634 | HRT 30/7-7 | 30 kVAr THREE-PHASE HARMONIC FILTER (7) | 49,01 | 1,28 | Busbar (M8) | 17 |
| GA5635 | HRT 40/7-7 | 40 kVAr THREE-PHASE HARMONIC FILTER (7) | 60,94 | 0,96 | Busbar (M8) | 18,6 |
| GA5636 | HRT 50/7-7 | 50 kVAr THREE-PHASE HARMONIC FILTER (7) | 71,44 | 0,76 | Busbar (M8) | 21 |
| GA5637 | HRT 60/7-7 | 60 kVAr THREE-PHASE HARMONIC FILTER (7) | 88,05 | 0,64 | Busbar (M10) | 27 |
| GA5638 | HRT 75/7-7 | 75 kVAr THREE-PHASE HARMONIC FILTER (7) | 114,1 | 0,51 | Busbar (M10) | 36 |
| GA5639 | HRT 100/7-7 | 100 kVAr THREE-PHASE HARMONIC FILTER (7) | 153,0 | 0,38 | Busbar (M10) | 44 |




HRT 20.0



HRT 50.0

Technical Drawing

Three-Phase Harmonic Filter ($P=7\%$, $THD_v < 7\%$ - 189 Hz)

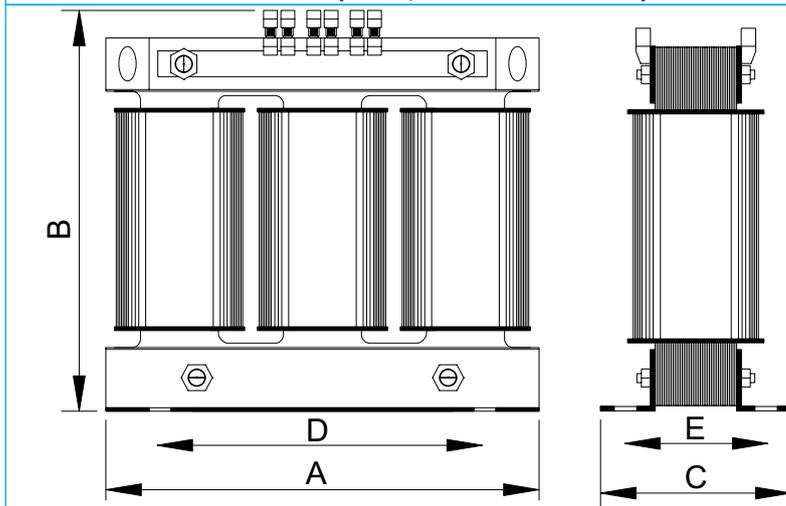


| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|--------------|--------|--------|--------|--------|--------|
| HRT 10/7-7 | 180 | 175 | 105 | 125 | 80 |
| HRT 12.5/7-7 | 180 | 175 | 105 | 125 | 80 |
| HRT 15/7-7 | 180 | 175 | 115 | 125 | 90 |
| HRT 20/7-7 | 240 | 210 | 105 | 175 | 80 |
| HRT 25/7-7 | 240 | 210 | 105 | 175 | 80 |
| HRT 30/7-7 | 240 | 210 | 125 | 175 | 100 |
| HRT 40/7-7 | 240 | 210 | 135 | 175 | 115 |
| HRT 50/7-7 | 270 | 240 | 135 | 200 | 125 |
| HRT 60/7-7 | 270 | 240 | 150 | 200 | 125 |
| HRT 75/7-7 | 295 | 255 | 175 | 200 | 135 |
| HRT 100/7-7 | 350 | 310 | 180 | 250 | 145 |

• Product sizes indicated in the table may vary. You can contact for detailed information.

Connection Diagram

Three-Phase Harmonic Filter ($P=7\%$, $THD_v < 7\%$ - 189 Hz)

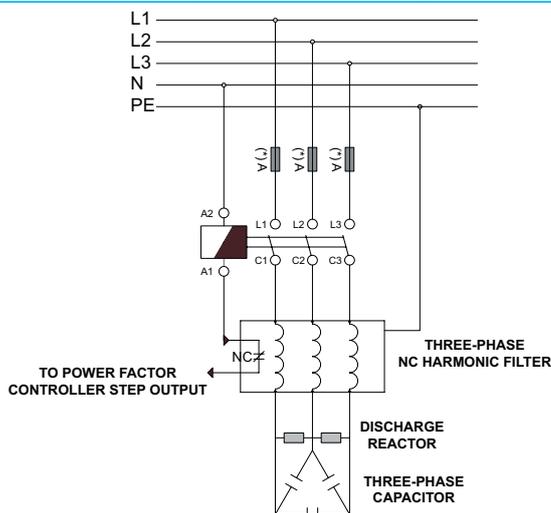

(*)For the recommended fuse current and cable cross-section, please refer to the rated operating current table in the section related to the product of your choice.

Important Note:

The product group on this page is according to the voltage harmonic values measured while the compensation is off; It should be used in enterprises with $THD_v < 7\%$ and voltage harmonics $< 5\%$. For higher harmonic distortion values, please review the description on Page 34.

Technical Features

| Monophase Harmonic Filter (P=% 5.67 - 210 Hz) | | | | | | |
|---|---------------|--|-----------------------|--------|-------------|-------------|
| Product Code | Product Name | Product Description | A (I _{rms}) | L (mH) | Connection | Weight (kg) |
| GA5311 | HRM 0.5/5.67 | 0.5 kVA _r MONOPHASE HARMONIC FILTER (5.67) | 2,60 | 20,20 | Terminal | 1,35 |
| GA5312 | HRM 1.0/5.67 | 1.0 kVA _r MONOPHASE HARMONIC FILTER (5.67) | 5,21 | 10,10 | Terminal | 1,95 |
| GA5313 | HRM 1.5/5.67 | 1.5 kVA _r MONOPHASE HARMONIC FILTER (5.67) | 7,82 | 6,73 | Terminal | 2,45 |
| GA5314 | HRM 2.5/5.67 | 2.5 kVA _r MONOPHASE HARMONIC FILTER (5.67) | 13,04 | 4,04 | Terminal | 3,80 |
| GA5315 | HRM 5.0/5.67 | 5.0 kVA _r MONOPHASE HARMONIC FILTER (5.67) | 26,08 | 2,02 | Busbar (M8) | 6,35 |
| GA5316 | HRM 7.5/5.67 | 7.5 kVA _r MONOPHASE HARMONIC FILTER (5.67) | 39,13 | 1,35 | Busbar (M8) | 8,30 |
| GA5317 | HRM 10.0/5.67 | 10.0 kVA _r MONOPHASE HARMONIC FILTER (5.67) | 52,17 | 1,01 | Busbar (M8) | 11,30 |



HRM 1.5

| Monophase Harmonic Filter (P=% 7 - 189 Hz) | | | | | | |
|--|--------------|---|-----------------------|--------|-------------|-------------|
| Product Code | Product Name | Product Description | A (I _{rms}) | L (mH) | Connection | Weight (kg) |
| GA5411 | HRM 0.5/7 | 0.5 kVA _r MONOPHASE HARMONIC FILTER (7) | 2,47 | 25,34 | Terminal | 1,3 |
| GA5412 | HRM 1.0/7 | 1.0 kVA _r MONOPHASE HARMONIC FILTER (7) | 4,95 | 12,67 | Terminal | 1,5 |
| GA5413 | HRM 1.5/7 | 1.5 kVA _r MONOPHASE HARMONIC FILTER (7) | 7,43 | 8,45 | Terminal | 2,5 |
| GA5414 | HRM 2.5/7 | 2.5 kVA _r MONOPHASE HARMONIC FILTER (7) | 12,38 | 5,07 | Terminal | 4,0 |
| GA5415 | HRM 5.0/7 | 5.0 kVA _r MONOPHASE HARMONIC FILTER (7) | 24,77 | 2,53 | Busbar (M8) | 6,5 |
| GA5416 | HRM 7.5/7 | 7.5 kVA _r MONOPHASE HARMONIC FILTER (7) | 37,16 | 1,69 | Busbar (M8) | 8,5 |
| GA5417 | HRM 10.0/7 | 10.0 kVA _r MONOPHASE HARMONIC FILTER (7) | 49,15 | 1,27 | Busbar (M8) | 11,5 |



HRM 5.0


| Monophase Harmonic Filter (P=% 14 - 134 Hz) | | | | | | |
|---|--------------|--|-----------------------|--------|-------------|-------------|
| Product Code | Product Name | Product Description | A (I _{rms}) | L (mH) | Connection | Weight (kg) |
| GA5511 | HRM 0.5/14 | 0.5 kVA _r MONOPHASE HARMONIC FILTER (14) | 2,23 | 54,52 | Terminal | 1,35 |
| GA5512 | HRM 1.0/14 | 1.0 kVA _r MONOPHASE HARMONIC FILTER (14) | 4,47 | 27,26 | Terminal | 1,95 |
| GA5513 | HRM 1.5/14 | 1.5 kVA _r MONOPHASE HARMONIC FILTER (14) | 6,71 | 18,17 | Terminal | 2,45 |
| GA5514 | HRM 2.5/14 | 2.5 kVA _r MONOPHASE HARMONIC FILTER (14) | 11,19 | 10,90 | Terminal | 3,80 |
| GA5515 | HRM 5.0/14 | 5.0 kVA _r MONOPHASE HARMONIC FILTER (14) | 22,39 | 5,45 | Busbar (M8) | 6,35 |
| GA5516 | HRM 7.5/14 | 7.5 kVA _r MONOPHASE HARMONIC FILTER (14) | 33,58 | 3,63 | Busbar (M8) | 8,30 |
| GA5517 | HRM 10.0/14 | 10.0 kVA _r MONOPHASE HARMONIC FILTER (14) | 44,78 | 2,73 | Busbar (M8) | 11,30 |



HRM 10.0

Technical Drawing

Monophase Harmonic Filter (P=%5.67, %7, %14)

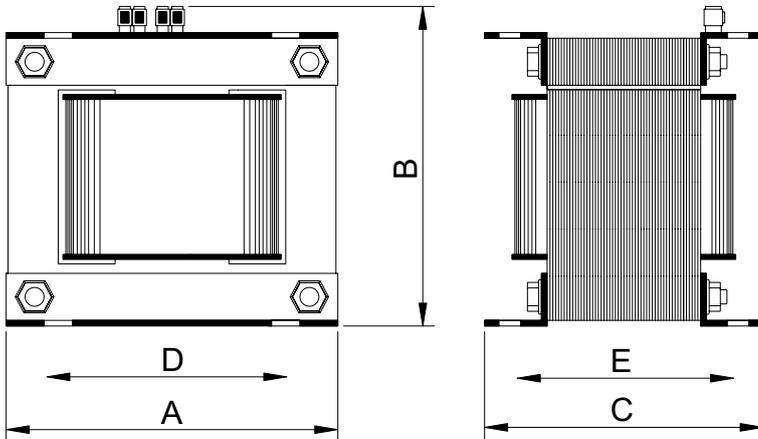

Monophase Harmonic Filter (P=%5.67)

| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|---------------|--------|--------|--------|--------|--------|
| HRM 0.5/5.67 | 84 | 70 | 60 | 70 | 45 |
| HRM 1.0/5.67 | 84 | 70 | 80 | 70 | 65 |
| HRM 1.5/5.67 | 84 | 70 | 80 | 70 | 65 |
| HRM 2.5/5.67 | 96 | 80 | 96 | 80 | 80 |
| HRM 5.0/5.67 | 120 | 100 | 98 | 100 | 80 |
| HRM 7.5/5.67 | 120 | 100 | 120 | 100 | 100 |
| HRM 10.0/5.67 | 150 | 125 | 128 | 125 | 100 |

• Product sizes indicated in the table may vary. You can contact for detailed information.

Monophase Harmonic Filter (P=%7)


| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|--------------|--------|--------|--------|--------|--------|
| HRM 0.5/7 | 84 | 70 | 60 | 70 | 45 |
| HRM 1.0/7 | 84 | 70 | 80 | 70 | 65 |
| HRM 1.5/7 | 84 | 70 | 80 | 70 | 65 |
| HRM 2.5/7 | 96 | 80 | 96 | 8 | 80 |
| HRM 5.0/7 | 120 | 100 | 98 | 100 | 80 |
| HRM 7.5/7 | 120 | 100 | 120 | 100 | 100 |
| HRM 10.0/7 | 150 | 125 | 110 | 120 | 80 |

Monophase Harmonic Filter (P=%14)

| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|--------------|--------|--------|--------|--------|--------|
| HRM 0.5/14 | 84 | 70 | 60 | 70 | 45 |
| HRM 1.0/14 | 84 | 70 | 80 | 70 | 65 |
| HRM 1.5/14 | 84 | 70 | 100 | 70 | 95 |
| HRM 2.5/14 | 96 | 80 | 96 | 80 | 80 |
| HRM 5.0/14 | 120 | 100 | 100 | 100 | 80 |
| HRM 7.5/14 | 120 | 100 | 120 | 100 | 100 |
| HRM 10.0/14 | 150 | 125 | 150 | 120 | 120 |

Connection Diagram

Monophase Harmonic Filter (P=%5.67, %7, %14)

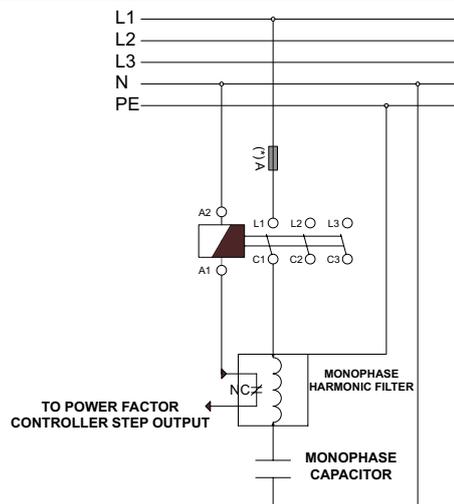

(*)For the recommended fuse current and cable cross-section, please refer to the rated operating current table in the section related to the product of your choice.

Technical Features

| Three-Phase Harmonic Filter (P=% 5.67 - 210 Hz) | | | | | | |
|---|----------------|---|-----------------------|--------|--------------|-------------|
| Product Code | Product Name | Product Description | A (I _{rms}) | L (mH) | Connection | Weight (kg) |
| GA5321 | HRT 0.5/5.67 | 5.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 0,90 | 61,20 | Terminal | 1,5 |
| GA5322 | HRT 1.0/5.67 | 1.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 1,80 | 30,61 | Terminal | 2,2 |
| GA5323 | HRT 1.5/5.67 | 1.5 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 2,81 | 20,40 | Terminal | 3,0 |
| GA5324 | HRT 2.5/5.67 | 2.5 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 4,51 | 12,24 | Terminal | 3,3 |
| GA5325 | HRT 3.12/5.67 | 3.12 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 5,63 | 9,81 | Terminal | 5,0 |
| GA5326 | HRT 5.0/5.67 | 5.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 9,02 | 6,12 | Terminal | 5,5 |
| GA5327 | HRT 6.25/5.67 | 6.25 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 11,28 | 4,90 | Terminal | 6,0 |
| GA5328 | HRT 7.5/5.67 | 7.5 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 13,53 | 4,08 | Terminal | 8,0 |
| GA5329 | HRT 10.0/5.67 | 10.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 18,04 | 3,06 | Terminal | 9,0 |
| GA5330 | HRT 12.5/5.67 | 12.5 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 22,55 | 2,45 | Terminal | 9,0 |
| GA5331 | HRT 15.0/5.67 | 15.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 27,06 | 2,04 | Terminal | 14,5 |
| GA5332 | HRT 20.0/5.67 | 20.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 36,08 | 1,53 | Busbar (M8) | 16,0 |
| GA5333 | HRT 25.0/5.67 | 25.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 45,11 | 1,22 | Busbar (M8) | 21,0 |
| GA5334 | HRT 30.0/5.67 | 30.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 49,15 | 1,02 | Busbar (M8) | 21,0 |
| GA5335 | HRT 40.0/5.67 | 40.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 72,17 | 0,76 | Busbar (M8) | 23,5 |
| GA5336 | HRT 50.0/5.67 | 50.0 kVA _r TTHREE-PHASE HARMONIC FILTER (5.67) | 90,21 | 0,61 | Busbar (M8) | 27,0 |
| GA5337 | HRT 60.0/5.67 | 60.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 108,25 | 0,51 | Busbar (M8) | 31,0 |
| GA5338 | HRT 75.0/5.67 | 75.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 120,16 | 0,41 | Busbar (M10) | 37,0 |
| GA5339 | HRT 100.0/5.67 | 100.0 kVA _r THREE-PHASE HARMONIC FILTER (5.67) | 160,21 | 0,31 | Busbar (M10) | 44,0 |



HRT 2.5

| Three-Phase Harmonic Filter (P=% 7, THD _v <%8 - 189 Hz) | | | | | | |
|--|---------------|--|-----------------------|--------|--------------|-------------|
| Product Code | Product Name | Product Description | A (I _{rms}) | L (mH) | Connection | Weight (kg) |
| GA5421 | HRT 0.5/7-8 | 0.5 kVA _r THREE-PHASE HARMONIC FILTER (7) | 0,82 | 76,67 | Terminal | 1,5 |
| GA5422 | HRT 1.0/7-8 | 1.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 1,64 | 38,33 | Terminal | 2,2 |
| GA5423 | HRT 1.5/7-8 | 1.5 kVA _r THREE-PHASE HARMONIC FILTER (7) | 2,56 | 25,53 | Terminal | 3,0 |
| GA5424 | HRT 2.5/7-8 | 2.5 kVA _r THREE-PHASE HARMONIC FILTER (7) | 4,10 | 15,32 | Terminal | 3,3 |
| GA5425 | HRT 3.12/7-8 | 3.12 kVA _r THREE-PHASE HARMONIC FILTER (7) | 5,11 | 12,28 | Terminal | 4,2 |
| GA5426 | HRT 5.0/7-8 | 5.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 8,20 | 7,66 | Terminal | 5,0 |
| GA5427 | HRT 6.25/7-8 | 6.25 kVA _r THREE-PHASE HARMONIC FILTER (7) | 10,24 | 6,13 | Terminal | 6,0 |
| GA5428 | HRT 7.5/7-8 | 7.5 kVA _r THREE-PHASE HARMONIC FILTER (7) | 12,29 | 5,11 | Terminal | 6,0 |
| GA5429 | HRT 10.0/7-8 | 10.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 16,38 | 3,83 | Terminal | 7,0 |
| GA5430 | HRT 12.5/7-8 | 12.5 kVA _r THREE-PHASE HARMONIC FILTER (7) | 20,48 | 3,06 | Terminal | 9,0 |
| GA5431 | HRT 15.0/7-8 | 15.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 24,57 | 2,55 | Terminal | 11,0 |
| GA5432 | HRT 20.0/7-8 | 20.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 32,76 | 1,92 | Busbar (M8) | 14,5 |
| GA5433 | HRT 25.0/7-8 | 25.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 41,00 | 1,53 | Busbar (M8) | 15,0 |
| GA5434 | HRT 30.0/7-8 | 30.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 49,15 | 1,28 | Busbar (M8) | 17,0 |
| GA5435 | HRT 40.0/7-8 | 40.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 65,53 | 0,96 | Busbar (M8) | 21,0 |
| GA5436 | HRT 50.0/7-8 | 50.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 82,00 | 0,77 | Busbar (M8) | 22,0 |
| GA5437 | HRT 60.0/7-8 | 60.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 98,30 | 0,64 | Busbar (M8) | 30,0 |
| GA5438 | HRT 75.0/7-8 | 75.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 119,1 | 0,51 | Busbar (M10) | 40,0 |
| GA5439 | HRT 100.0/7-8 | 100.0 kVA _r THREE-PHASE HARMONIC FILTER (7) | 158,8 | 0,38 | Busbar (M10) | 50,0 |



HRT 20.0

Technical Features


| Three-Phase Harmonic Filter (P=% 14 - 134 Hz) | | | | | | |
|---|--------------|---|-----------------------|--------|--------------|-------------|
| Product Code | Product Name | Product Description | A (I _{rms}) | L (mH) | Connection | Weight (kg) |
| GA5521 | HRT 0.5/14 | 0.5 kVAr THREE-PHASE HARMONIC FILTER (14) | 0,77 | 165,80 | Terminal | 1,8 |
| GA5522 | HRT 1.0/14 | 1.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 1,53 | 82,90 | Terminal | 2,5 |
| GA5523 | HRT 1.5/14 | 1.5 kVAr THREE-PHASE HARMONIC FILTER (14) | 2,39 | 53,15 | Terminal | 4,5 |
| GA5524 | HRT 2.5/14 | 2.5 kVAr THREE-PHASE HARMONIC FILTER (14) | 3,82 | 33,16 | Terminal | 5,0 |
| GA5525 | HRT 3.12/14 | 3.12 kVAr THREE-PHASE HARMONIC FILTER (14) | 4,77 | 26,57 | Terminal | 6,5 |
| GA5526 | HRT 5.0/14 | 5.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 7,65 | 16,58 | Terminal | 7,5 |
| GA5527 | HRT 6.25/14 | 6.25 kVAr THREE-PHASE HARMONIC FILTER (14) | 9,56 | 13,26 | Terminal | 8,5 |
| GA5528 | HRT 7.5/14 | 7.5 kVAr THREE-PHASE HARMONIC FILTER (14) | 11,47 | 11,05 | Terminal | 9,0 |
| GA5529 | HRT 10.0/14 | 10.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 15,30 | 8,29 | Terminal | 11,0 |
| GA5530 | HRT 12.5/14 | 12.5 kVAr THREE-PHASE HARMONIC FILTER (14) | 19,12 | 6,63 | Terminal | 13,5 |
| GA5531 | HRT 15.0/14 | 15.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 22,95 | 5,53 | Terminal | 14,0 |
| GA5532 | HRT 20.0/14 | 20.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 30,60 | 4,15 | Busbar (M8) | 20,5 |
| GA5533 | HRT 25.0/14 | 25.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 38,25 | 3,32 | Busbar (M8) | 22,0 |
| GA5534 | HRT 30.0/14 | 30.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 45,90 | 2,76 | Busbar (M8) | 31,0 |
| GA5535 | HRT 40.0/14 | 40.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 61,20 | 2,07 | Busbar (M8) | 35,0 |
| GA5536 | HRT 50.0/14 | 50.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 76,50 | 1,66 | Busbar (M8) | 41,0 |
| GA5537 | HRT 60.0/14 | 60.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 91,80 | 1,38 | Busbar (M8) | 44,0 |
| GA5538 | HRT 75.0/14 | 75.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 119 | 1,10 | Busbar (M10) | 72,0 |
| GA5539 | HRT 100.0/14 | 100.0 kVAr THREE-PHASE HARMONIC FILTER (14) | 159 | 0,82 | Busbar (M10) | 85,0 |



HRT 50.0


- Products without given data are produced specially to order, please contact for detailed information.
- Upon request, our harmonic filters can also be produced with copper busbar output.
- Please contact us for our boosted harmonic filters.

Connection Diagram

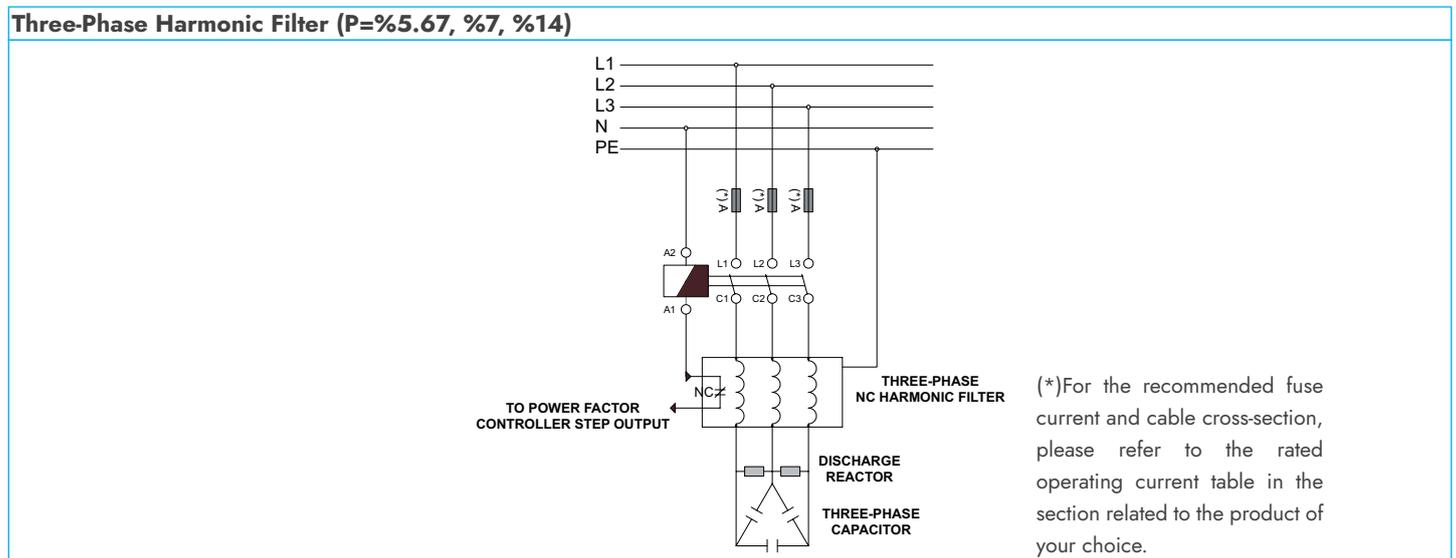

Technical Drawing

Three-Phase Harmonic Filter (P=%5.67, %7, %14)

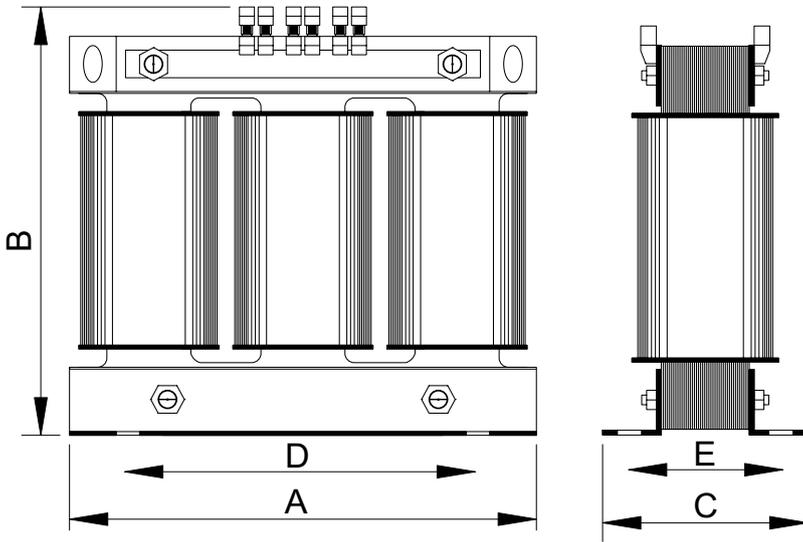

• Product sizes indicated in the table may vary. You can contact for detailed information.

Three-Phase Harmonic Filter (P=% 5.67 - 210 Hz)


| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|----------------|--------|--------|--------|--------|--------|
| HRT 0.5/5.67 | 150 | 148 | 72 | 100 | 52 |
| HRT 1.0/5.67 | 150 | 148 | 72 | 100 | 52 |
| HRT 1.5/5.67 | 150 | 148 | 72 | 100 | 52 |
| HRT 2.5/5.67 | 150 | 148 | 72 | 100 | 52 |
| HRT 3.12/5.67 | 150 | 148 | 72 | 100 | 52 |
| HRT 5.0/5.67 | 150 | 148 | 89 | 100 | 70 |
| HRT 6.25/5.67 | 180 | 170 | 97 | 125 | 72 |
| HRT 7.5/5.67 | 180 | 170 | 97 | 125 | 72 |
| HRT 10.0/5.67 | 180 | 180 | 105 | 125 | 80 |
| HRT 12.5/5.67 | 180 | 180 | 105 | 125 | 80 |
| HRT 15.0/5.67 | 235 | 230 | 100 | 175 | 80 |
| HRT 20.0/5.67 | 235 | 230 | 100 | 175 | 80 |
| HRT 25.0/5.67 | 240 | 235 | 120 | 175 | 100 |
| HRT 30.0/5.67 | 270 | 240 | 135 | 200 | 110 |
| HRT 40.0/5.67 | 270 | 240 | 150 | 200 | 125 |
| HRT 50.0/5.67 | 295 | 255 | 165 | 200 | 130 |
| HRT 60.0/5.67 | 295 | 255 | 170 | 200 | 135 |
| HRT 75.0/5.67 | 355 | 310 | 170 | 250 | 135 |
| HRT 100.0/5.67 | 355 | 310 | 190 | 250 | 155 |

Three-Phase Harmonic Filter (P=% 7, THDv<%8 - 189 Hz)

| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|---------------|--------|--------|--------|--------|--------|
| HRT 0.5/7-8 | 150 | 148 | 72 | 100 | 52 |
| HRT 1.0/7-8 | 150 | 148 | 72 | 100 | 52 |
| HRT 1.5/7-8 | 150 | 148 | 72 | 100 | 52 |
| HRT 2.5/7-8 | 150 | 148 | 72 | 100 | 52 |
| HRT 3.12/7-8 | 150 | 148 | 72 | 100 | 52 |
| HRT 5.0/7-8 | 180 | 175 | 85 | 125 | 60 |
| HRT 6.25/7-8 | 180 | 175 | 85 | 125 | 60 |
| HRT 7.5/7-8 | 180 | 175 | 105 | 125 | 80 |
| HRT 10.0/7-8 | 180 | 175 | 115 | 125 | 90 |
| HRT 12.5/7-8 | 180 | 175 | 115 | 125 | 90 |
| HRT 15.0/7-8 | 180 | 175 | 115 | 125 | 90 |
| HRT 20.0/7-8 | 240 | 210 | 105 | 175 | 80 |
| HRT 25.0/7-8 | 240 | 210 | 125 | 175 | 80 |
| HRT 30.0/7-8 | 240 | 210 | 135 | 175 | 110 |
| HRT 40.0/7-8 | 300 | 255 | 145 | 200 | 105 |
| HRT 50.0/7-8 | 270 | 240 | 150 | 200 | 125 |
| HRT 60.0/7-8 | 295 | 255 | 175 | 200 | 135 |
| HRT 75.0/7-8 | 295 | 255 | 205 | 200 | 165 |
| HRT 100.0/7-8 | 355 | 310 | 195 | 250 | 155 |

Three-Phase Harmonic Filter (P=% 14 - 134 Hz)

| Product Name | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) |
|--------------|--------|--------|--------|--------|--------|
| HRT 0.5/14 | 150 | 150 | 72 | 100 | 55 |
| HRT 1.0/14 | 150 | 150 | 72 | 100 | 55 |
| HRT 1.5/14 | 150 | 150 | 72 | 100 | 55 |
| HRT 2.5/14 | 180 | 175 | 85 | 125 | 60 |
| HRT 3.12/14 | 180 | 175 | 85 | 125 | 60 |
| HRT 5.0/14 | 180 | 175 | 115 | 125 | 90 |
| HRT 6.25/14 | 180 | 175 | 115 | 125 | 90 |
| HRT 7.5/14 | 240 | 225 | 100 | 175 | 75 |
| HRT 10.0/14 | 240 | 225 | 100 | 175 | 75 |
| HRT 12.5/14 | 240 | 225 | 100 | 175 | 75 |
| HRT 15.0/14 | 240 | 225 | 110 | 175 | 85 |
| HRT 20.0/14 | 270 | 240 | 135 | 200 | 110 |
| HRT 25.0/14 | 270 | 240 | 150 | 200 | 125 |
| HRT 30.0/14 | 295 | 255 | 165 | 200 | 130 |
| HRT 40.0/14 | 295 | 255 | 170 | 200 | 135 |
| HRT 50.0/14 | 300 | 255 | 180 | 200 | 145 |
| HRT 60.0/14 | 355 | 310 | 190 | 250 | 155 |
| HRT 75.0/14 | 355 | 310 | 210 | 250 | 175 |
| HRT 100.0/14 | 400 | 360 | 210 | 250 | 175 |

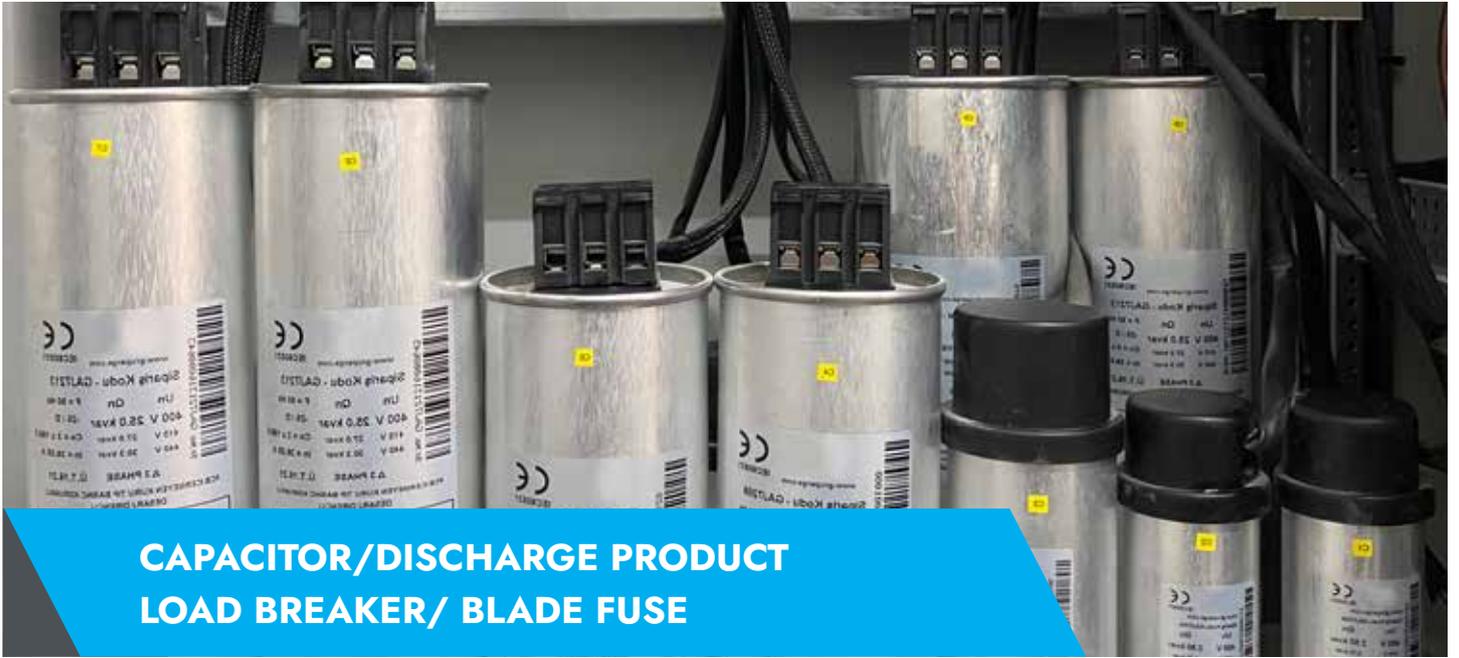

CAPACITOR/DISCHARGE PRODUCT LOAD BREAKER/ BLADE FUSE

Capacitors

Electric motors, transformer etc. power capacitors are used to meet the reactive power requirement in inductive enterprises where devices are located. Power factor controllers, contactors or semiconductor switching elements are activated and deactivated through capacitors to meet the capacitive needs of the enterprise and ensure that the reactive values remain below the desired rates.

Key Features

- **Standard:** IEC 60831-1, IEC 60831-2
- **Nominal Voltages:** 230 - 400 - 440 - 480 - 525 V AC
- **Nominal Frequency:** 50 - 60 Hz
- **Dielectric Losses:** (W /kVAr) <0,20
- **Total Losses:** (W/ kVAr) <0,4
- **Maximum Voltage:** $Un + 10\%$ (8/24 hours).
- **Maximum Current:** $1,5 \times In$
- **Capacity Tolerance:** $\% -5 - \% +10$
- **Terminal Test Voltage:** $2,15 \times Un$, AC 2S
- **Case Terminal Test Voltage:** 3 kV, AC 10S
- **Pulse Current (Inrush) Maximum:** $200 \times In$
- **Protection:** It has 3 phase circuit separator sensitive to excessive pressure.
- **Service Life Of Capacitors Under Normal Conditions:** 130.000 hours at temperature level D ($+55^\circ C$) and 150.000 hours at temperature level C ($+50^\circ C$).
- **Ambient Temperature In Operating Environment:** $-40^\circ C$ to $+55^\circ C$
- **Insulation System:** Dry type, composed of metallized polypropylene (MKP) film with selfhealing properties.
- **Absorption:** PCB-free and resinous protection.
- **Humidity In The Working Environment:** $\%95 <$
- **Discharge Time:** The internal discharge resistor can reduce the voltage across the capacitor to 50 V in 1 minute.

Discharge Reactor and Discharge Resistor

It ensures that capacitors are discharged in a short time in enterprises where there are fast loads. In this way, it extends the life of capacitors and contactors.

Key Features

- **Nominal Voltage:** 180 - 690 V AC.
- **Nominal Frequency:** 50 Hz.
- **Discharge Time:** 12,5 kVAr yük için $t < 1,2$ sn, 25 kVAr yük için $t < 2,5$ sn, 50 kVAr yük için $t < 5$ sn.
- **The Power Of The Low Voltage Capacitor To Be Discharged;** Maksimum 50 kVAr.
- 2 Units are used for the load between 50-100 kVAr
- **Mounting:** Suitable for in-panel rail mounting.
- **Protection Class:** IP40.
- Discharge reactor is recommended to be used together with compensation contactors.
- Discharge resistor is recommended to be used together with static contactor.

NH Fused Load Breakers

Grup Arge Horizontal Type Load Breakers are manufactured in accordance with TS EN 60947-3 CE norms. Body material is $960^\circ C$ heat resistant thermoplastic material and current passing parts are 99.9% purity electrolytic copper.

NH Blade Fuses

Grup Arge NH blade fuses and fuse bases are manufactured in accordance with TS EN 60269-1 standard. Steatite material, which is highly resistant to high temperatures and short circuits, is used as body material.

Technical Features


| Product Code | Product Name | Product Description | Current (A) (for 230 V) | Power kVAr | | Weight (kg) |
|--------------|--------------|--------------------------|----------------------------|------------|---------|-------------|
| | | | | 230 (V) | 400 (V) | |
| GA7101 | KND M0.25 | 0.25 kVAr 230V CAPACITOR | 1,08 | 0,25 | 0,75 | 0,60 |
| GA7102 | KND M0.5 | 0.5 kVAr 230V CAPACITOR | 2,17 | 0,50 | 1,50 | 0,60 |
| GA7103 | KND M1.0 | 1.0 kVAr 230V CAPACITOR | 4,34 | 1,00 | 3,00 | 0,70 |
| GA7104 | KND M1.5 | 1.5 kVAr 230V CAPACITOR | 6,52 | 1,50 | 4,50 | 0,70 |
| GA7105 | KND M2.5 | 2.5 kVAr 230V CAPACITOR | 10,86 | 2,50 | 7,50 | 1,15 |
| GA7106 | KND M5.0 | 5.0 kVAr 230V CAPACITOR | 21,73 | 5,00 | 15,00 | 1,65 |
| GA7107 | KND M7.5 | 7.5 kVAr 230V CAPACITOR | 32,06 | 7,50 | 22,50 | 2,90 |
| GA7108 | KND M10.0 | 10.0 kVAr 230V CAPACITOR | 43,47 | 10,00 | 30,00 | 2,90 |



KND M1.0

Technical Drawing

Monophase Capacitors (230 V)

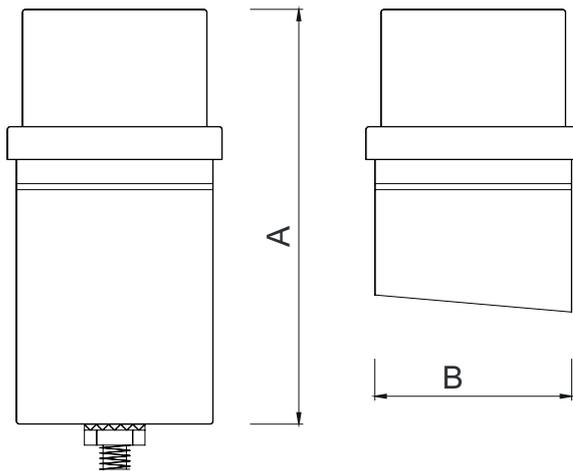


Front View

| Product Name | A (mm) | B (mm) |
|--------------|--------|--------|
| KND M0.25 | 90 | 50 |
| KND M0.5 | 100 | 50 |
| KND M1.0 | 100 | 65 |
| KND M1.5 | 130 | 65 |
| KND M2.5 | 195 | 75 |
| KND M5.0 | 205 | 90 |
| KND M7.5 | 245 | 100 |
| KND M10.0 | 245 | 117 |

Connection Diagram

Monophase Capacitors (230 V)

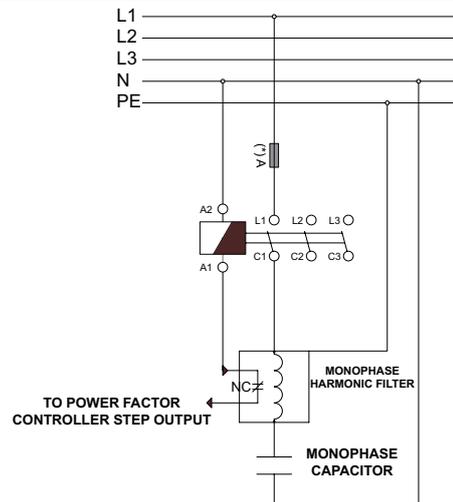

(*For the recommended fuse current and cable cross-section, please refer to the rated operating current table in the section related to the product of your choice.

Technical Features


| Product Code | Product Name | Product Description | Current (A) (for 400 V) | Power kVA | | Weight (kg) |
|--------------|--------------|------------------------------------|----------------------------|-----------|---------|-------------|
| | | | | 400 (V) | 440 (V) | |
| GA7201 | KND T0.5 | 0.5/0.61 kVA 400V/440V CAPACITOR | 0,72 | 0,5 | 0,61 | 0,60 |
| GA7202 | KND T1.0 | 1.0/1.21 kVA 400V/440V CAPACITOR | 1,44 | 1,0 | 1,21 | 0,60 |
| GA7203 | KND T1.5 | 1.5/1.82 kVA 400V/440V CAPACITOR | 2,16 | 1,5 | 1,82 | 0,60 |
| GA7204 | KND T2.5 | 2.5/3.03 kVA 400V/440V CAPACITOR | 3,60 | 2,5 | 3,03 | 0,70 |
| GA7205 | KND T5.0 | 5.0/6.05 kVA 400V/440V CAPACITOR | 7,21 | 5,0 | 6,05 | 1,10 |
| GA7206 | KND T7.5 | 7.5/9.08 kVA 400V/440V CAPACITOR | 10,82 | 7,5 | 9,08 | 1,10 |
| GA7207 | KND T10.0 | 10.0/12.1 kVA 400V/440V CAPACITOR | 14,43 | 10,0 | 12,10 | 1,70 |
| GA7208 | KND T12.5 | 12.5/15.12 kVA 400V/440V CAPACITOR | 18,04 | 12,5 | 15,12 | 1,70 |
| GA7209 | KND T15.0 | 15.0/18.15 kVA 400V/440V CAPACITOR | 21,65 | 15,0 | 18,15 | 1,85 |
| GA7210 | KND T18.6 | 18.6/22.5 kVA 400V/440V CAPACITOR | 26,87 | 18,6 | 22,50 | 2,45 |
| GA7211 | KND T20.0 | 20.0/24.2 kVA 400V/440V CAPACITOR | 28,86 | 20,0 | 24,20 | 2,90 |
| GA7212 | KND T23.2 | 23.2/28.1 kVA 400V/440V CAPACITOR | 33,50 | 23,2 | 28,10 | 3,15 |
| GA7213 | KND T25.0 | 25.0/30.25 kVA 400V/440V CAPACITOR | 36,08 | 25,0 | 30,25 | 3,30 |
| GA7214 | KND T30.0 | 30.0/36.3 kVA 400V/440V CAPACITOR | 43,30 | 30,0 | 36,30 | 3,45 |



KND T5.0

Technical Drawing

Three-phase Capacitors (400 / 440 V)

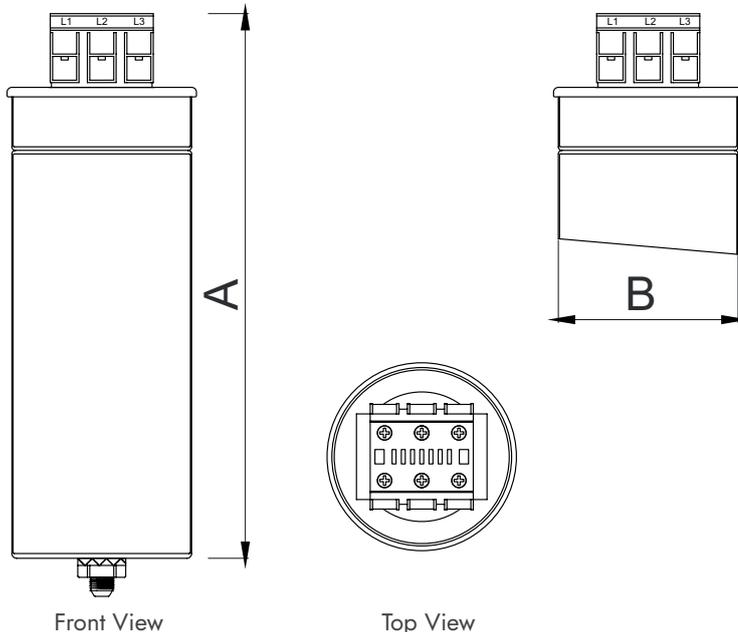

| Product Name | A (mm) | B (mm) |
|--------------|--------|--------|
| KND T0.5 | 125 | 50 |
| KND T1.0 | 125 | 50 |
| KND T1.5 | 125 | 50 |
| KND T2.5 | 150 | 50 |
| KND T5.0 | 140 | 75 |
| KND T7.5 | 195 | 75 |
| KND T10.0 | 205 | 90 |
| KND T12.5 | 205 | 90 |
| KND T15.0 | 245 | 90 |
| KND T18.6 | 245 | 100 |
| KND T20.0 | 245 | 100 |
| KND T23.2 | 245 | 117 |
| KND T25.0 | 245 | 117 |
| KND T30.0 | 245 | 117 |

Technical Features

| Product Code | Product Name | Product Description | Current (A) (for 525 V) | Power kVAr | | Weight (kg) |
|--------------|--------------|--------------------------|----------------------------|------------|---------|-------------|
| | | | | 480 (V) | 525 (V) | |
| GA7301 | KND B5.0 | 5.0 kVAr 525V CAPACITOR | 5,50 | 4,16 | 5,0 | 1,25 |
| GA7302 | KND B7.5 | 7.5 kVAr 525V CAPACITOR | 8,25 | 6,25 | 7,5 | 1,25 |
| GA7303 | KND B10.0 | 10.0 kVAr 525V CAPACITOR | 11,00 | 8,3 | 10,0 | 1,75 |
| GA7304 | KND B12.5 | 12.5 kVAr 525V CAPACITOR | 13,75 | 10,4 | 12,5 | 1,75 |
| GA7305 | KND B15.0 | 15.0 kVAr 525V CAPACITOR | 16,50 | 12,5 | 15,0 | 1,90 |
| GA7306 | KND B20.0 | 20.0 kVAr 525V CAPACITOR | 21,99 | 16,7 | 20,0 | 2,85 |
| GA7307 | KND B25.0 | 25.0 kVAr 525V CAPACITOR | 27,49 | 20,9 | 25,0 | 2,95 |
| GA7308 | KND B30.0 | 30.0 kVAr 525V CAPACITOR | 32,99 | 25,0 | 30,0 | 2,95 |
| GA7309 | KND B40.0 | 40.0 kVAr 525V CAPACITOR | 44,00 | 33,3 | 40,0 | 3,85 |



KND B12.5

- The service life of capacitors under normal conditions is 130.000 hours at temperature level D (55 °C), is 150.000 hours at temperature level C (50 °C)
- Capacitors must be placed vertically in the panel.
- Please contact us for different voltage ratings.

Technical Drawing

Three-phase Capacitors (525 V)

| Product Name | A (mm) | B (mm) |
|--------------|--------|--------|
| KND B5.0 | 140 | 75 |
| KND B7.5 | 195 | 75 |
| KND B10.0 | 205 | 85 |
| KND B12.5 | 205 | 90 |
| KND B15.0 | 245 | 90 |
| KND B20.0 | 245 | 100 |
| KND B25.0 | 245 | 117 |
| KND B30.0 | 245 | 117 |
| KND B40.0 | 243 | 136 |

Connection Diagram

Three-phase Capacitors (525 V)

(*)For the recommended fuse current and cable cross-section, please refer to the rated operating current table in the section related to the product of your choice.

Technical Features


| Product Code | Product Name | Product Description | Description | Max. Power | Max. Voltage |
|--------------|--------------|--------------------------|---|---------------------|--------------|
| GA7401 | DRJ R11 | DISCHARGE REACTOR | It is used for the discharge of capacitors in a short time ($t < 5$ sec) in enterprises with fast loads. | 50 kVA _r | 480 V |
| GA7402 | DRJ D12 | DISCHARGE RESISTOR (22K) | It is used for discharging capacitors in a short time in enterprises with fast loads. | 50 kVA _r | 480 V |

- It is recommended to use the discharge reactor together with compensation contactors.
- It is recommended to use the discharge resistor together with the static contactor.





DRJ R11

Technical Drawing

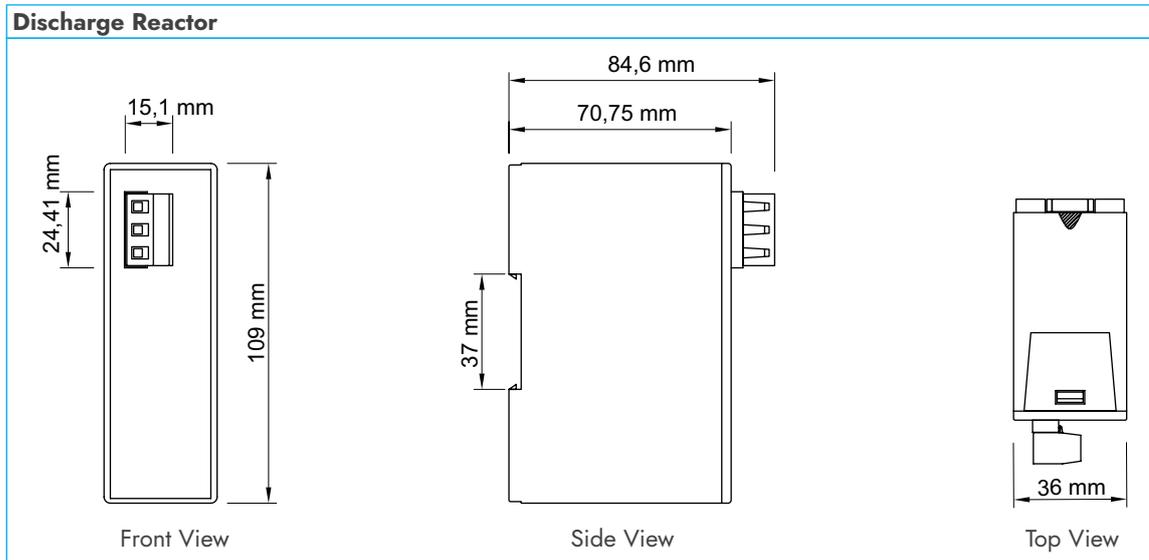

DRJ R12

Connection Diagram

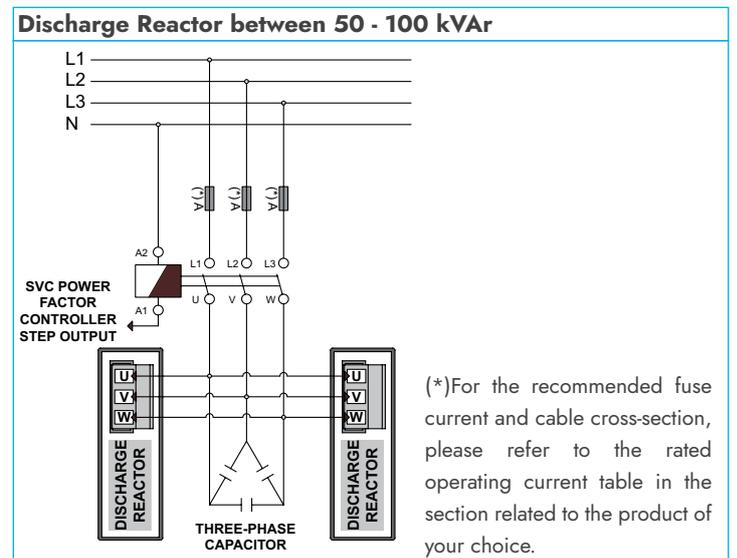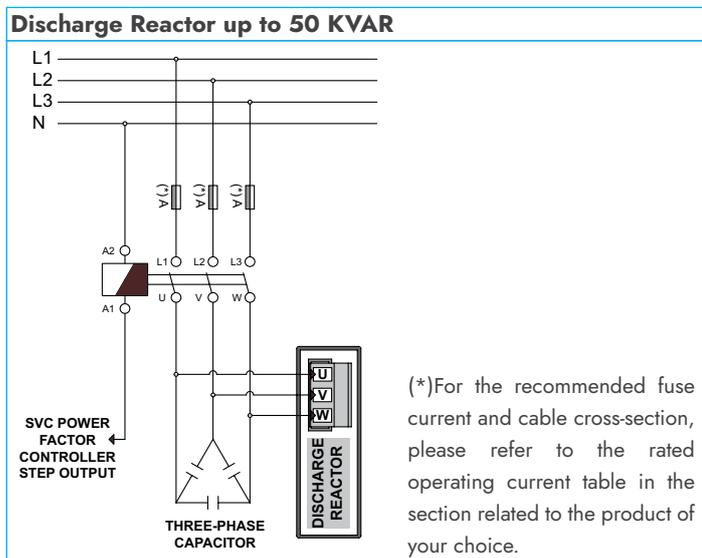

Technical Features


| Product Code | Product Name | Product Description | Size | Number of Poles | Rated Operating Current In (A) | Rated Voltage (V) | Rated Insulation Voltage (V) | Breaking Capacity of Fuse (kA) | I/Ic | Weight (kg) |
|--------------|--------------|---------------------|------|-----------------|--------------------------------|-------------------|------------------------------|--------------------------------|-------|-------------|
| GA7511 | YA-160 | 160 A LOAD BREAKERS | NH00 | 3 | 160 | 690 | 800 | 120 | AC22B | 0,7 |
| GA7512 | YA-250 | 250 A LOAD BREAKERS | NH1 | 3 | 250 | 690 | 800 | 120 | AC23B | 1,5 |




YA - 250

Technical Drawing

LOAD BREAKERS 160 A

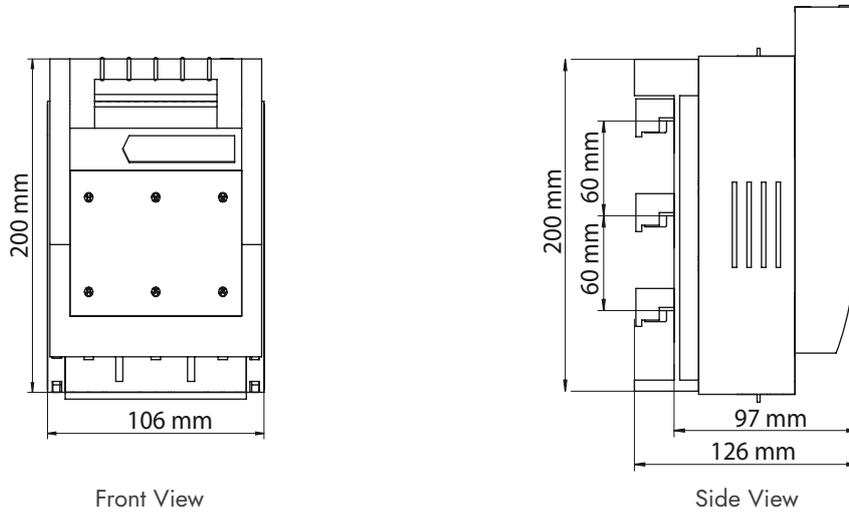

LOAD BREAKERS 250 A

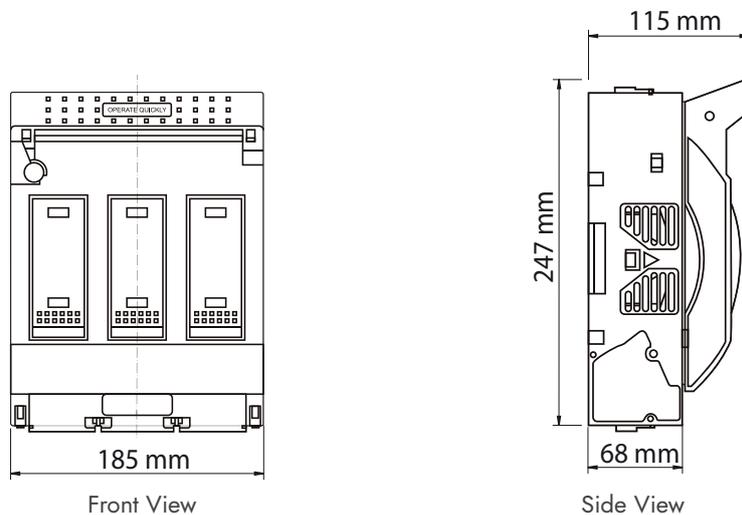

Technical Features



| Product Code | Product Name | Product Description | Size | Rated Current In (A) | Breaking Capacity (kA) |
|--------------|--------------|---------------------|------|----------------------|------------------------|
| GA7521 | NH 16 | 16 A NH BLADE FUSE | NH00 | 16 | 120 |
| GA7522 | NH 25 | 25 A NH BLADE FUSE | NH00 | 25 | 120 |
| GA7523 | NH 32 | 32 A NH BLADE FUSE | NH00 | 32 | 120 |
| GA7524 | NH 50 | 50 A NH BLADE FUSE | NH00 | 50 | 120 |
| GA7525 | NH 63 | 63 A NH BLADE FUSE | NH00 | 63 | 120 |
| GA7526 | NH 80 | 80 A NH BLADE FUSE | NH00 | 80 | 120 |
| GA7527 | NH 100 | 100 A NH BLADE FUSE | NH00 | 100 | 120 |
| GA7528 | NH 125 | 125 A NH BLADE FUSE | NH00 | 125 | 120 |
| GA7529 | NH 160 | 160 A NH BLADE FUSE | NH00 | 160 | 120 |
| GA7530 | NH 250 | 250 A NH BLADE FUSE | NH1 | 250 | 120 |



NH 250

Technical Drawing

NH Blade Fuse

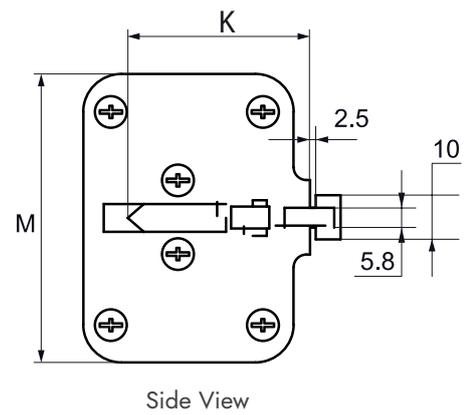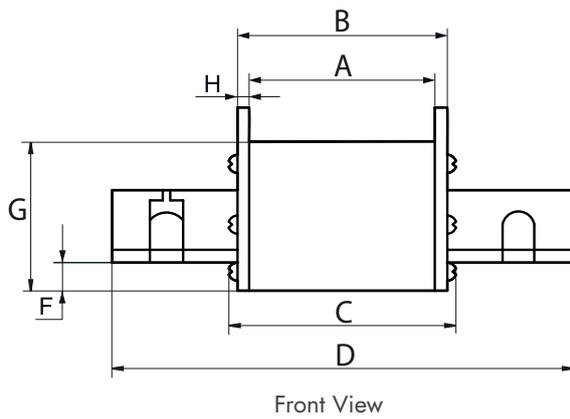


DIMENSIONS (mm)

| TYPE | A | B | C | D | E | F | G | H | K | M |
|------|----|----|----|-----|----|----|----|-----|----|----|
| NH00 | 47 | 50 | 54 | 79 | 15 | 12 | 45 | 1,5 | 35 | 29 |
| NH1 | 62 | 66 | 72 | 135 | 20 | 11 | 48 | 2 | 40 | 48 |



*You can scan the QR code to visit our website.



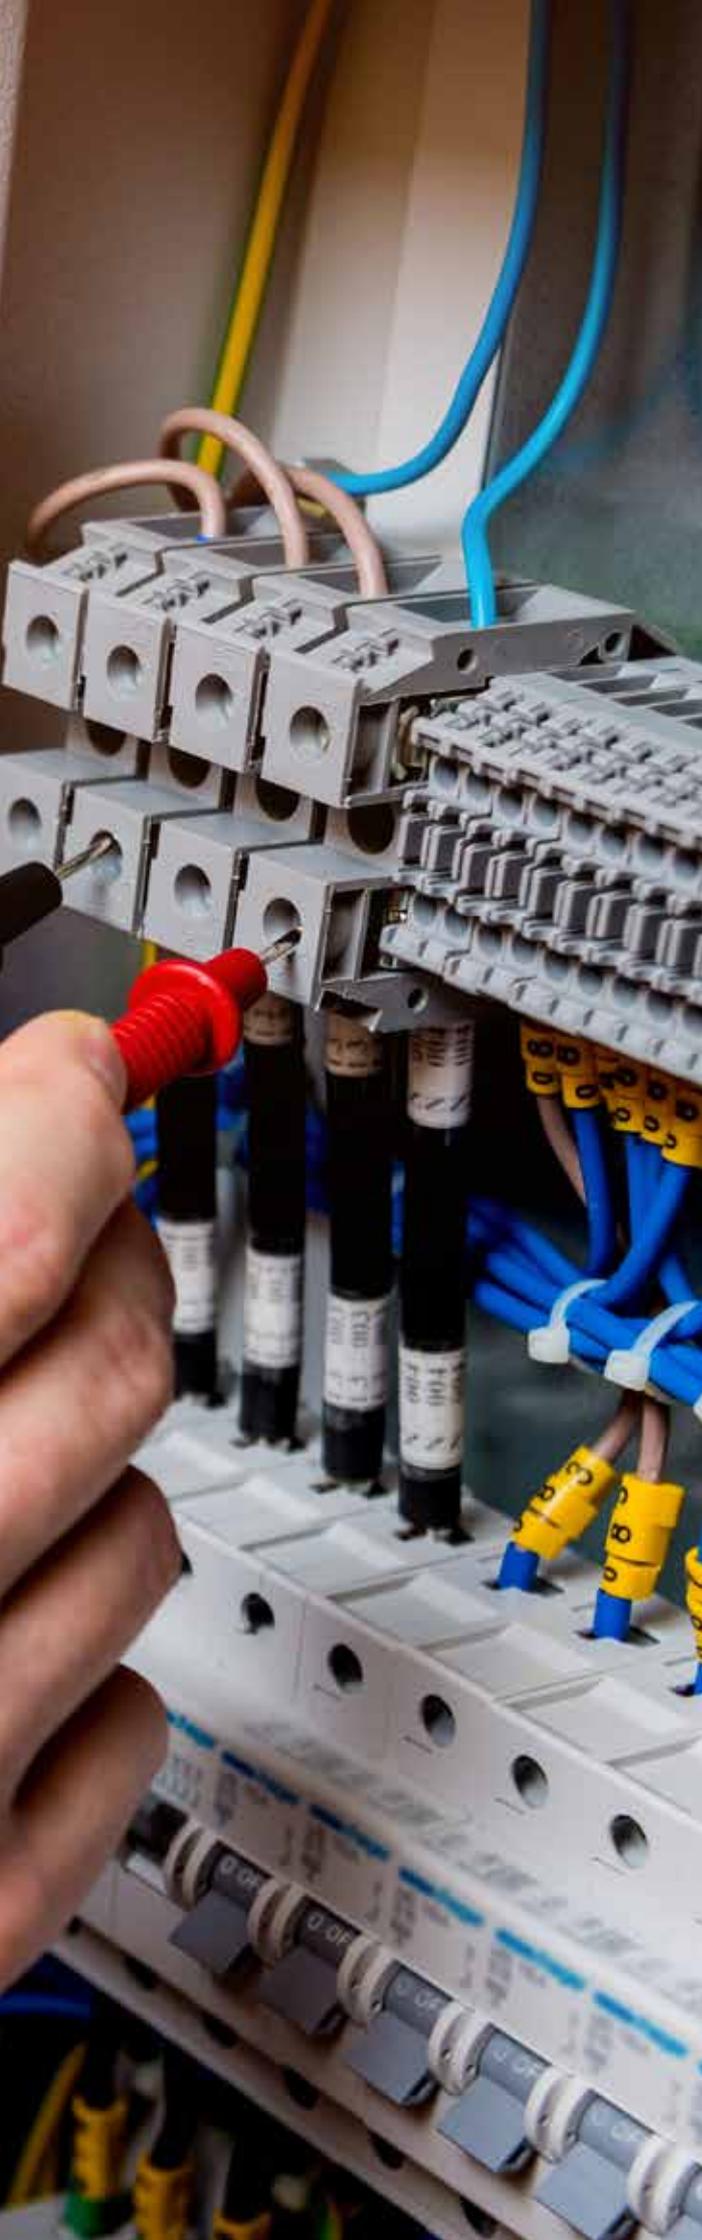

Network Analyzer

3 phase currents and neutral current, phase-neutral and phase-phase voltages, frequency, active and reactive powers, angle difference between current and voltage, power factor, current and voltage harmonics between 1-63 and current and voltage Total Harmonic Distortion values of each phase can be measured and monitored on the screen. In addition, it reads and records active and reactive energies. It is also possible to monitor the demand and peak values for these measured quantities on the analyzer. Many necessary adjustments related to the device (Current Transformer, Voltage Transformer etc.) can be made through the menu. In the communicated versions, all read parameters can be monitored remotely via the standard MODBUS protocol and various adjustments can be made. In the versions of our network analyzer with SD card feature, the electrical quantities selected for recording can be periodically recorded on the SD card.

Power Analyzer

3 phase current, phase-neutral and phase-phase voltages, frequency, active and reactive powers, angle difference between current and voltage, power factor values can be measured and monitored on the screen. In addition, it reads and records active and reactive energies. It is also possible to monitor the demand and peak values for these measured quantities on the analyzer. Many necessary adjustments related to the device (Current Transformer Ratio, Voltage Transformer Ratio etc.) can be made through the menu. In the communicated versions, all read parameters can be monitored remotely via the standard Modbus protocol and various adjustments can be made. In the versions with output contact, the device can output within the set value range for the quantities (Current, Voltage, Active and Reactive Power, Cos, Pf etc.) selected via the menu.

Multimeter

The multimeter measures and calculates the current and voltage values of 3 phases as True RMS. Along with these quantities, it also measures the frequency and shows the measured values on its screen. Optionally, it can also measure the earth voltage and display the measured values on the screen. Through the menu, current transformer and voltage transformer settings can be made. The versions with output feature can output according to the current and voltage value ranges set via the menu. With the new supply design, the multimeter does not require a separate supply input. If there is energy in any voltage phase (85-265 Volts), the device can operate.

Voltmeter

They are devices which are produced in order to measure and continuously monitor the AC voltage values of three phases. It is connected to the circuit in parallel.

Ammeter

They are devices produced for the purpose of measuring and monitoring the AC current drawn by loads. It is connected to the circuit in series.

| | |
|--------------------------------------|----|
| Analizers | 52 |
| Multimeters | 55 |
| Voltmeters | 56 |
| Ammeters | 57 |
| XLPE Cable Type Current Transformers | 58 |
| LV Current Transformers | 60 |

Key Features

- It is microprocessor based.
- **Phase to Phase, Line Voltage:** It can be adjusted in the range of 173-46000 V
- **Current Transformer Ratio:** It can be adjusted between 5/5 and 10000/5
- **Output:** 1 digital output with optocoupler.
- **Communication Protocol:** RS-485 Standard Modbus RTU.
- **Connection:** Supports RS-485 connection.
- **Compatibility:** Optionally compatible with CT30 type current transformer.
- **Power Consumption of Measurement Inputs:** <1 VA
- **Voltage Measurement Range:** 22-725 V AC (45-55 Hz)
- **Minimum Measurement Value:** 1mA / 2 V stop.

- **Measurement Sensitivity:** 1mA / 0.1 V
- **Protection Class:** IP20 protection class.
- **Measurement of Current and Voltage**
- **Harmonics:** Between 1-63
- It periodically saves the peak values of all parameters in its memory.
- Energy values are periodically saved in the permanent memory, even if the power is cut off, the device continues to save energy values from where it left off when the device is turned on again.
- Energy, demand and peak values of all parameters can be reset from the menu.
- The device can save the measured quantities to the SD card for up to 250 hours with a period adjustable between 500 ms - 25 s




ANL 21


Technical Features

| Product Code | Product Name | Product Description | CT30 | X/5 A | RS-485 Communication | TFT Screen | Digital Input | Digital Output | Internal Memory Input (Max: 256 GB) | USB Input | Harmonic Measurement |
|--------------|--------------|---|------|-------|----------------------|------------|---------------|----------------|-------------------------------------|-----------|----------------------|
| GA4121 | ANL 21 | DIGITAL OUTPUT NETWORK ANALYZER | | ✓ | ✓ | ✓ | 2 | 1 | ✓ | ✓ | 63 |
| GA4122 | ANL 22 | DIGITAL OUTPUT NETWORK ANALYZER (CT30 AT) | ✓ | | ✓ | ✓ | 2 | 1 | ✓ | ✓ | 63 |

Technical Drawing

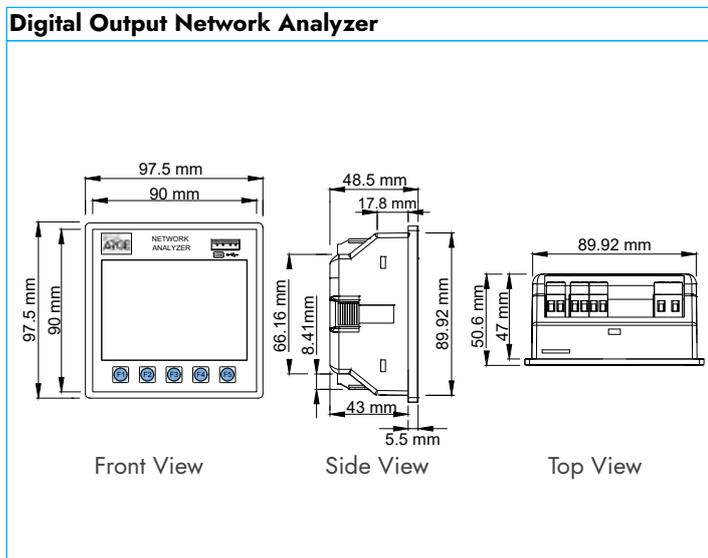

Connection Diagram

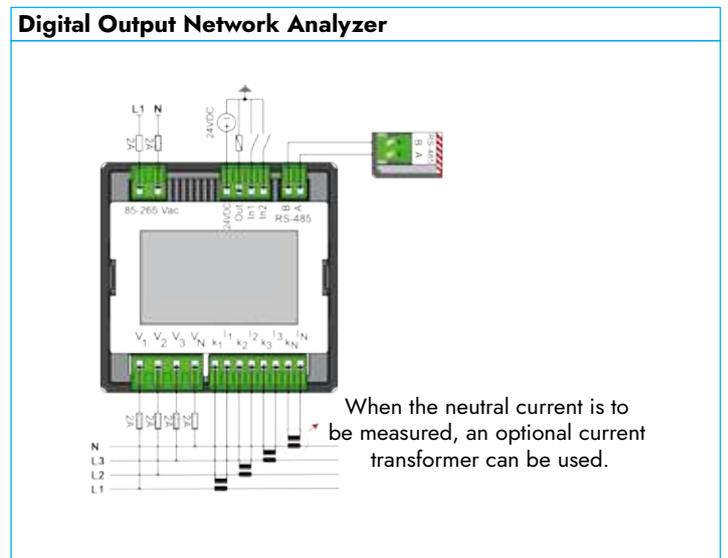

Key Features

- It is microprocessor based.
- **Phase to Phase, Line Voltage:** It can be adjusted in the range of 190-36200 V
- **Current Transformer Ratio:** It can be adjusted between 5/5 and 10000/5
- **Output:** Optionally, it has 2 pieces 5 A relay outputs.
- **Communication Protocol:** RS-485 Standard Modbus RTU
- **Connection:** Supports RS-485 connection.
- **Compatibility:** Optionally compatible with CT30 type current transformer.
- **Power Consumption of Measurement Inputs:** <1 VA
- **Power Consumption:** Less than 10.5 VA in relayoutput model and less than 9 VA in normal model.

- **Voltage Measurement Range Phase-Neutral:** 10-280 V AC, 45-55 Hz, phase-phase; 10-480 V AC, 45-55 Hz.
- **Minimum Measurement Value:** 2mA / 10 V.
- **Measurement Accuracy:** 1%
- **Protection Class:** IP20 protection class.
- It periodically saves the peak values of all parameters in permanent memory.
- Energy values are periodically saved in permanent memory, even if the power is cut off, the device continues to save energy values from where it left off when the device is turned on again.
- Energy, demand and peak values of all parameters can be reset from the menu.




ANL 11


Technical Features

| Product Code | Product Name | Product Description | CT30 | X/5 A | RS-485 Communication | 7-Segment Screen | Relay Output |
|--------------|--------------|--|------|-------|----------------------|------------------|--------------|
| GA4111 | ANL 11 | POWER ANALYZER | | ✓ | | ✓ | |
| GA4112 | ANL 12 | POWER ANALYZER (30 AT) | ✓ | | | ✓ | |
| GA4113 | ANL 13 | COMMUNICATION POWER ANALYZER | | ✓ | ✓ | ✓ | |
| GA4114 | ANL 14 | COMMUNICATION POWER ANALYZER (CT30 AT) | ✓ | | ✓ | ✓ | |
| GA4115 | ANL 15 | COMMUNICATION POWER ANALYZER WITH RELAY OUTPUT | | ✓ | ✓ | ✓ | 2 |
| GA4116 | ANL 16 | COMMUNICATION POWER ANALYZER WITH RELAY OUTPUT (CT30 AT) | ✓ | | ✓ | ✓ | 2 |

Technical Drawing

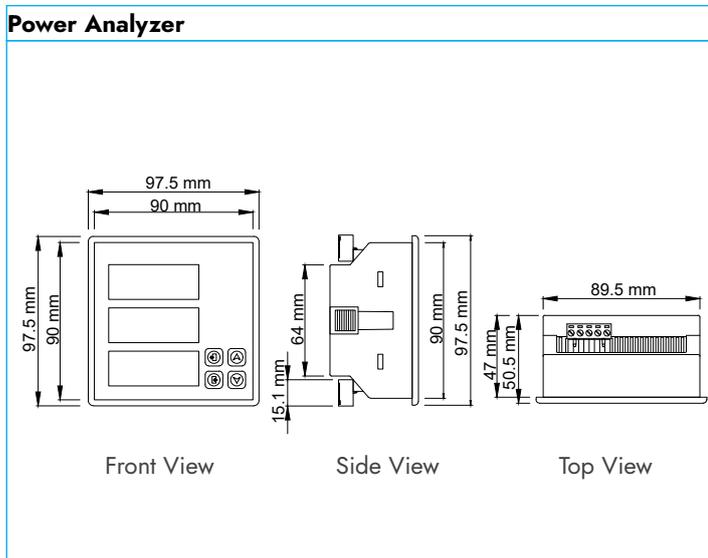

Connection Diagram

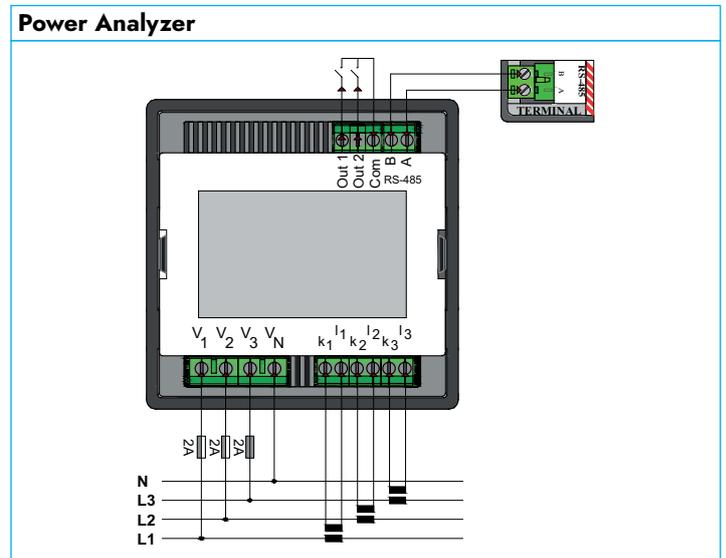

Key Features

- It is microprocessor based.
- **Phase-to-Phase, Line Voltage:** It can be adjusted in the range of 190-36200 V
- **Current Transformer Ratio:** Adjustable between 5/5 and 10000/5
- **Mounting:** Suitable for in-panel rail mounting.
- **Communication Protocol:** RS-485 Standard Modbus RTU.
- **Connection:** Supports RS-485 connection.
- **Compatibility:** Optionally compatible with CT30 type current transformer.
- **LED Status:** It has LEDs indicating power, RS-485, L1-L2-L3 and error status.
- **Operating Voltage:** 180-230 V AC
- **Power Consumption:** <2.5 VA
- **Power Consumption of Measurement Inputs:** <1 VA

- **Minimum Measurement Value:** 2mA / 10 V
- **Voltage Measurement Range Phase-Neutral:** 10-280 V AC, 45-55 Hz, phase-phase; 10-485 V AC, 45-55 Hz
- **Measurement Sensitivity:** 1%
- It periodically saves the peak values of all parameters in its memory.
- It has 3 different modes as automatic, manual and reverse to adjust the polarity direction of current transformers.
- Energy values are periodically saved in the permanent memory, even if the power is cut off, the device continues to save energy values from where it left off when it is turned on again.
- Demand values are periodically recorded in the permanent memory. Demand values are not lost when the energy is cut off.




ANL 31


Technical Features

| Product Code | Product Name | Product Description | CT30 | X/5 A | RS-485 Communication |
|--------------|--------------|------------------------------------|------|-------|----------------------|
| GA4131 | ANL 31 | RAIL TYPE POWER ANALYZER | | ✓ | ✓ |
| GA4132 | ANL 32 | RAIL TYPE POWER ANALYZER (CT30 AT) | ✓ | | ✓ |

Technical Drawing

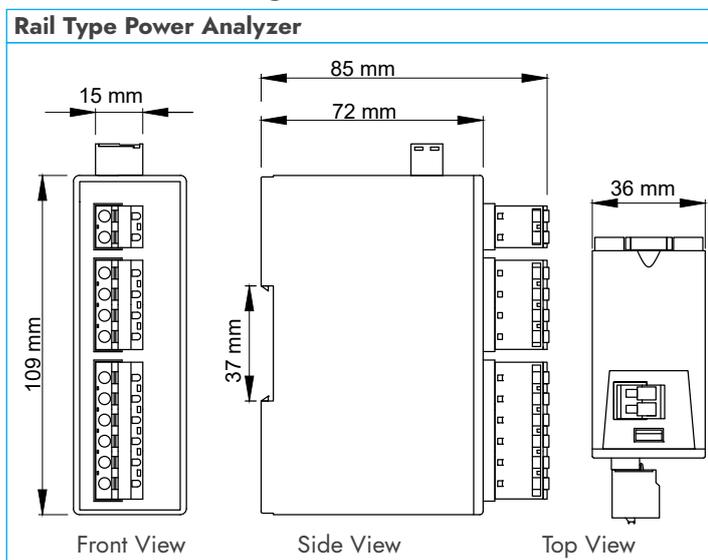

Connection Diagram

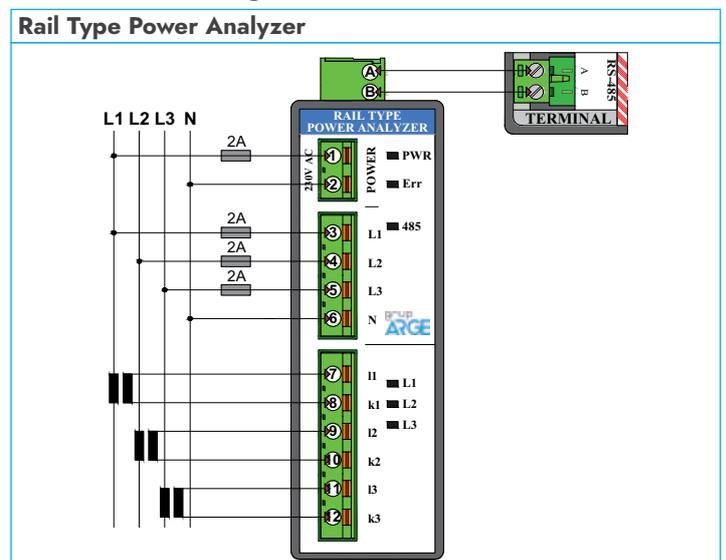

Key Features

- It is microprocessor based.
- **Phase to Phase, Line Voltage:** It can be adjusted in the range of 190-36200 V
- **Current Transformer Ratio:** It can be adjusted between 5/5 and 10000/5
- **Output:** It has 2 pieces 5 A relay outputs optionally.
- **Compatibility:** Optionally compatible with CT30 type current transformer.
- **Operating Voltage:** 180-265 V AC
- **Operating Frequency:** 45-65 Hz
- **Power Consumption of Measurement Inputs:** <1 VA
- **Minimum Measurement Values:** 25mA / 10 V stop.
- **Measurement Accuracy:** 1%

- **Screen:** There are 3 pieces 4-digit 7-segment displays.
- **Voltage Measurement Range Phase-Neutral:** 10-280 V AC, 45-65 Hz, phase-phase; 480 V AC, 45-65 Hz
- **Measurement:** It can measure phase-phase and phase-neutral voltages, current and frequency of three phases.
- **Power Consumption:** Less than 8.5 VA in relay output model and less than 7 VA in normal model.
- **Polarity Direction Adjustment:** Current transformers have 3 different modes as automatic, manual and reverse to adjust the polarity direction.
- **Protection Class:** IP20




MTM 13


Technical Features

| Product Code | Product Name | Product Description | CT30 | X/5 A | 3*V / 3*VL-L | 3 * I | Neutral-Earth Voltage | 85-265 V AC | Frequency | Voltage-Current-Frequency Averages | Output Control (2 pieces) | 7-Segment Screen |
|--------------|--------------|--------------------------------------|------|-------|--------------|-------|-----------------------|-------------|-----------|------------------------------------|---------------------------|------------------|
| GA4211 | MTM 11 | MULTIMETER | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| GA4212 | MTM 12 | MULTIMETER (CT30 AT) | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ |
| GA4213 | MTM 13 | MULTIMETER W/ RELAY OUTPUT | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| GA4214 | MTM 14 | MULTIMETER W/ RELAY OUTPUT (CT30 AT) | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Technical Drawing

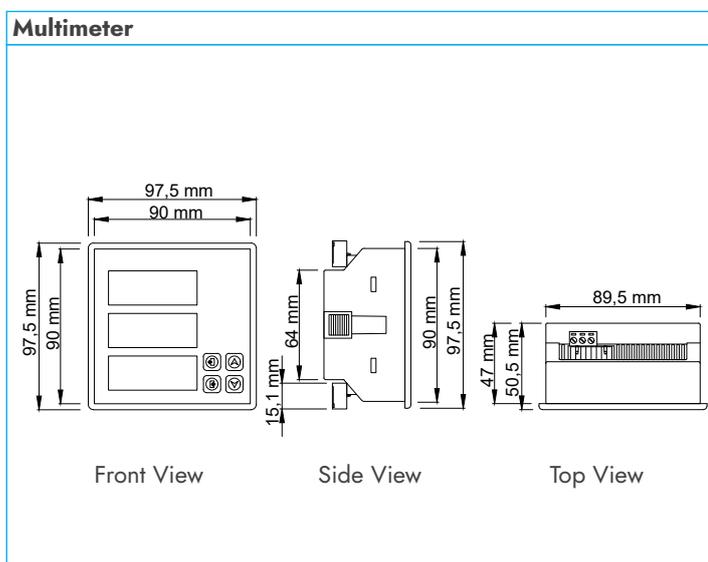

Connection Diagram

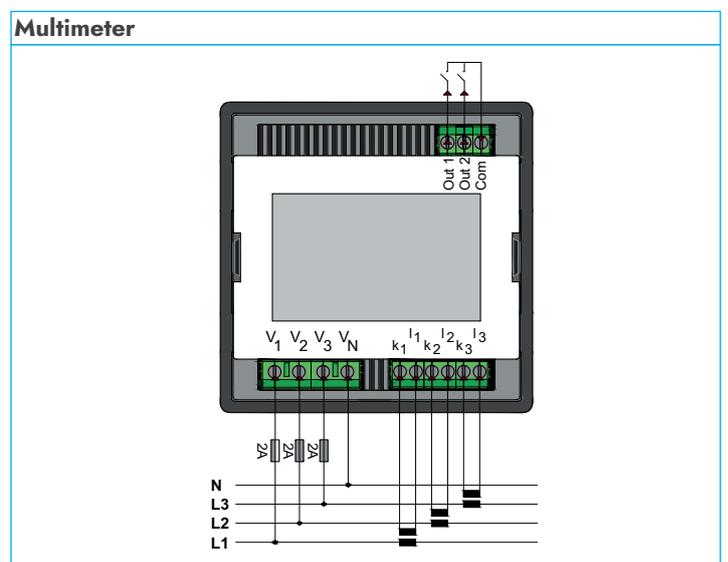

Key Features

- It is microprocessor based.
- **Measurement:** It can measure the phase-neutral voltage of one phase.
- **Output:** It has 1 piece 5 A relay output optionally.
- **Operating Voltage:** 85-265 V AC
- **Operarelaying Frequency:** 45-65 Hz
- **Power Consumption:** Less than 7 VA in set model and less than 5 VA in normal model.
- **Power Consumption of Measurement Inputs:** <1 VA


- **Voltage Measurement Range Phase-Neutral:** 10-280 V AC, 45-65 Hz
- **Measurement Accuracy:** 1%
- **Protection Class:** IP20
- **Screen:** There is 1 piece, 4-digit 7-segment display.
- **Operating Ambient Temperature:** -10 °C - +55 °C




Technical Features

| Product Code | Product Name | Product Description | Measuring Range 0-265V AC | Panel Type | Screen | Screen Digit | 85-265 V AC | 1 Phase Measurement | Set |
|--------------|--------------|---------------------|------------------------------|------------|--------|--------------|----------------|------------------------|-----|
| GA4311 | VTM 11 | VOLTMETER | ✓ | ✓ | 1 | 4 | ✓ | ✓ | |
| GA4312 | VTM 12 | SET VOLTMETER | ✓ | ✓ | 1 | 4 | ✓ | ✓ | ✓ |

Technical Drawing

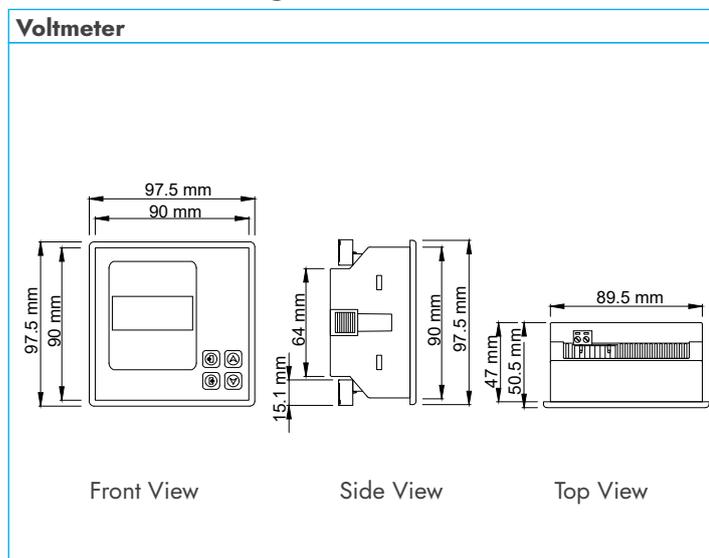

Connection Diagram

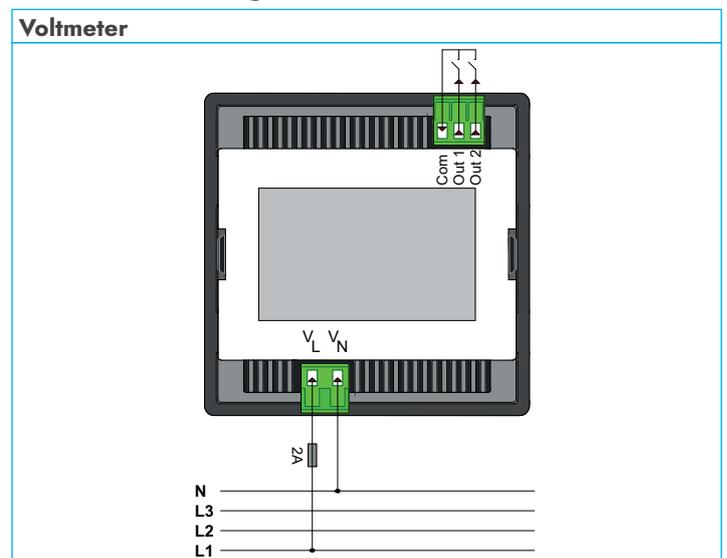

Key Features

- It is microprocessor based.
- **Current Transformer Ratio:** Adjustable between 5/5 and 10000/5
- **Output:** Optionally has 1 piece 5 A relay output.
- **Compatibility:** Optionally compatible with CT30 type current transformer.
- **Operating Voltage:** 85-265 V AC
- **Operating Frequency:** 45-65 Hz
- **Power Consumption of Measurement Inputs:** <1 VA
- **Minimum Measurement Values:** 25mA
- **Measurement Accuracy:** 1%


- **Protection Class:** IP20
- **Screen:** There is 1 piece, 4 digits 7-segment display.
- **Operating Ambient Temperature:** -10 °C - +55°C
- **Measurement:** It can measure the current of one phase.
- **Power Consumption:** Less than 7 VA in relay output model and less than 5 VA in normal model.
- Separate input current limit values can be entered for X/5 A and CT 30 type current transformers.




Technical Features

| Product Code | Product Name | Product Description | CT30 | X/5 A | Panel Type | Screen | Screen Digit | 85-265 V AC | 1 Phase Measurement | Set |
|--------------|--------------|-----------------------|------|-------|------------|--------|--------------|-------------|---------------------|-----|
| GA4411 | APM 11 | AMMETER | | ✓ | ✓ | 1 | 4 | ✓ | ✓ | |
| GA4412 | APM 12 | AMMETER (CT30 AT) | ✓ | | ✓ | 1 | 4 | ✓ | ✓ | |
| GA4413 | APM 13 | SET AMMETER | | ✓ | ✓ | 1 | 4 | ✓ | ✓ | ✓ |
| GA4414 | APM 14 | SET AMMETER (CT30 AT) | ✓ | | ✓ | 1 | 4 | ✓ | ✓ | ✓ |

Technical Drawing

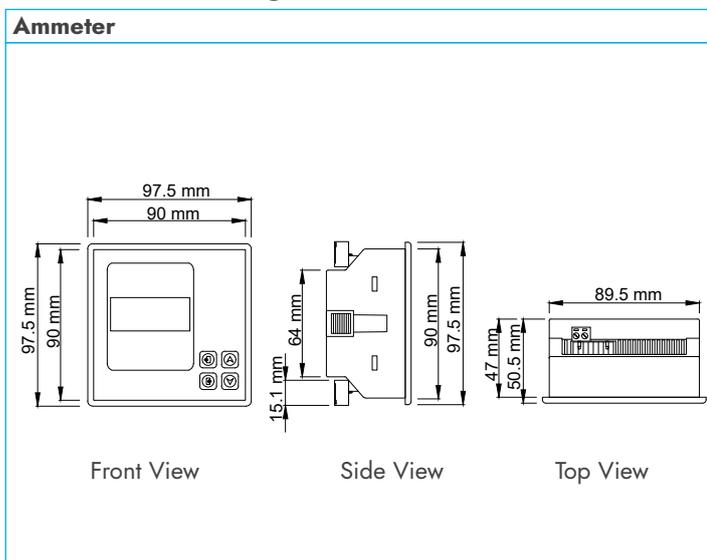

Connection Diagram

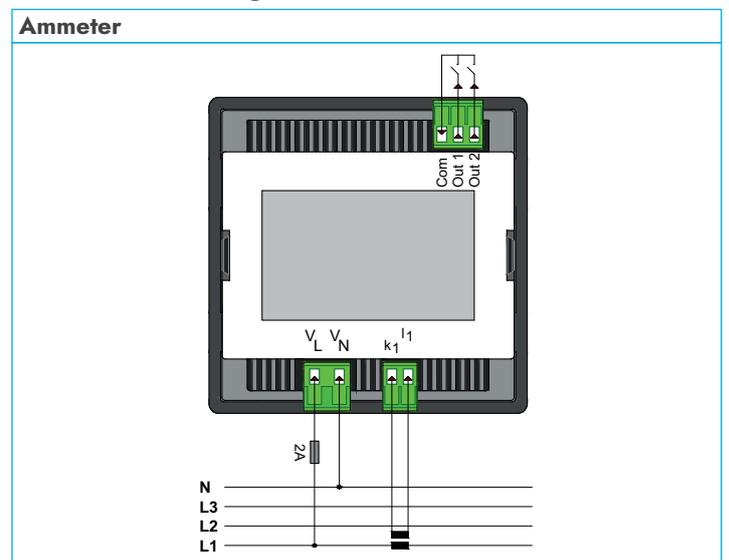

Technical Features

| Product Code | Product Name | Product Description | Hole size | VA | Primary Current (A) | Secondary Akim (A) |
|--------------|--------------|---------------------------------------|-----------|------|---------------------|--------------------|
| GA6911 | OAT 11 | OG TOROID CURRENT TRANSFORMER (40/1) | 68 mm | 1,25 | 40 | 1 |
| GA6912 | OAT 12 | OG TOROID CURRENT TRANSFORMER (100/5) | 68 mm | 5 | 100 | 5 |


It is only used together with our MV-referenced power factor controllers. It is definitely not connected to MV busbars, it is connected to XLPE cables. 40/1 up to 2500kVA; 100/5 XLPE cable type current transformer between 2500-6000kVA is used. please ask a price for special transformers such as 200/5 and 300/5.



OAT 11


Technical Drawing

XLPE Cable Type Current Transformer

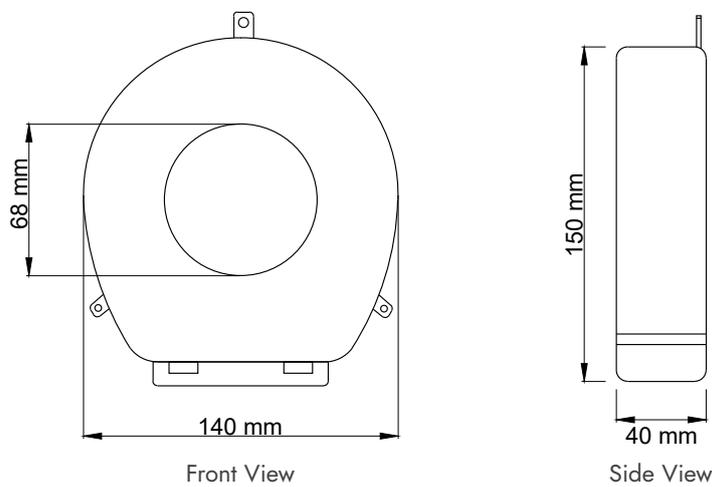


Connection Diagram

XLPE Cable Type Current Transformer Connection Type

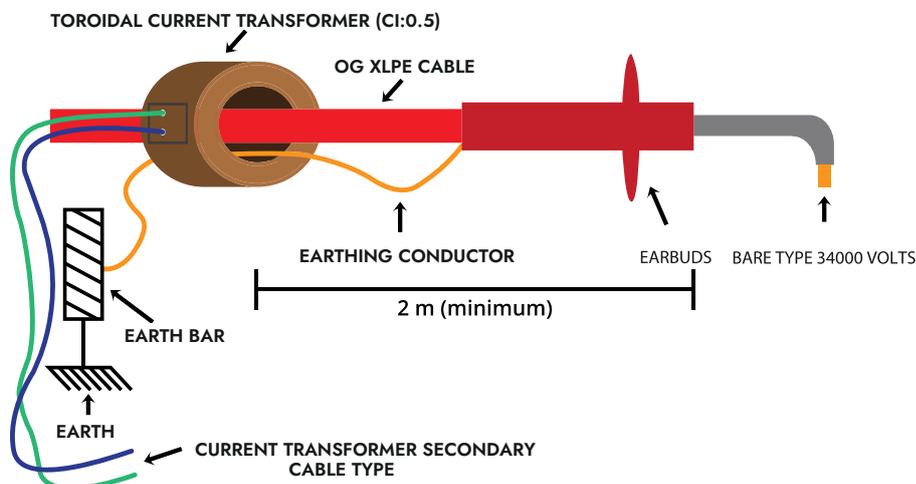

WARNING: The input phases of the driver and power factor controllers must be in the same order. In other words, L1 phase of the power factor controller and L1 phase of the driver, L2 phase of the power factor controller and L2 phase of the driver, L3 phase of the power factor controller and L3 phase of the driver must be the same. The driver must be controlled with TRG1-2-3

Connection Types Between Current Transformer and Earthing Cables

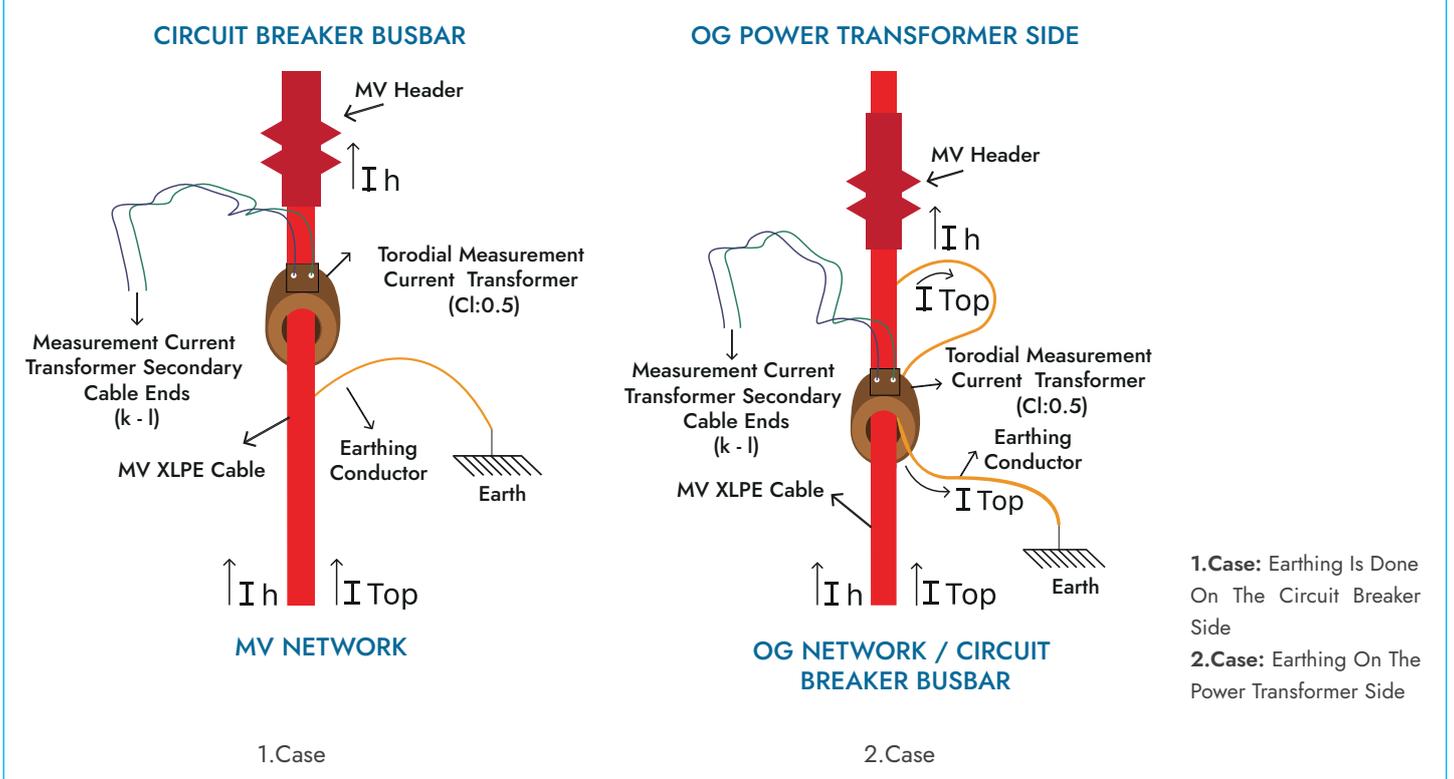

Cross Sections of Cables for XLPE Cable Type Current Transformers (mm²)

The selection of current transformers that can be used according to the power capacities for SVC MV power factor controllers and cable cross-section - length dimensions are as in the table. (The cross-section values in the table are based on 34.5 kV voltage value).

| Current Transformer | Transformer Power (kVA) | Distance Between Current Transformer and Power Factor Controller (m) | | | | |
|---------------------|-------------------------|--|-----|-----|----|-----|
| | | 20 | 40 | 60 | 80 | 100 |
| 40/1 | 630 | 2,5 | 2,5 | 2,5 | 4 | 4 |
| | 1000 | 2,5 | 2,5 | 4 | 4 | 4 |
| | 1250 | 2,5 | 4 | 4 | 6 | 6 |
| | 1600 | 2,5 | 4 | 6 | 6 | 10 |
| | 2000 | 4 | 6 | 6 | 10 | 10 |
| | 2500 | 4 | 6 | 10 | 10 | 10 |
| 100/5 | 630 | 2,5 | 2,5 | 2,5 | 4 | 4 |
| | 1000 | 2,5 | 2,5 | 4 | 4 | 4 |
| | 1250 | 2,5 | 4 | 4 | 6 | 6 |
| | 1600 | 2,5 | 4 | 6 | 6 | 10 |
| | 2000 | 4 | 6 | 6 | 10 | 10 |
| | 2500 | 4 | 6 | 10 | 10 | 10 |

Technical Features

GA.30S LV Current Transformers (Mini)

| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | | Rated Power (VA) | Class |
|---------------|---|-----------------|-----------------|-----------------|------------------|-------|
| GA.30S | 75/5 GA6001 | 100/5 GA6002 | 125/5 GA6003 | 150/5 GA6004 | 1,5 | 1 |
| | 200/5 GA6005 | | | | 2,5 | 1 |
| | 250/5 GA6006 | 300/5 GA6007 | 400/5 GA6008 | 600/5 GA6009 | 5 | 0,5 |



GA.30S

GA.30M LV Current Transformers (Mini)


| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | | | | Sealed | Rated Power (VA) | Class |
|---------------------|---|-----------------|-------------------------|-----------------|-----------------|----------------|--------|------------------|-------|
| GA.30M (30 x 10) | 30/5 GA6101 | 40/5 GA6102 | 50/5 GA6103 | 60/5 GA6104 | 75/5 GA6105 | 80/5 GA6106 | | 1,5 | 1 |
| | 100/5 GA6107 | 125/5 GA6108 | | | | | | 1,5 | 0,5 |
| | 100/5 GA6109 | 125/5 GA6110 | | | | | | 2,5 | 1 |
| | 150/5 GA6111 | 200/5 GA6112 | | | | | | 2,5 | 0,5 |
| | 250/5 GA6113 | 300/5 GA6114 | 400/5 GA6115 | 500/5 GA6116 | 600/5 GA6117 | | | 5 | 0,5 |
| | 300/5 GA6118 | 400/5 GA6119 | 500/5 GA6120 | 600/5 GA6121 | | | | 10 | 0,5 |
| | 300/5 GA6122 | 400/5 GA6123 | 500/5 GA6124 | 600/5 GA6125 | | | ✓ | 10 | 0,5 |
| | 100/5 GA6126 | | | | | | ✓ | 1,5 | 0,5 |
| | 150/5 GA6127 | | | | | | ✓ | 2,5 | 0,5 |
| | GA6151 | AT RAY | Rail Mounting Apparatus | | | | | | |




GA.30M

Technical Drawing

GA.30S LV Current Transformers (Mini)

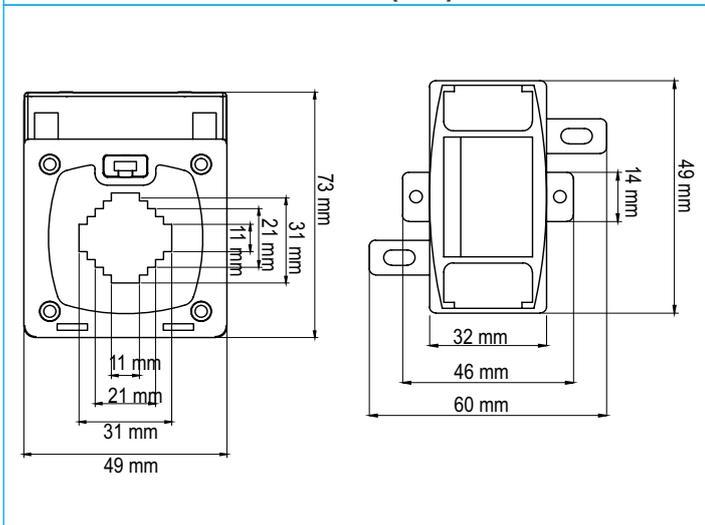

GA.30M LV Current Transformers (Mini)

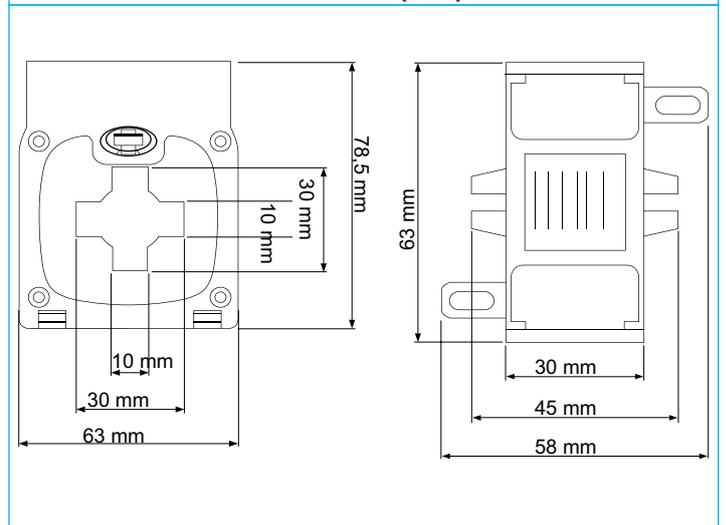

Technical Features

| GA.B LV Current Transformers (Busbar) | | | | | | | | | | | |
|---------------------------------------|---|----------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------|------------------|-------|
| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | | | | | | Sealed | Rated Power (VA) | Class |
| GA.B (Barali) | 5/5 GA6201 | 10/5 GA6202 | 15/5 GA6203 | 20/5 GA6204 | 25/5 GA6205 | 30/5 GA6206 | 40/5 GA6207 | 50/5 GA6208 | | 5 | 0,5 |
| | 60/5 GA6209 | 75/5 GA6210 | 80/5 GA6211 | 100/5 GA6212 | 125/5 GA6213 | 150/5 GA6214 | | | | 5 | 0,5 |
| | 5/5 GA6215 | 10/5 GA6216 | 15/5 GA6217 | 20/5 GA6218 | 25/5 GA6219 | 30/5 GA6220 | 40/5 GA6221 | 50/5 GA6222 | | 10 | 0,5 |
| | 60/5 GA6223 | 75/5 GA6224 | 80/5 GA6225 | 100/5 GA6226 | 125/5 GA6227 | 150/5 GA6228 | | | | 10 | 0,5 |
| | 30/5 GA6229 | 40/5 GA6230 | 50/5 GA6231 | 60/5 GA6232 | 75/5 GA6233 | 80/5 GA6234 | 100/5 GA6235 | 125/5 GA6236 | ✓ | 10 | 0,5 |
| | 150/5 GA6237 | | | | | | | | ✓ | 10 | 0,5 |



GA.B AG



Technical Features

| GA.30 LV Current Transformers | | | | | | | | | | | |
|-------------------------------|---|-----------------|-----------------|----------------|----------------|----------------|----------------|----------------|--------|------------------|-------|
| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | | | | | | Sealed | Rated Power (VA) | Class |
| GA.30 (30 x 10) | 20/5 GA6301 | 25/5 GA6302 | 30/5 GA6303 | 40/5 GA6304 | 50/5 GA6305 | 60/5 GA6306 | 75/5 GA6307 | 80/5 GA6308 | | 5 | 1 |
| | 100/5 GA6309 | 125/5 GA6310 | 150/5 GA6311 | | | | | | | 5 | 1 |
| | 250/5 GA6312 | 300/5 GA6313 | | | | | | | | 5 | 0,5 |
| | 250/5 GA6314 | 300/5 GA6315 | | | | | | | | 10 | 0,5 |
| | 250/5 GA6316 | 300/5 GA6317 | | | | | | | ✓ | 10 | 0,5 |



GA.30

Technical Drawing

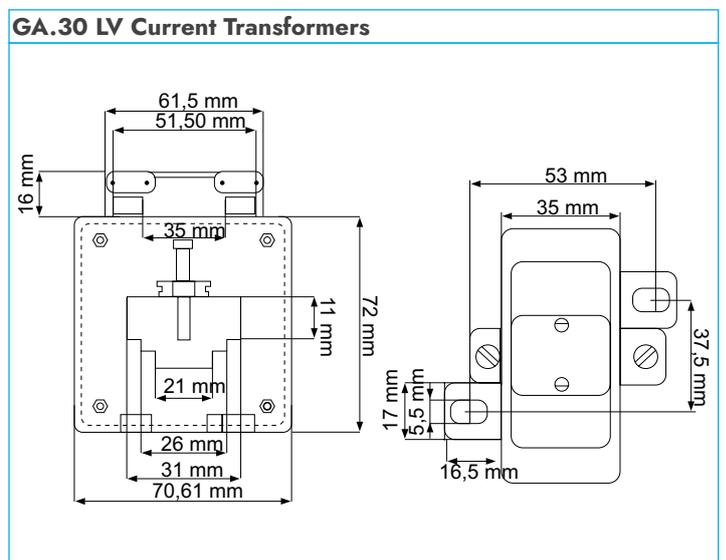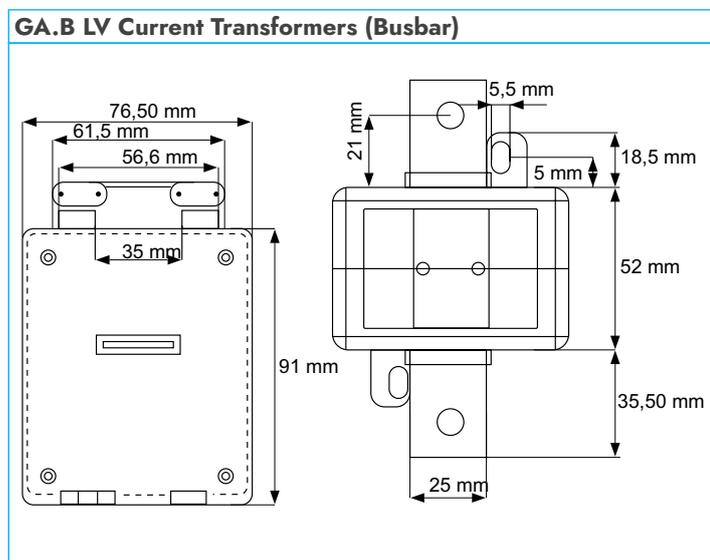

Technical Features

| GA.30D LV Current Transformers | | | | | | |
|--------------------------------|---|--|--|--------|------------------|-------|
| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | Sealed | Rated Power (VA) | Class |
| GA.30D (30 x 10) | 200/5 GA6318 | | | | 5 | 0,5 |
| | 200/5 GA6319 | | | | 10 | 0,5 |
| | 200/5 GA6320 | | | ✓ | 10 | 0,5 |





GA.30D

| GA.40 LV Current Transformers | | | | | | | |
|-------------------------------|---|-----------------|-----------------|-----------------|--------|------------------|-------|
| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | | Sealed | Rated Power (VA) | Class |
| GA.40 (40 x 10) | 300/5 GA6401 | 400/5 GA6402 | 500/5 GA6403 | 600/5 GA6404 | | 5 | 0,5 |
| | 300/5 GA6405 | 400/5 GA6406 | 500/5 GA6407 | 600/5 GA6408 | | 10 | 0,5 |
| | 400/5 GA6409 | 500/5 GA6410 | 600/5 GA6411 | | ✓ | 10 | 0,5 |



GA.40

Technical Drawing

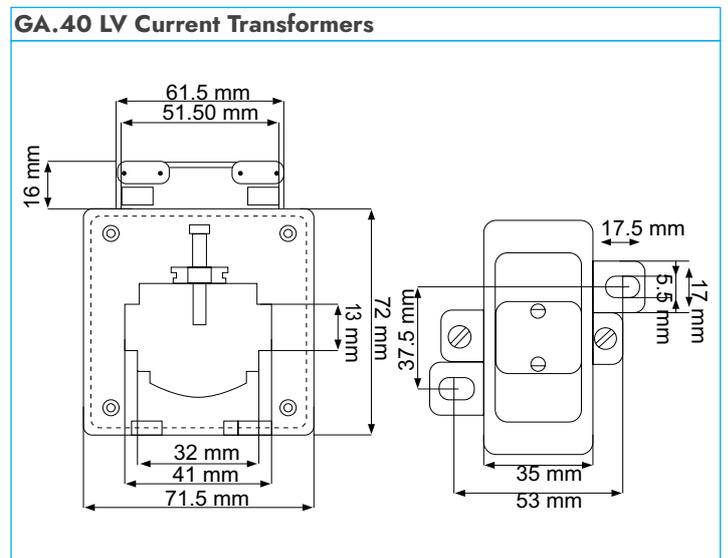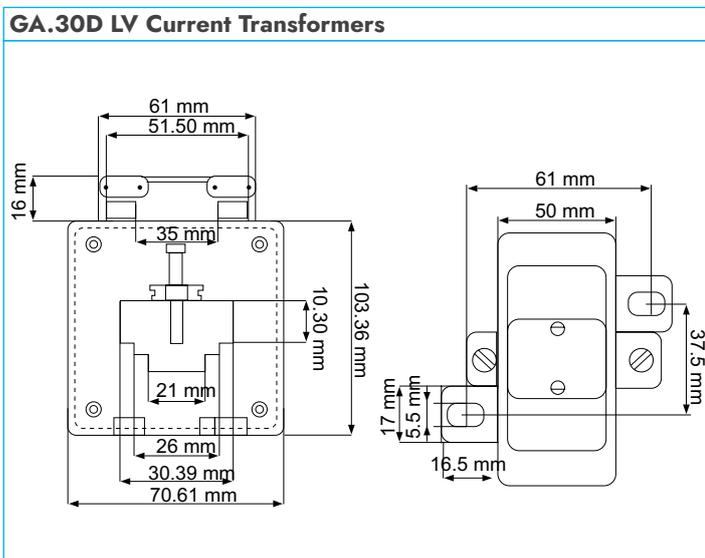

Technical Features

| GA.60 LV Current Transformers | | | | | | | | | |
|-------------------------------|---|-----------------|------------------|------------------|------------------|------------------|--------|------------------|-------|
| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | | | | Sealed | Rated Power (VA) | Class |
| GA.60 (60 x 10) | 700/5 GA6500 | 750/5 GA6501 | 800/5 GA6502 | 1000/5 GA6503 | 1200/5 GA6504 | 1250/5 GA6505 | | 10 | 0,5 |
| | 750/5 GA6506 | 800/5 GA6507 | 1000/5 GA6508 | 1200/5 GA6509 | 1250/5 GA6510 | | | 15 | 0,5 |
| | 700/5 GA6511 | 750/5 GA6512 | 800/5 GA6513 | 1000/5 GA6514 | 1200/5 GA6515 | 1250/5 GA6516 | ✓ | 10 | 0,5 |





GA.60

| GA.60DAR LV Current Transformers | | | | | | |
|----------------------------------|---|------------------|------------------|------------------|------------------|-------|
| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | | Rated Power (VA) | Class |
| GA.60 DAR | 400/5 GA6517 | 600/5 GA6518 | 750/5 GA6519 | 1000/5 GA6520 | 10 | 0,5 |
| | 1250/5 GA6521 | 1600/5 GA6522 | 2000/5 GA6523 | | 15 | 0,5 |



GA.60DAR

Technical Drawing

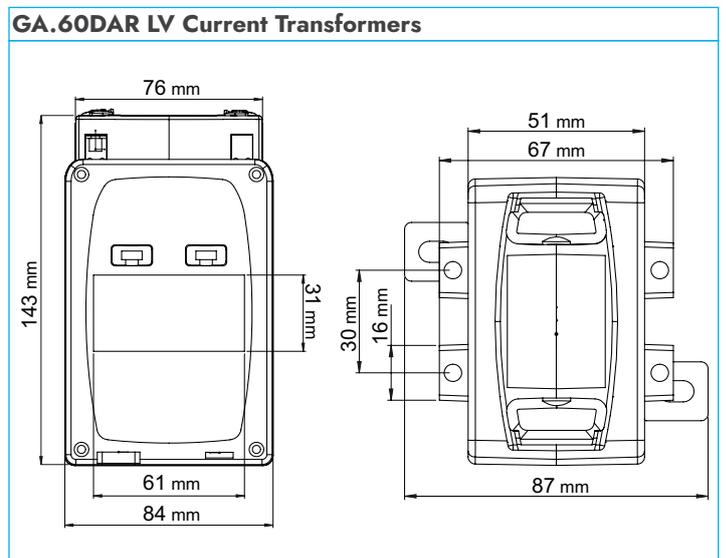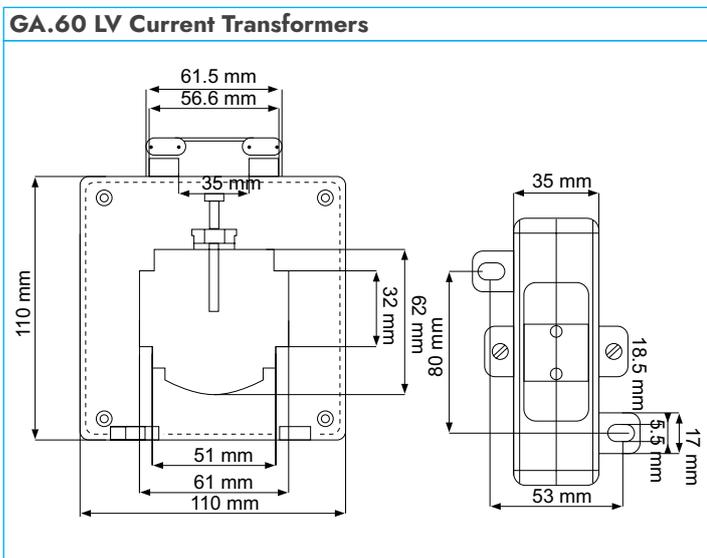

Technical Features

GA.80 LV Current Transformers

| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | Sealed | Rated Power (VA) | Class |
|--------------------|---|------------------|--------|------------------|-------|
| GA.80 (80 x 10) | 1500/5 GA6601 | 1600/5 GA6602 | | 15 | 0,5 |
| | 1500/5 GA6603 | 1600/5 GA6604 | | 30 | 0,5 |
| | 1500/5 GA6605 | 1600/5 GA6606 | ✓ | 15 | 0,5 |



GA.80

GA.100 LV Current Transformers


| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | | | Sealed | Rated Power (VA) | Class |
|----------------------|---|------------------|------------------|------------------|------------------|------------------|------------------|-------|
| GA.100 (100 x 10) | 2000/5 GA6701 | 2500/5 GA6702 | 3000/5 GA6703 | 3200/5 GA6704 | | | 15 | 0,5 |
| | 2000/5 GA6705 | 2500/5 GA6706 | 3000/5 GA6707 | 3200/5 GA6708 | 4000/5 GA6709 | 5000/5 GA6710 | 30 | 0,5 |
| | 2000/5 GA6711 | 2500/5 GA6712 | 3000/5 GA6713 | 3200/5 GA6714 | | | 15 | 0,5 |
| | 4000/5 GA6715 | | | | | | 30 | 0,5 |




GA.100

Technical Features

GA.80 LV Current Transformers

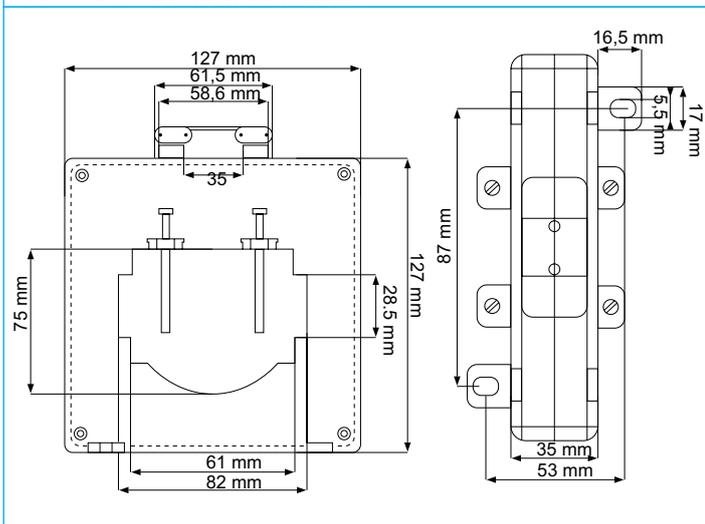

GA.100 LV Current Transformers

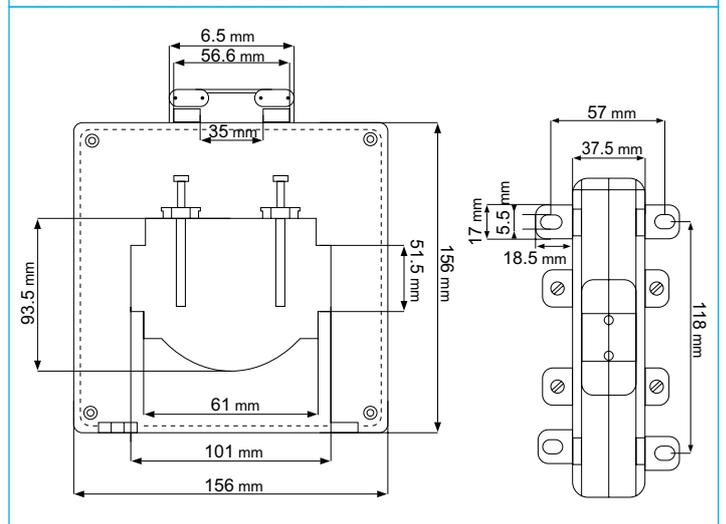

Technical Features

GA.100DAR LV Current Transformers

| Product Model | Primary Current (A) / Secondary Current (A) Product Code | | | | | Rated Power (VA) | Class |
|---------------|---|------------------|------------------|------------------|------------------|------------------|-------|
| GA.100 DAR | 1000/5 GA6716 | 1250/5 GA6717 | | | | 10 | 0,5 |
| | 1600/5 GA6718 | 2000/5 GA6719 | 2500/5 GA6720 | 3000/5 GA6721 | 3200/5 GA6722 | 15 | 0,5 |
| | 4000/5 GA6723 | | | | | 30 | 0,5 |



GA.100DAR

CT 30 Current Transformers


| Product Code | Product Name | Product Description |
|--------------|--------------|----------------------------------|
| GA6921 | AT CT30 | CT30 (120 A) CURRENT TRANSFORMER |




AT CT30

Technical Drawing

GA.100DAR LV Current Transformers

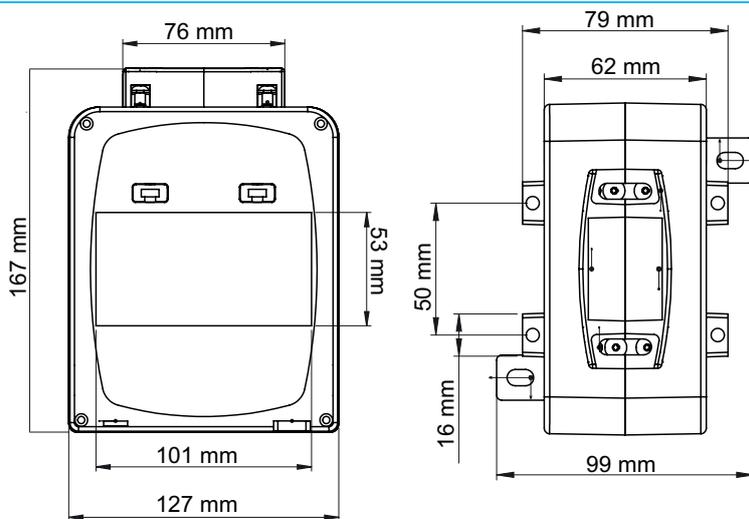

CT 30 Current Transformers

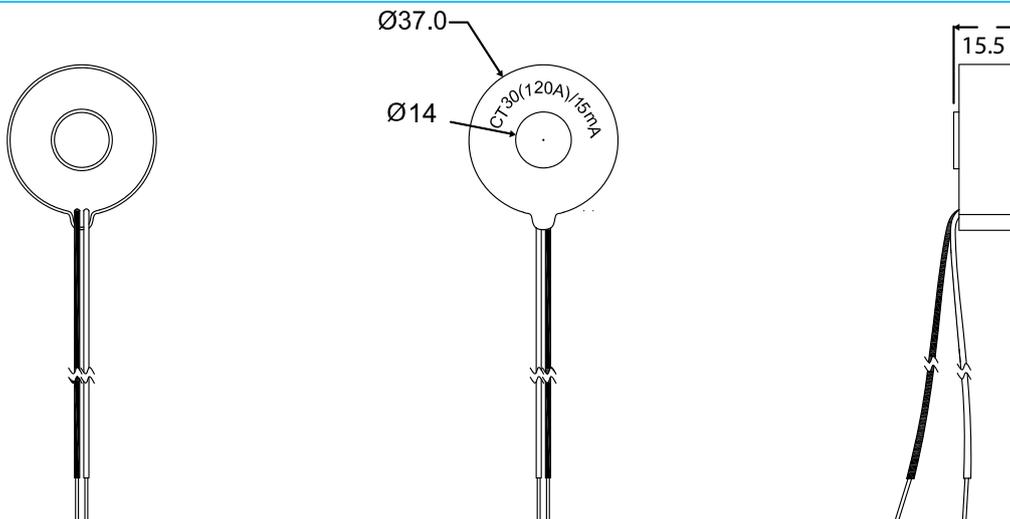





ENERGY MANAGEMENT AND AUTOMATION

It is a web-based system that is designed to monitor the energy consumption of enterprises and to remotely manage the devices that are suitable for the structure, and its content is growing and developing day by day.

SmartPOWER® energy management systems use GPRS or Ethernet communication infrastructure to communicate and control energy-consuming machines with auxiliary elements. According to the defined rules, the operation of the devices can be intervened. **SmartPOWER®** energy management systems can be used online via www.enerjitakibi.com web address or server software installed on the enterprise's own server, or they can be operated with software that is installed on local computers.

How does the system work?

The device that is desired to be monitored and controlled is connected to the appropriate GSM, GSM AUTOMATION and ETHERNET terminals and the data is sent to the central server. The user does not need to install any program. With any device connected to the Internet (such as a computer, smartphone, tablet), the user can enter their username (their own e-mail address) and password to www.enerjitakibi.com and view the devices defined in their account on the screen. Thanks to user authorization levels, the same enterprise can be monitored by different people with different authorization levels. If you want to control the machines, this is made possible by using input and output modules and sensors.

| | |
|------------------------------------|----|
| GSM and 4G Communication Terminals | 68 |
| Ethernet Terminals | 70 |
| GSM and 4G Automation Terminals | 72 |
| Additional Connection Products | 74 |
| Monitoring Software | 75 |
| Automation Modules | 82 |

Key Features

- It is microprocessor based.
- **Supply:** HT G13 GSM Terminal and HT G16 4G Terminal works with 85-265 V AC and 9-24 V DC supply. HT G11, HT G14 GSM Terminal and HT G17 4G Terminal works with 85-265 V AC supply. HT G12 GSM Terminal is powered by 10-30 V DC supply works.
- **Communication Channel:** RS-485, RS-232 and optical supports port communication channels.
- **Modbus Device Quantity:** 32 meters or 247 Modbus devices can be read via RS-485. One meter can be read via optical reader and RS-232
- **Protocol:** TS EN 62056-21 protocol. It can communicate with all meters that support it.

- **System Architecture:** It has a system architecture that does not require static IP
- **LEDStatus:** RS-485/Optical/RS-232 (Communication), GSM connection and internet status LEDs.
- **Data Sending Period:** It can be adjusted between 1 minute and 240 minutes.
- **Compatibility:** It has wired GSM antenna support for places where GSM network signal is weak.
- **GSM Operator Compatibility:** It works compatible with M2M data lines of all GSM operators.
- **Operating Ambient Temperature:** It can operate at ambient temperatures between -10 °C and +55 °C
- **Supply Consumption Power:** <1 VA.
- **Protection Class:** It has IP40 protection class.




HT G16

Technical Features

| Product Code | Product Name | Product Description | Communication | Supply | Protocol* |
|--------------|--------------|--------------------------------|---------------|-----------------------|--------------|
| GA3111 | HT G11 | GSM TERMINAL (METER/MODBUS) | 2G | 85-265 V AC | Meter/Modbus |
| GA3112 | HT G12 | GSM TERMINAL (METER/MODBUS)-DC | 2G | 10-30 V DC | Meter/Modbus |
| GA3113 | HT G13 | GSM TERMINAL - AC/DC | 2G | 85-265 V AC/9-24 V DC | Meter/Modbus |
| GA3114 | HT G14 | GSM TERMINAL - AC | 2G | 85-265 V AC | Meter/Modbus |
| GA3116 | HT G16 | 4G TERMINAL - AC/DC | 4G | 85-265 V AC/9-24 V DC | Meter/Modbus |
| GA3117 | HT G17 | 4G TERMINAL - AC | 4G | 85-265 V AC | Meter/Modbus |

*A maximum of 32 devices can be read in the meter protocol and 247 devices can be read in the Modbus protocol.

Technical Drawing

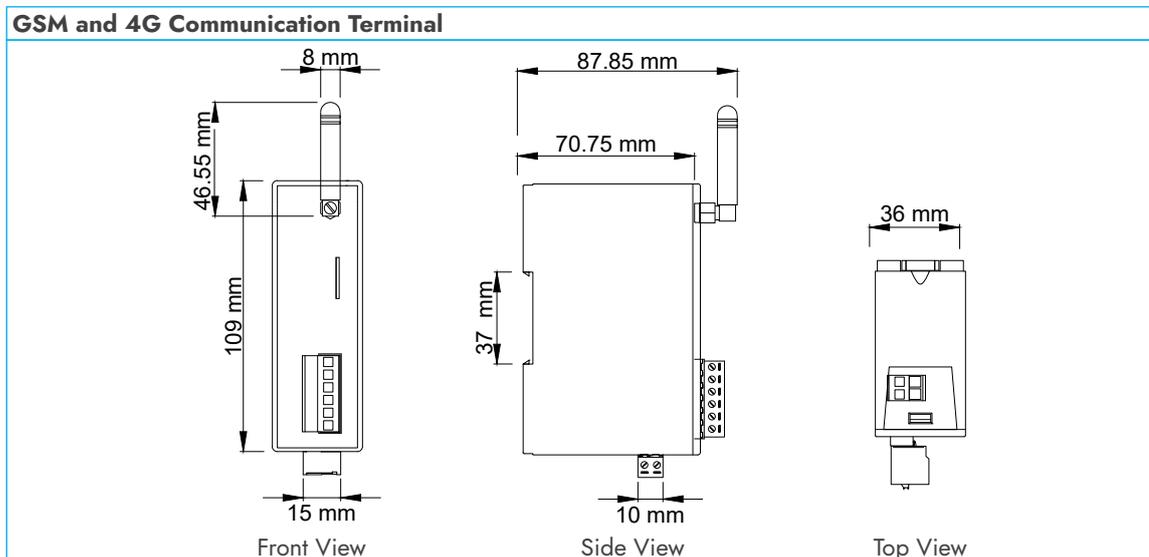


Connection Diagram


GSM and 4G Communication - Modbus (RS-485)



GSM and 4G Communication - Meter (RS-485)

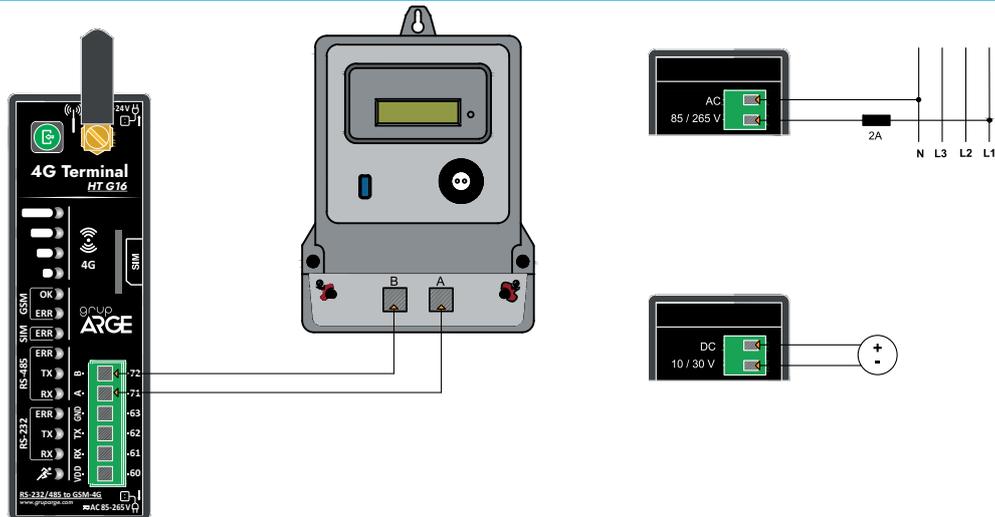

GSM and 4G Communication - Meter (Optical Reader)

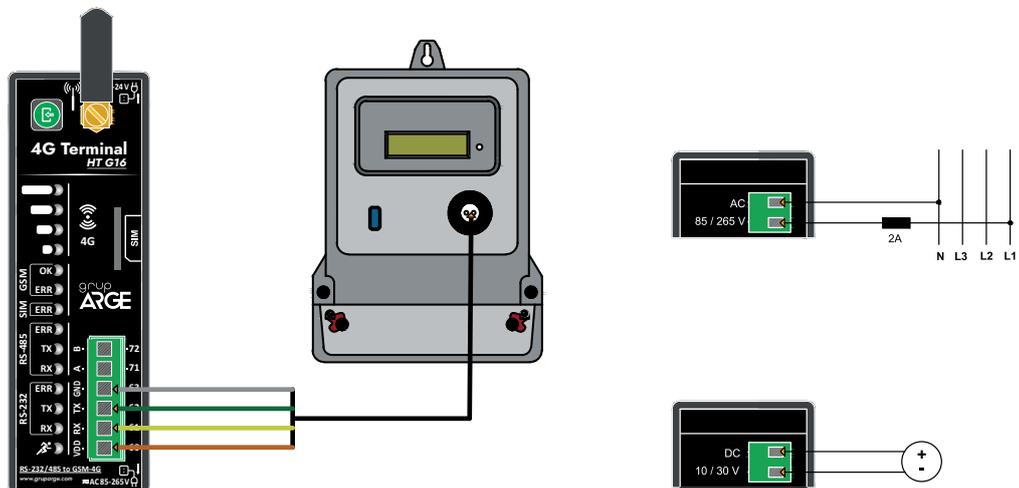

Key Features

- **Compatibility:** RS-485 Standard Modbus RTU protocol supports RS-232 and optical port communication channels.
- **Protocol:** It can communicate with devices that support Modbus RTU and Modbus ASCII protocols. It can communicate with all meters that support TS EN 62056-21 protocol.
- **Modbus Device Quantity:** 32 meters or 247 Modbus devices can be read via RS-485. One meter can be read via optical reader and RS-232.
- It is microprocessor based.
- It has RS-485, RS-232 and optical communication ports.
- **Supply:** HT E21/E23 operates with 85-265 V AC supply. HT E22 works with 10-30 V DC supply.

- **LED Status:** It has LEDs indicating USB, Power, RS-485-Optical (Communication), IP and internet status.
- **Data Sending Period:** It can be adjusted between 1-240 minutes.
- **System Architecture:** It has a system architecture that does not require static IP. In cases where static IP is mandatory, the necessary settings can be made via the USB port on it.
- **Ambient Temperature:** It can operate at ambient temperatures between -10 °C and +60 °C
- **Supply Consumption Power:** <1 VA
- **Protection Class:** IP40 protection class.



HT E21


Technical Features

| Product Code | Product Name | Product Description | Communication | Supply | Protokol* |
|--------------|--------------|-------------------------------------|---------------|-------------|---------------|
| GA3103 | HT E21 | ETHERNET TERMINAL (METER/MODBUS) | Ethernet | 85-265 V AC | Meter/Modbus |
| GA3104 | HT E22 | ETHERNET TERMINAL (METER/MODBUS)-DC | Ethernet | 10-30 V DC | Meter/Modbus |
| GA3105 | HT E23 | ETHERNET-SERIAL GATEWAY - AC | Ethernet | 85-265 V AC | Transparent** |

*A maximum of 32 devices can be read in the meter protocol and 247 devices can be read in the Modbus protocol.


**HT E23 coded gateway product is not compatible with enerjitakibi.com platform.

Technical Drawing

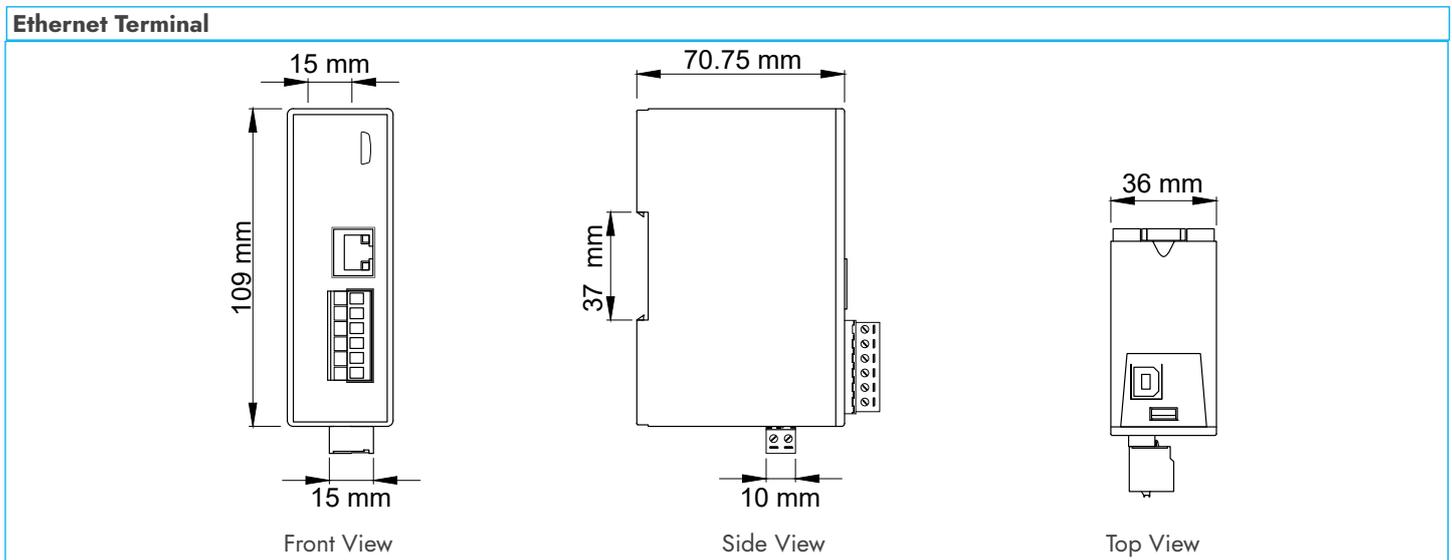


Connection Diagram


Ethernet Terminal - Power Factor Controller

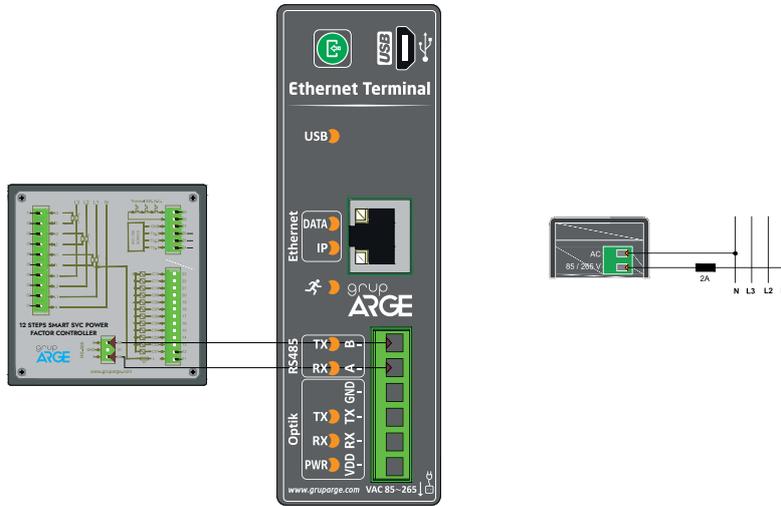

Ethernet Terminal - Meter (RS-485)

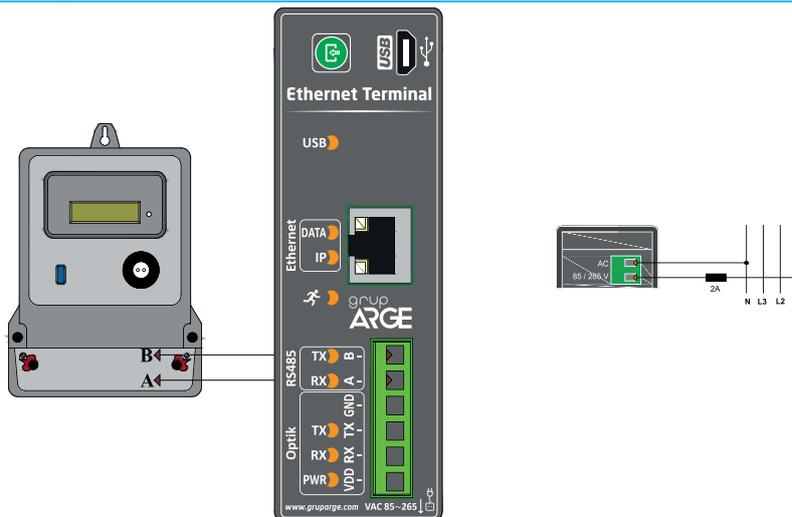

Ethernet Terminal - Meter Optical Reader

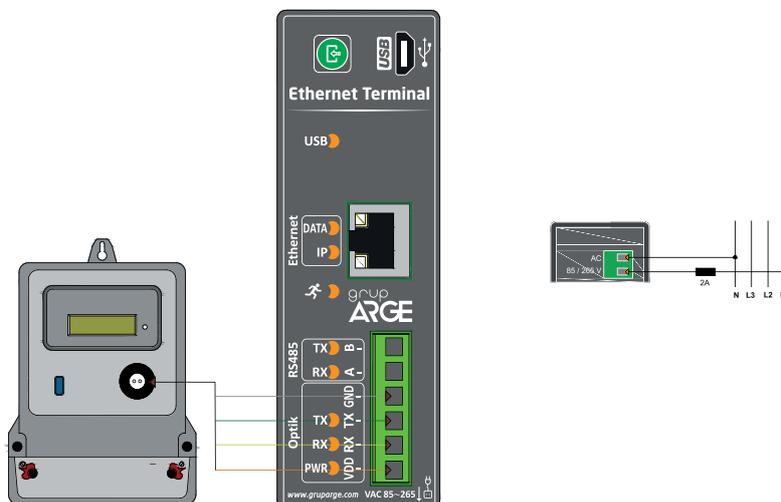

Key Features

- **Power Supply:** The supply range for HT G21/ G22/G24/G25 models with AC power supply is 85-265 V with DC supply capability. In the HT G23/ G26 models, the supply range is 9-24 V
- **Notification:** HT G21/G22/G24/G25 models detects a power outage and reports it to the center. (HT G23/G26 models do not have this feature.)
- **Communication Channel:** RS-485, RS-232 and optical supports port communication channels.
- **Modbus Device Quantity:** 32 meters or 247 Modbus devices can be read via RS-485. One meter can be read via optical reader and RS-232
- **Protocol:** It can communicate with all meters that support TS EN 62056-21 protocol.
- **Supply Consumption Power:** <1 VA
- It is microprocessor based.

- **LED Status:** It has LEDs that show RS-485/ Optical/RS-232 (Communication), Out, In, GSM connection and internet statuses.
- **Data Sending Period:** It can be set between 1-240 minutes.
- **System Architecture:** It has a system architecture that does not require static IP
- **Output:** There are 2 units of dry contact monitoring inputs and 2 units of 5 A relay outputs
- **Compatibility:** It has wired GSM antenna support for places where GSM network signal is weak.
- **GSM Operator Compatibility:** Compatible with M2M data lines of all GSM operators.
- **Ambient Temperature:** It can operate at ambient temperatures between -10 °C and +60 °C
- **Protection Class:** IP40 protection class.



HT G26


Technical Features

| Product Code | Product Name | Product Description | Communication | Supply | Protocol* | Input/Output |
|--------------|--------------|--------------------------------------|---------------|-------------|-----------|--------------|
| GA3121 | HT G21 | GSM AUTOMATION TERMINAL (METER) | 2G | 85-265 V AC | Sayaç | 2/2 |
| GA3122 | HT G22 | GSM AUTOMATION TERMINAL (MODBUS) | 2G | 85-265 V AC | Modbus | 2/2 |
| GA3123 | HT G23 | GSM AUTOMATION TERMINAL (MODBUS)-DC | 2G | 9-24 V DC | Modbus | 2/2 |
| GA3124 | HT G24 | 4G AUTOMATION TERMINAL (METER) - AC | 4G | 85-265 V AC | Sayaç | 2/2 |
| GA3125 | HT G25 | 4G AUTOMATION TERMINAL (MODBUS) - AC | 4G | 85-265 V AC | Modbus | 2/2 |
| GA3126 | HT G26 | 4G AUTOMATION TERMINAL (MODBUS) - AC | 4G | 9-24 V DC | Modbus | 2/2 |

*A maximum of 32 devices can be read in the meter protocol and 247 devices can be read in the Modbus protocol.


- HT G21 - G22 terminals can be manufactured to include both AC and DC supplies upon request.

Technical Drawing

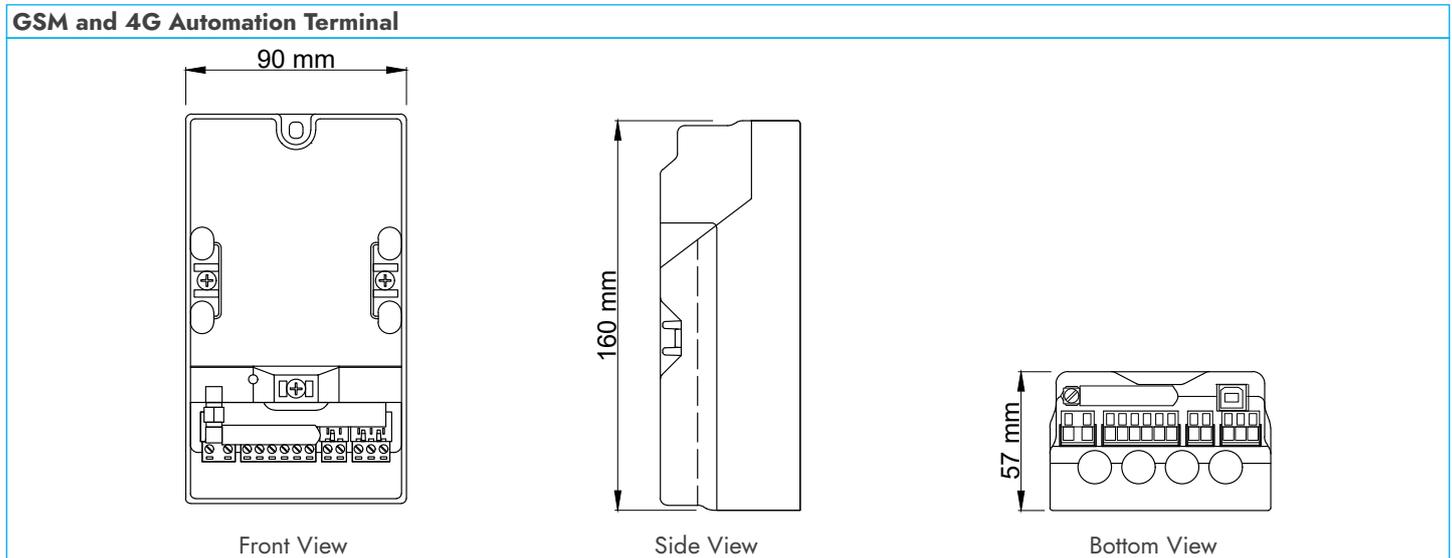


Connection Diagram


GSM and 4G Automation Terminal - Power Factor Controller

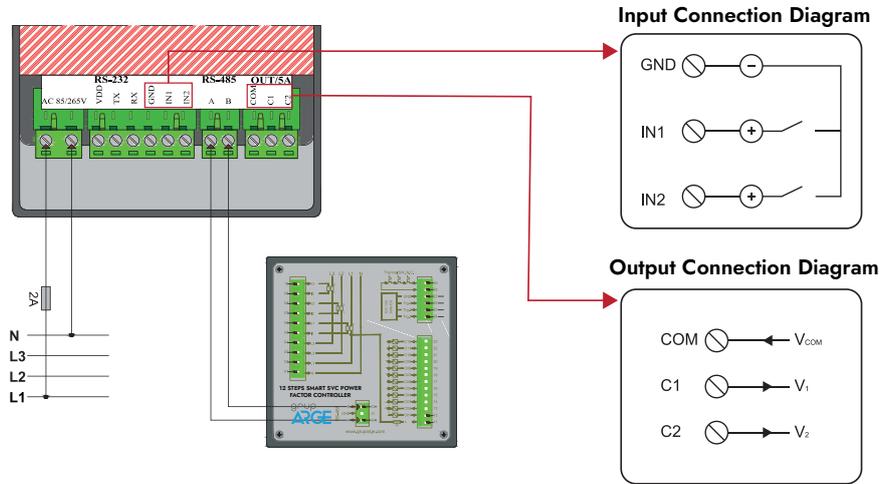

GSM and 4G Automation Terminal - Meter (RS-485)

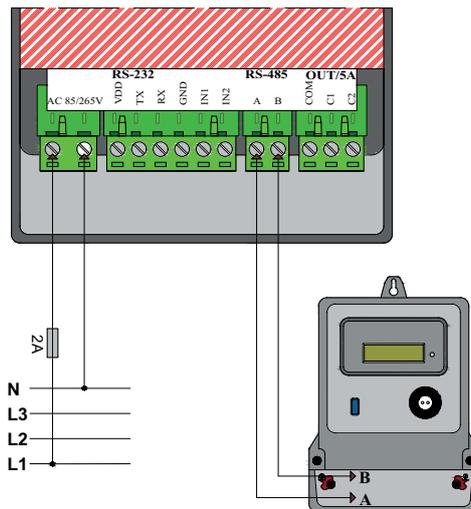

GSM and 4G Automation Terminal - Meter Optical Reader

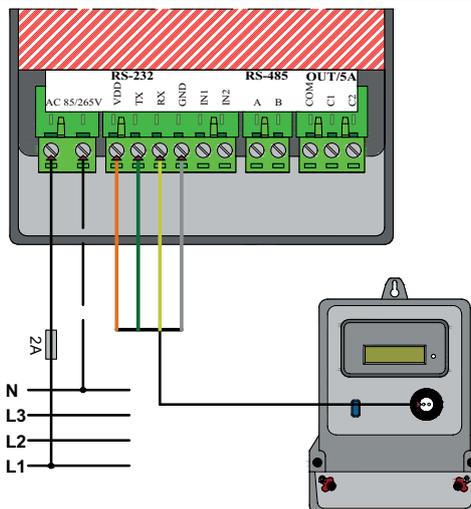

Optical Reader

It is designed to provide information exchange with electronic devices that communicate with the optical reader using IEC1107 (IEC62056-21) protocol. It is used for GPRS or Ethernet based modems used in communication with meters to read data from meters. The optical reader is attached to the metal surface in the optical eye of the electricity meter with the arrow mark on the label pointing upwards.

Key Features

- **Communication Protocol:** IEC1107 (IEC62056-21) RS-232.
- **Cable Cross Section and Length:** 4 x 0.22 mm², 2.2m
- **Operating Temperature:** 100 °C...+600 °C
- **Magnet:** Neodymium magnet.
- **Connection Type:** Terminal connection.
- **Weight:** 100 g (with cable).
- **Mounting:** Mounting on the metal surface at the optical port.
- **Protection Class:** IP20
- **Maximum Connection Speed:** 19200 bps



OPT 01

Technical Features

| Product Code | Product Name | Product Description |
|--------------|--------------|--------------------------------|
| GA3200 | OPT 00 | OPTICAL READER (PC Compatible) |
| GA3201 | OPT 01 | OPTICAL READER (Wired) |

Wired GSM Antenna

GSM antennas are high gain antennas used to increase the reception power and quality in environments where GSM signal strength is weak.

Technical Features

| Product Code | Product Name | Product Description |
|--------------|--------------|-------------------------------|
| GA3202 | ANT 03 | 3 M WIRED GSM ANTENNA (3 dBi) |
| GA3204 | ANT 07 | 7 M WIRED GSM ANTENNA (9 dBi) |



ANT 07



SmartPOWER® WEB is a web-based energy management system for energy data collection, consumption analysis and automation over the internet.

With RS-485, RS-232 or optical port connections, meters, power factor controllers, analyzers and many Modbus RTU communication devices can be connected to GPRS or Ethernet terminals. No configuration and static IP required. Installation is completed in minutes with Plug and Play feature.

The terminals transfer the data to a server via internet connection and store the data on the server. You can monitor your data instantly and control your devices from your phone, tablet or computer with internet connection without having to install programs from anywhere.

You can analyze the reactive ratios on the graph and perform many other operations such as detection of problems, phase failure, voltage drop / rise, deterioration of meter current transformers or remote control of your relay in real time.

You can follow up invoices by defining tariffs, report active / reactive consumption and print out in different formats. You will be notified by email and SMS by defining special alarms. With the flexible user authorization system, you can create and authorize downstream users.

It has a user-friendly interface. Visual graphically powered reports allow simple comparisons and analysis.

With the business view, you can create groups and subgroups to group your businesses to review and make comparisons among themselves.

With the contacts on the GSM AUTOMATION modem or using input/output modules, you can set time, temperature, define rules according to the input status or control the output with manual control.

SmartPOWER® Modules and Features

SmartPOWER® Energy Management System is a web-based system developed for the energy efficiency of the enterprise. Thanks to its modular structure, different efficiency applications can be performed separately or as a whole. Thus, electricity, water, natural gas consumption information and control of devices in enterprises are provided in a special way to the enterprise.

Compensation Management Module

- Remote monitoring and control of power factor controllers and analyzers of many brands and models can be made.
- Sending Remote Commands to Devices: All features supported by the device such as transformer test, step test, step status, instant current / voltage information and instant index reading can be controlled by remote command.

Electricity Meter Monitoring Module

- All index data received from the devices can be reported using the date filter. It can be exported in Excel database.
- **Invoice Page:** Taking into account all cost items in electricity bills, it allows creating an invoice in the closest way to the actual invoice format with tariff settings that can be customized by the user. It can be exported in PDF format.

Electricity Billing Module

- It is used for billing business and common consumption in buildings with common areas such as OSBs and shopping malls.
- Campus, block, floor, area, common area and office definitions can be made.
- Electricity consumption can be calculated using devices such as analyzers, meters, etc. with remote reading.

Device Control Module

- The 2 input/output and 8 input/output modules on the GSM modems can be monitored and controlled over the system.
- The outputs can be controlled manually or with daily/weekly schedules depending on the change status of the input information. It can also be controlled depending on the change status of another input information.
- With the Analog Monitoring Module, control can be provided according to the data received from analog sensors.

Generator Control Module

- The generator can be remotely sent Start/Stop/Auto/Reset commands.
- Information such as generator status, oil pressure, temperature, fuel level, battery voltage, total run time, number of restarts, time remaining until next maintenance, total energy produced, grid voltages (L1, L2, L3, L12, L23, L31) grid frequency, generator voltage (L1, L2, L3, L12, L23, L31), generator frequency, current drawn, active power, reactive power, engine rotation speed, etc. can be received.

Natural Gas Monitoring Module

- Data can be received via pulse cables that are connected to the mechanical natural gas meter.

- Invoice Page: It enables the creation of invoices in the closest way to the actual invoice format with tariff settings that can be customized by the user, taking into account all cost items in natural gas invoices.

Water Meter Monitoring Module

- With MODBUS communication module, index data can be received from meters.
- Indices and consumption can be reported graphically and tabularly.
- It can be printed in Excel, JPEG and PNG formats.

Invoice Tracking Module

- With MODBUS communication module, index data can be obtained from meters.
- Indices and consumption can be reported graphically and tabularly.
- Subscribers who are subject to reactive penalty or approaching the penalty limit can be reported.

Analog Monitoring Module

- It is used for collecting and reporting data from 4-20 mA and 0-10 V analog sensors.
- It can be reported graphically and tabularly.
- Output control can be made according to sensor data by using the Device Control Module.

Flow Measurement Module

- Flow rate can be measured by using a flow meter. Instant flow measurement can be made.
- Daily, monthly and yearly flow status or consumption history can be reported graphically for the past.
- It can be printed in Excel, JPEG and PNG formats.



IOS

You can download our SmartPOWER® mobile application from the App Store application store on iOS operating system.



ANDROID

You can download our SmartPOWER® mobile application from the Play Store app store on the Android operating system.

SmartPOWER® Web Operation



Feature Table

| Features | SmartPOWER® Web |
|-----------------------------|-----------------|
| WEB BASED | ✓ |
| INDEPENDENT ACCESS | ✓ |
| ARCHIVING | ✓ |
| ANALYZER | ✓ |
| POWER FACTOR CONTROLLER | ✓ |
| METER | ✓ |
| MODBUS RTU | ✓ |
| SYSTEM PARAMETERIZATION | ✓ |
| RTU | ✓ |
| USER AUTHORIZATION SERVICES | ✓ |
| REGION DEFINITION | ✓ |
| TARIFF CREATION | ✓ |
| BULK TABLE VIEW | ✓ |
| FRONT PANEL VIEW | ✓ |
| AUTOMATIC SCREEN UPDATE | ✓ |
| SEND COMMAND | ✓ |
| ALARM TYPES | ✓ |
| ALARM SUBSCRIPTION | ✓ |
| SMS / E-MAIL | ✓ |
| PERIODIC VALUES | ✓ |
| ENERGY | ✓ |
| CHARGING | ✓ |
| COMPENSATION | ✓ |
| IOT CONTROL | ✓ |
| SYSTEM LOGS | ✓ |
| DEVICE SETTINGS | ✓ |
| DATA OUTPUT (XLS, PDF, JPG) | ✓ |
| SELECT DATE AND TIME | ✓ |

Alarm Notifications

E-Mail

- Voltage Alarm
- Unbalanced Current Alarm
- Over 5 A Current Alarm
- Meter Phase Failure Alarm
- Energy Consumption Alarm
- Low Battery Alarm
- Trunk Lid Opened Alarm
- Terminal Block Cover
- Opened Alarm
- Current Alarm
- Import Demand Exceedance Alarm
- Export Demand Exceedance Alarm
- Indefinite Lighting Alarm
- Astronomical Lighting Alarm
- Time Dependent Current Alarm
- Power Control Alarm
- Temperature Alarm

E-Mail / Sms

- Reactive Over-Limit Alarm
- Communication Error Alarm
- Power Failure Alarm
- Input Changes Alarm
- Temperature Alarm



www.yestakibi.com



Prevention of production losses thanks to the advanced alarm feature




Entire portfolio manage from a single screen

Easy access from anywhere thanks to the cloud system



Compatible with all inverter brands/models



INNOVATIVE SOLUTIONS IN RENEWABLE ENERGY SYSTEM

| | | |
|---|--|---------------------------------------|
| Name : Solar Classification : Sun PV Capacity : 1000 Address : Göynük/Bolu | ▲ Today's Production 68.88 KWh | ▲ Total Production 6.17 GWh |
|---|--|---------------------------------------|





SmartPower® PC is an economical solution with simpler features. Available with a one-time license. No monthly or annual subscription is required. Saves server and terminal costs. All you need is a computer with a USB / RS-485 converter. Since Ethernet communication is not required, it is not designed according to ethernet protocol.

The software was developed to help solve your basic energy problems. You can manage the energy of a large enterprise or manage only one measuring point.


SmartPower® PC is easy to set up and use. No modem or network connection required. Stores data on your computer. With a USB / RS-485 converter, you can start monitoring devices with serial connection.

With the current version of **SmartPower® PC** software, only power factor controllers and analyzers produced by Grup Arge can be monitored.

SmartPower® Web service is recommended for other brand devices and meter monitoring.

- Real-time data collection,
- Data reporting, graphing and document outputs in tabular form,
- Reporting between two selected dates,
- Consumed energy and instant values of the selected device,
- Ability to add Modbus compatible devices,
- Zone identification via port,
- Remote configuration of measuring devices,
- Ability to access the writable registers of the devices,
- Alarm identification (Reactive Limit Exceeding, Communication, Voltage),
- Desktop notifications for alarms,
- Instant monitoring of desired parameters of selected devices.

SmartPOWER® PC Operation

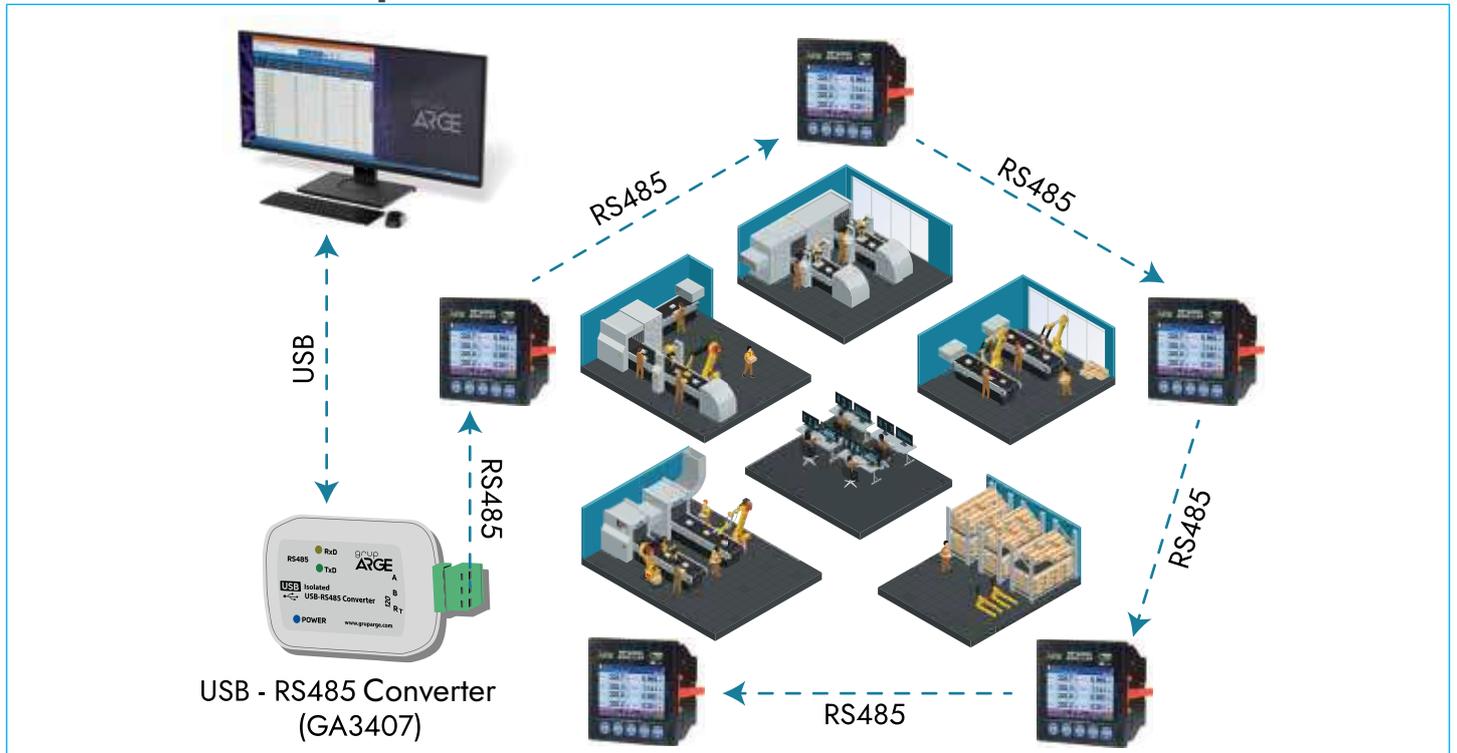

Feature Table

| Features | SmartPOWER® |
|-----------------------------|----------------------------|
| ANALYZER | Grup Arge* |
| POWER FACTOR CONTROLLER | Grup Arge* |
| SYSTEM PARAMETERIZATION | ✓ |
| RTU | ✓ |
| FRONT PANEL VIEW | ✓ |
| AUTOMATIC SCREEN UPDATE | ✓ |
| SEND COMMAND | ✓ |
| ALARM TYPES | 3 (Desktop Notification)** |
| PERIODIC VALUES | ✓ |
| ENERGY | ✓ |
| DATA OUTPUT (XLS, PDF, JPG) | ✓ |
| SELECT DATE AND TIME | ✓ |

***Grup Arge**

The current version only supports Grup Arge branded devices.

****Desktop Notification**

- Reactive Over Limit Alarm
- Communication Error Alarm
- Voltage Alarm

The 8 relay outputs on the device can be controlled remotely via Modbus RTU. It can be monitored remotely with **SmartPOWER®** modems and can also be integrated into other systems. COM terminal is the common terminal of the relay. When a relay is activated, the voltage connected to the COM terminal is output and the related output LED lights up. Loads up to 5 Amps can be switched directly from the relay output. If over 5 Amps current is to be drawn, it is necessary to control the load via a contactor. In this case, the relay output is used as the trigger signal of the contactor.

Note: It can also be integrated into any system (SCADA etc.) that supports Modbus RTU communication protocol.

Key Features

- Microprocessor based.
- **Output:** There are 8 relays with contact output current 5 A (230 V)
- **Communication Protocol:** RS-485 communication with Modbus RTU protocol.
- **Mounting:** It can be mounted on DIN rail.
- **LED Status:** LEDs indicating supply, fault, communication and output status.




OM C8A



Technical Features

| Product Code | Product Name | Product Description | Supply | Communication |
|--------------|--------------|-----------------------------|-------------|---------------|
| GA3401 | OM C8D | 8-OUTPUT MODULE (DC SUPPLY) | 9-30 V DC | RS-485 |
| GA3402 | OM C8A | 8-OUTPUT MODULE (AC SUPPLY) | 85-265 V AC | RS-485 |

Technical Drawing

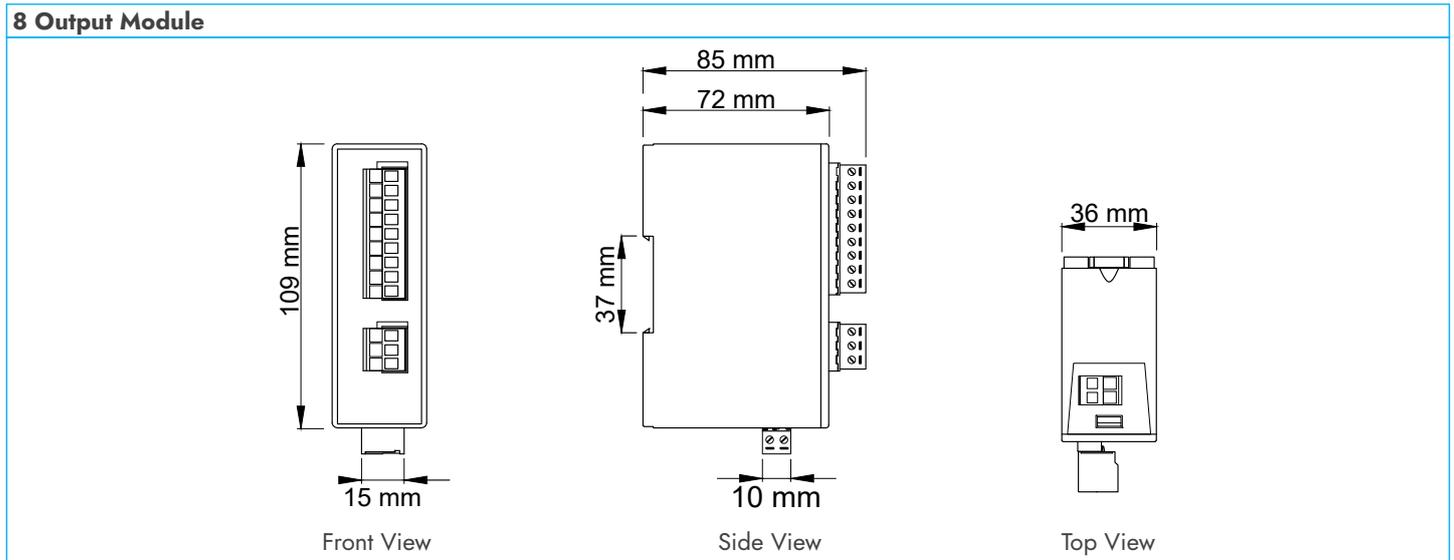

Connection Diagram

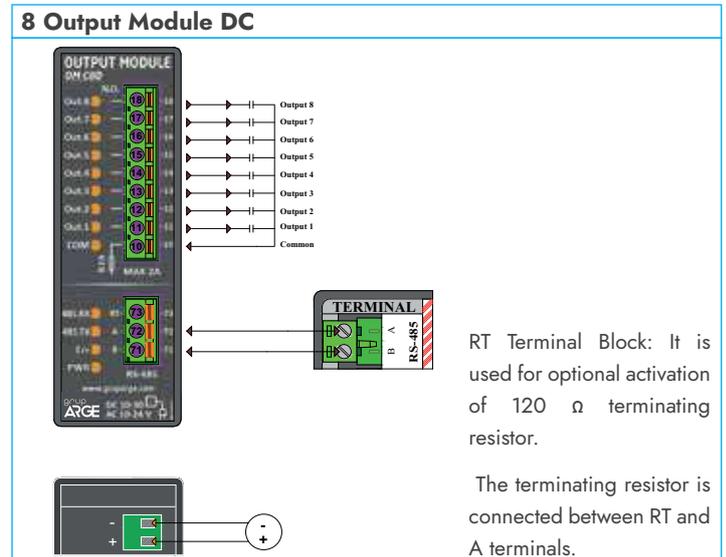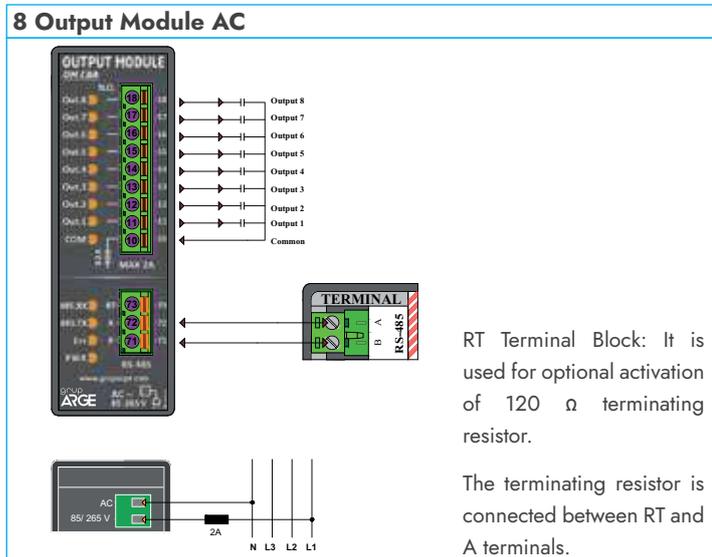

The device has been developed to provide remote monitoring of the status of 8 pieces of dry contact inputs via Modbus RTU. It can be monitored remotely with SmartPOWER® modems or can be integrated into other systems. One end of the dry contact to be monitored is connected to the COM terminal and the other end is connected to any of the inputs L1 - L8. In case of open contact, the related LED is off, while in case of closed contact, the related LED is on.

Note: It can also be integrated into any system (SCADA etc.) that supports Modbus RTU communication protocol.

Key Features

- Microprocessor based.
- **Input:** There are 8 relays with contact input current
- 5 A (230 V)
- **Communication Protocol:** RS-485 communication
- with Modbus RTU protocol.
- **Mounting:** It can be mounted on DIN rail.
- **LED Status:** LEDs indicating supply, fault, communication and input status.




Technical Features

| Product Code | Product Name | Product Description | Supply | Communication |
|--------------|--------------|----------------------------|-------------|---------------|
| GA3403 | OM G8D | 8-INPUT MODULE (DC SUPPLY) | 9-30 V DC | RS-485 |
| GA3404 | OM G8A | 8-INPUT MODULE (AC SUPPLY) | 85-265 V AC | RS-485 |


Technical Drawing

8 Input Module

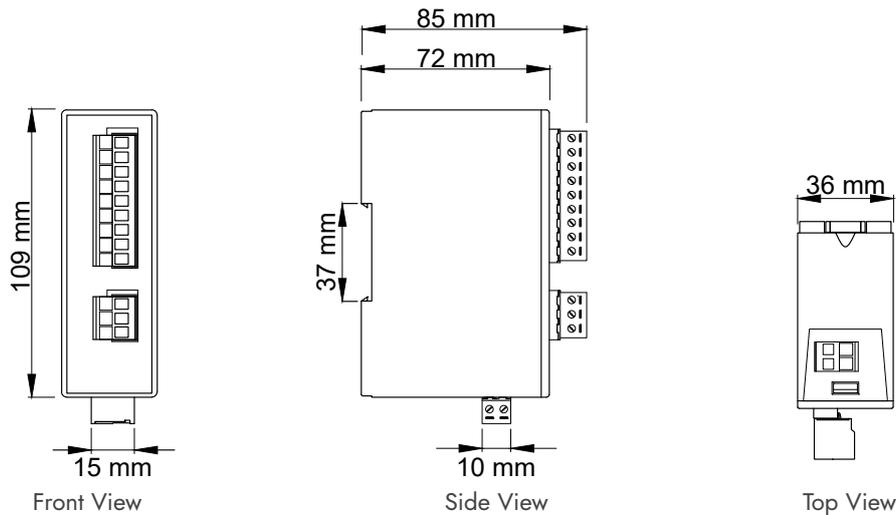

Connection Diagram


8 Input Module AC

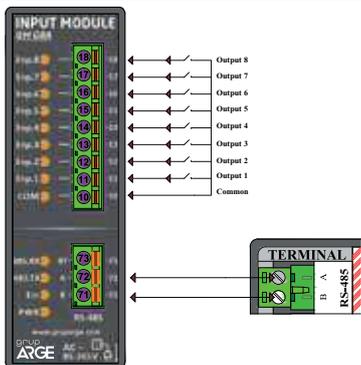

RT Terminal Block: It is used for optional activation of 120 Ω terminating resistor.

The terminating resistor is connected between RT and A terminals.

8 Input Module DC

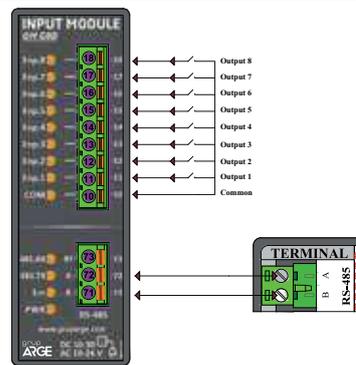

RT Terminal Block: It is used for optional activation of 120 Ω terminating resistor.

The terminating resistor is connected between RT and A terminals.

Analog Input Module Analog sensor data with 0-10 V DC and 4-20 mA DC output can be read via RS-485 line and Standard Modbus RTU protocol. The device can be mounted on the rail inside the panel.

Key Features

- Microprocessor based.
- **Supply:** It works with 9-30 Volt DC supply.
- **Communication Protocol:** Supports RS-485 Standard Modbus RTU protocol.

- **Input:** There are 3 pieces of 0-10 V DC analog sensor inputs. There are 3 pieces of 4-20 mA DC analog sensor inputs.
- **LED Status:** Power, Error, RS485 (Communication) LEDs.
- **Ambient Temperature:** It can operate at ambient temperatures between -10 °C and +60 °C
- **Supply Consumption Power:** <1 VA
- **Protection Class:** IP40.




OM AG


Technical Features

| Product Code | Product Name | Product Description | Supply | Communication |
|--------------|--------------|---------------------|-----------|---------------|
| GA3405 | OM AG | ANALOG INPUT MODULE | 9-30 V DC | RS-485 |

Technical Drawing

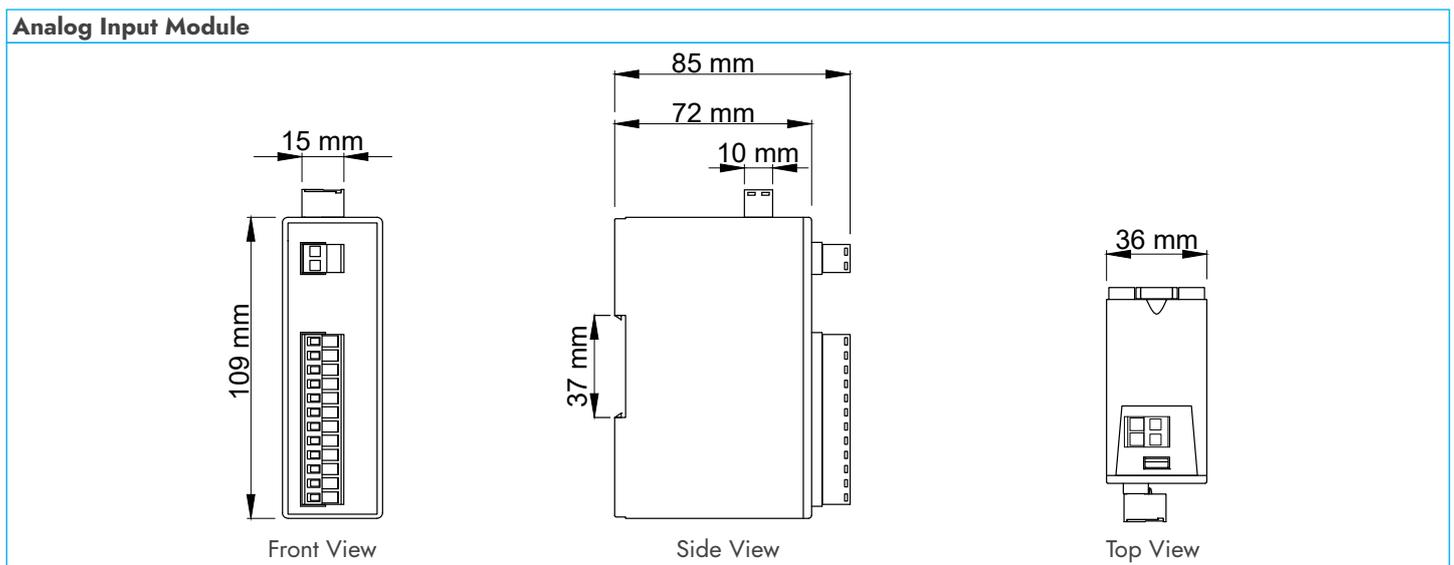

Connection Diagram

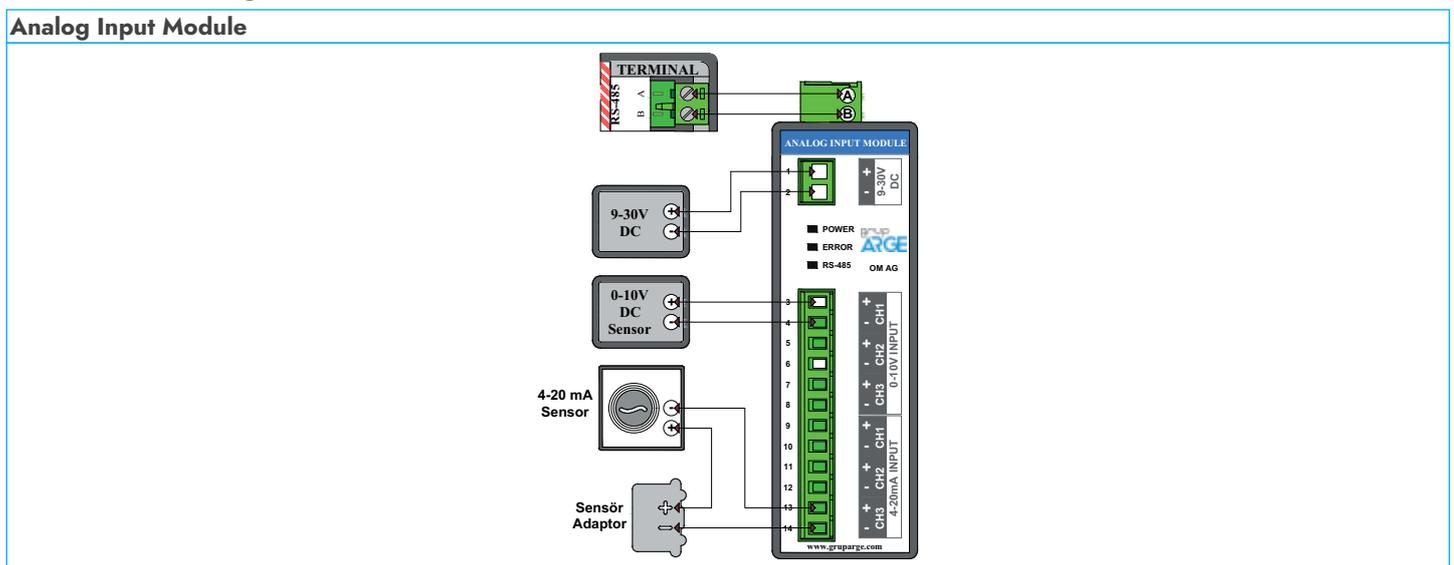

The heat and light meter device can be used with Ethernet terminal, GSM automation terminal and GSM terminal. When measuring ambient variables such as temperature and light intensity, it enables the device to be turned on or off at specified value intervals through the output module.

Key Features

• **Communication:** RS-485 (Standard Modbus RTU).

- **Supply:** 12 V DC
- **Cable Cross Section:** 4x0.22 mm²
- **Temperature Measurement Range:** -55 °C to +150 °C
- **Light Intensity Measurement Range:** 01-10.000 lux
- **Connection Type:** Terminal connection.
- **Weight:** 40gr (with cable).




OM ISI

Technical Features

| Product Code | Product Name | Product Description | Supply | Communication |
|--------------|--------------|---------------------|---------|---------------|
| GA3406 | OM ISI | HEAT - LIGHT METER | 12 V DC | RS-485 |

Connection Diagram

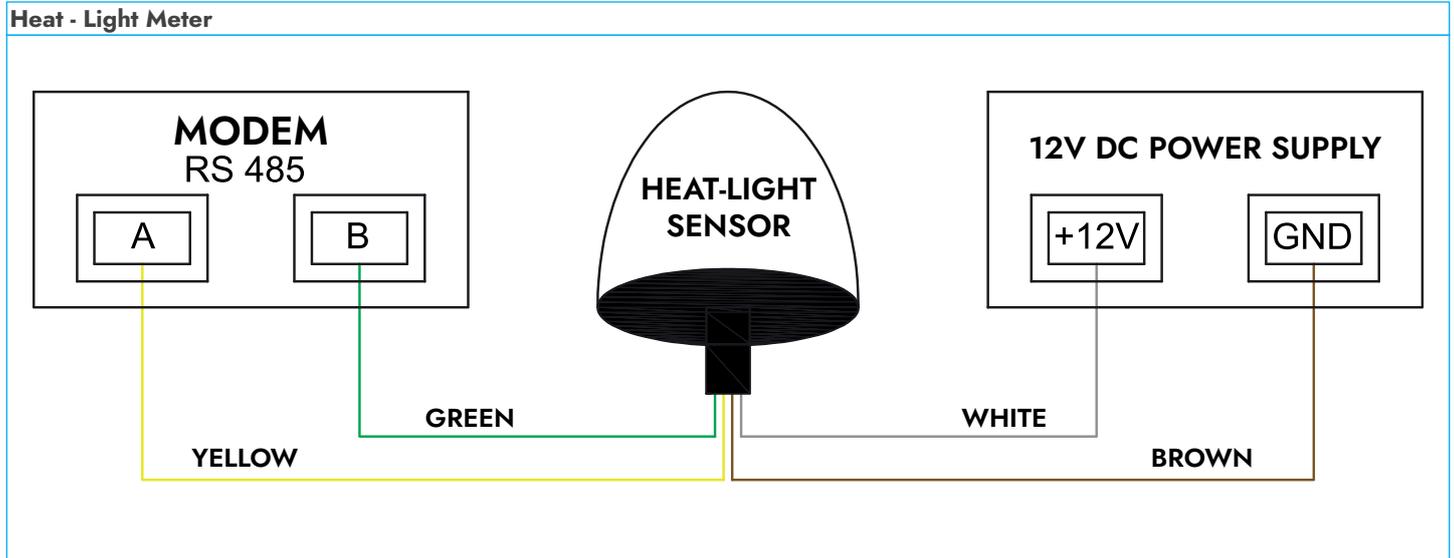

It is used as a USB to RS 485 converter to exchange data with the device or devices that communicate with the PC (USB port) via RS 485

Key Features

- It is microprocessor based.
- **Port:** It has the ability to work via USB (mini) port (2.0 support).
- **Isolated Communication:** It has a maximum of 500 kbps isolated communication (1.5 kV voltage isolation) feature.

- **Number of Communicating Devices:** RS-485 communication, it can convert the data of 32 devices at the same time.
- **LED Status:** It has Power, RS-485 Communication RX and TX LEDs.
- **Terminator:** The device has a built-in 120Ω terminator. If desired, the internal terminating resistor can be activated with Rt terminal connection.
- **Ambient Temperatures:** It can operate at ambient temperatures between -10 °C and +60 °C
- **Supply Consumption Power:** < 1 VA
- **Protection Class:** IP40




OM USB485


Technical Features

| Product Code | Product Name | Product Description | Communication |
|--------------|--------------|--------------------------------------|---------------|
| GA3407 | OM USB485 | USB-RS485 CONVERTER (1.5kV isolated) | USB/RS-485 |

Technical Drawing

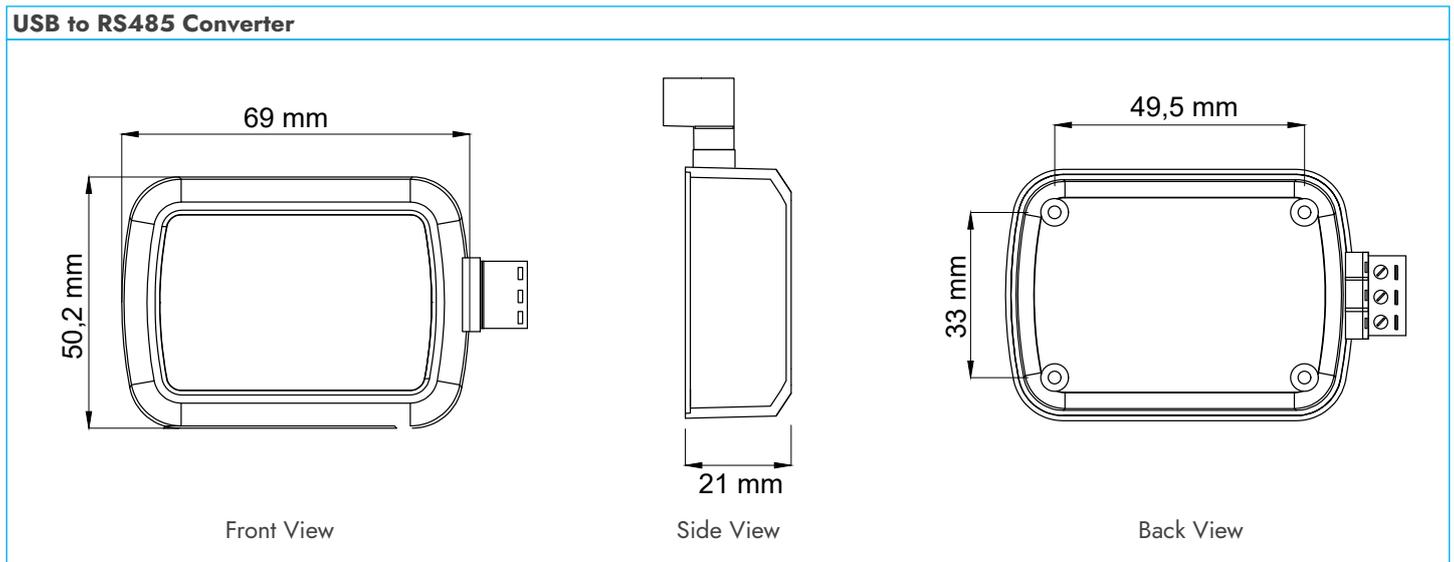

Connection Diagram

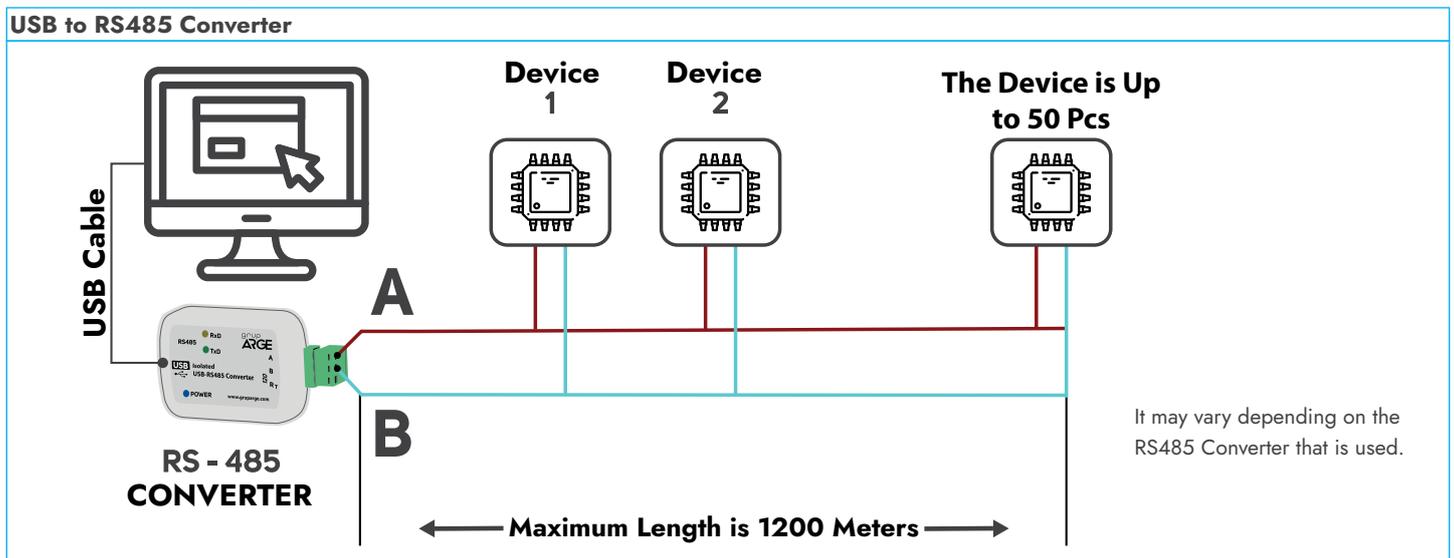

With 6 counter inputs, it simultaneously counts and records pulse output counters separately. Data can be read and edited via Modbus RTU protocol with RS-485 line. Time-based counting operations can be performed with the clock chip on it.

Key Features

- It is microprocessor based.
- **Supply:** It works with 9-30 V DC supply.

- **Communication Protocol:** RS-485 Supports standard MODBUS RTU protocol.
- **Input:** 6 pulse inputs are available.
- **LED Status:** It has POWER (Power), ERROR (Error), RS-485 (Communication) LEDs.
- **Operating Ambient Temperature of the Device:** -10 °C to +55 °C
- **Supply Consumption Power:** Less than 1 VA
- **Protection Class:** IP40 protection class




OM PALS


Technical Features

| Product Code | Product Name | Product Description | Supply | Communication |
|--------------|--------------|---------------------|-----------|---------------|
| GA3408 | OM PALS | PALS COUNTER | 9-30 V DC | RS-485 |

Technical Drawing

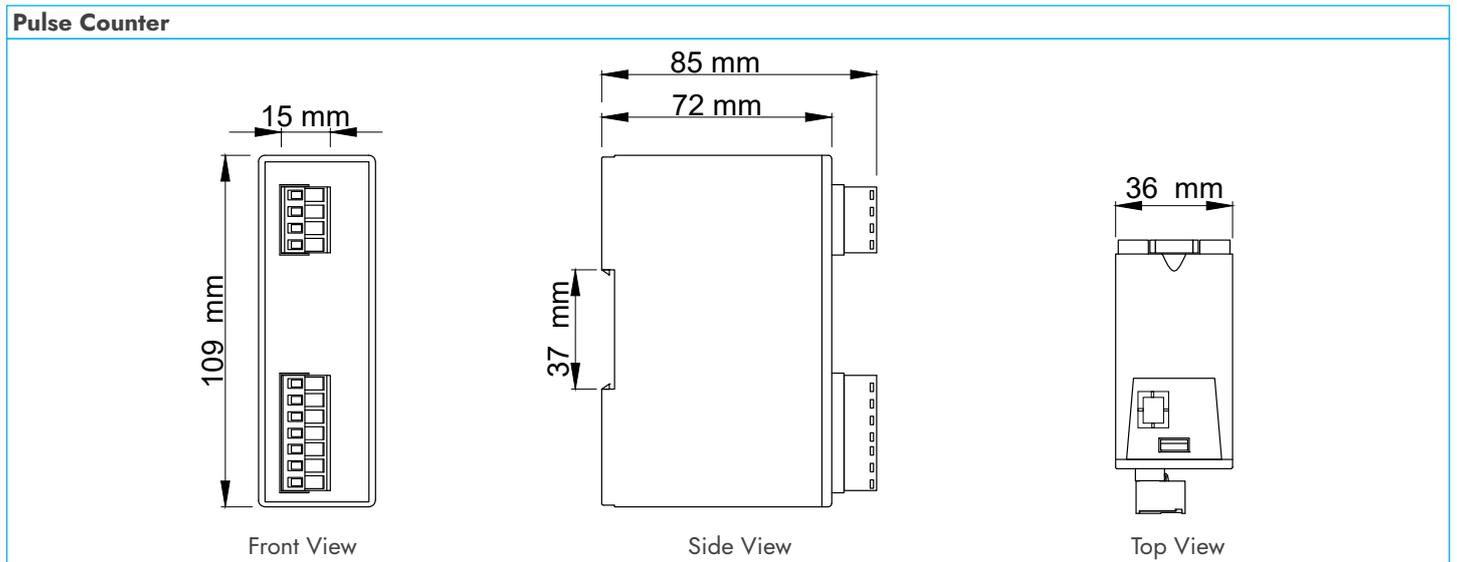

Connection Diagram

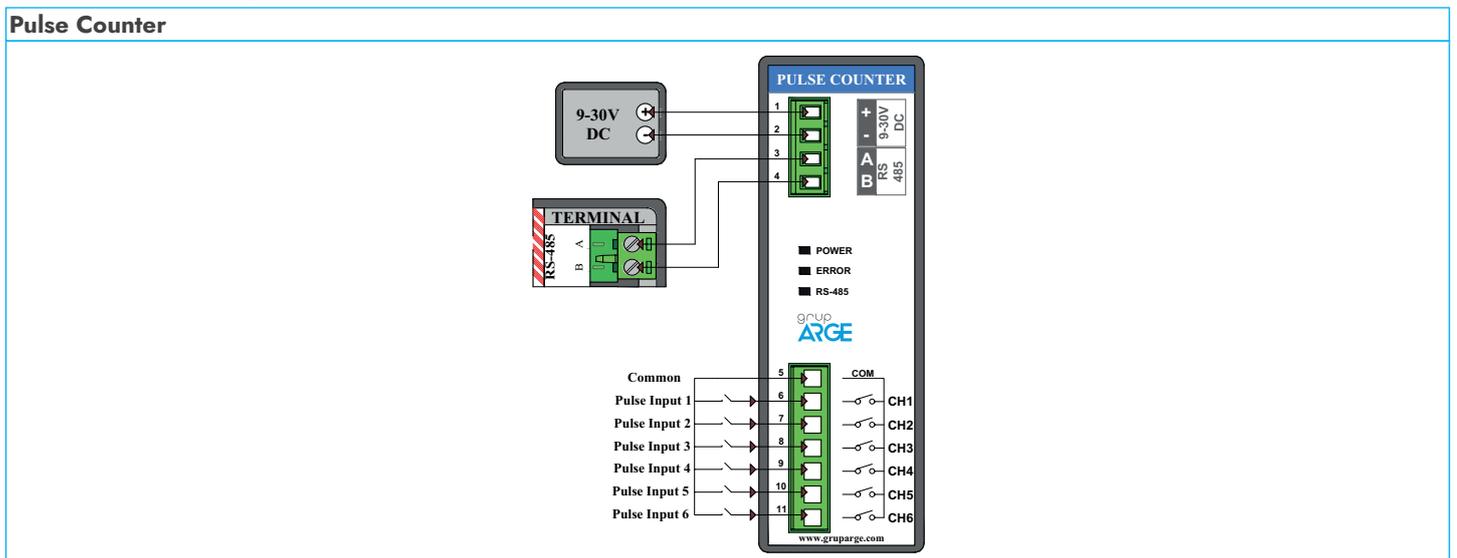



CONTROL AND PROTECTION



Astronomical Time Relays

AST01 is a digital time relay with a real time clock that automatically calculates the sunrise and sunset times. AST01 is designed to control the devices connected to its contact according to the set days and hours of the week, as well as the set sunrise or sunset times. Thanks to the NFC antenna on the device, device configuration/programming can be done via a smartphone with the TouchConfig mobile application. Through this application, 32 different programs can be created and installed on the device.

Time Relays

Electronic time relays are microprocessor-based devices used in time critical processes. These devices are specially designed to activate or deactivate a circuit or a system within the set time and function. This relay group, which is generally used in the control panels of power circuits, can control the system by changing the relays positions basically with or without delay.

Voltage Protection Relays

They are devices used to protect motors and systems against neutral breakage, phase absence, high voltage, low voltage and phase sequence faults.

Phase Protection Relays

They are devices used to prevent the motors from being damaged by overheating due to the absence of phase or voltage imbalance and to prevent problems that may arise from phase sequence error. There are types operating according to fixed or adjustable asymmetry.

| | |
|---------------------------|----|
| Astronomical Time Relays | 90 |
| Time Relays | 91 |
| Voltage Protection Relays | 93 |
| Phase Protection Relays | 94 |

NEW PRODUCT



Programming with Android and iOS Supported with NFC Feature

24 Hour Time Setting

Automatic Coordinate Selection from City List

DIN1 Rail Mounting


*Pre-installation Programming

*Thanks to the NFC feature, it can be programmed without powering the device through the set profile.


Technical Features

| Product Code | Product Name | Product Description | Replaceable Battery | 24 Hour Time Setting | Automatic Coordinate Selection from City List | Operating Voltage | Operating Frequency | Number of Programs | Programming Interface | Supported Platforms | Relay Output | Dimensions W x H x D (mm) | Parcel Quantity |
|--------------|--------------|-----------------------------------|---------------------|----------------------|---|-------------------|---------------------|--------------------|-----------------------|---------------------|--|---------------------------|-----------------|
| GA8151 | AST01 | NFC ENABLED ASTRONOMIC TIME RELAY | ✓ | ✓ | ✓ | 12-240 V AC/DC | 50-60 Hz | 32 | NFC | Android iOS | R1 output (NO)/ 10A 250V AC R2 output (NC) / 6A 277V AC | 18,5 x 91 x 57 | 10 |

Technical Drawing

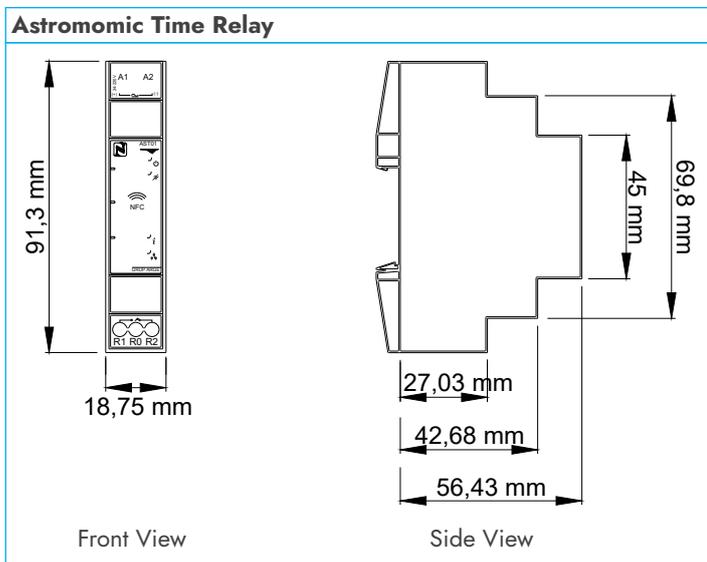

Connection Diagram

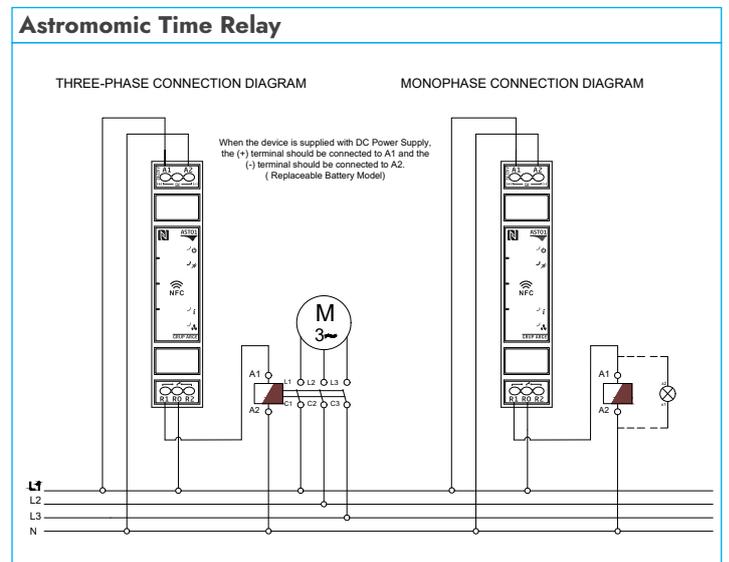


Technical Features

| Product Code | Product Name | Product Description | Time Interval | Contact Output | | Trigger | Neutral Triggered | 24V AC / DC | 220 V AC | Delayed on Pull | Delayed on Release | Open Flasher | Closed Flasher | Symmetric Flasher | Star-Delta | Control Input Delayed on Pull | Delayed Drop On Falling Edge Pull On Rising Edge | Delayed On Trigger Pull 1 | Second Delayed In Pulse | Triggere Release | Trigger Floor Automatic | Smart Test Mode | |
|--------------|--------------|-----------------------------------|---------------------------|-------------------|-------------------|---------|-------------------|-------------|----------|-----------------|--------------------|--------------|----------------|-------------------|------------|-------------------------------|--|---------------------------|-------------------------|------------------|-------------------------|-----------------|--|
| | | | | 1C/O, 5A, 1250 VA | 2N/O, 5A, 1385 VA | | | | | | | | | | | | | | | | | | |
| GA8101 | ZMN01 | TIME RELAY (0.1 sec-30 sec) | 0.1 sec - 30 sec | ✓ | | | | ✓ | ✓ | ✓ | | | | | | | | | | | | | |
| GA8102 | ZMN02 | TIME RELAY (0.1 sec-60 sec) | 0.1 sec - 60 sec | ✓ | | | | ✓ | ✓ | ✓ | | | | | | | | | | | | | |
| GA8103 | ZMN03 | TIME RELAY (0.1 sec-30 h) | 0.1 sec - 30 hours | ✓ | | | | ✓ | ✓ | ✓ | ✓ | | | | | | | | | | | | |
| GA8104 | ZMN04 | TIME RELAY (0.1 sec-999 min) | 0.1 sec - 999 min | ✓ | | | | ✓ | ✓ | ✓ | ✓ | | | | | | | | | | | | |
| GA8111 | ZMN11 | FLASHER RELAY | 0.1 sec - 30 hours | ✓ | | | | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | | | | | | | | | |
| GA8121 | ZMN21 | MULTIFUNCTIONAL TIME RELAY | 0.1 sec - 99 hours | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | | | | |
| GA8131 | ZMN31 | LEFT-RIGHT TIME RELAY (OFF START) | 0.1 sec - 30 hours | | ✓ | | | ✓ | ✓ | ✓ | | | | | | | | | | | | | |
| GA8132 | ZMN32 | STAR DELTA TIME RELAY | Y-U:20-600ms Y:1-60sec | | ✓ | | | ✓ | ✓ | | | | | ✓ | | | | | | | | | |
| GA8141 | ZMN41 | FIRE/FLOOR AUTOMAT | 0.1 sec - 8 min | ✓ | | ✓ | | ✓ | ✓ | | | | | | | | | | | | ✓ | ✓ | |












ZMN01

Technical Drawing

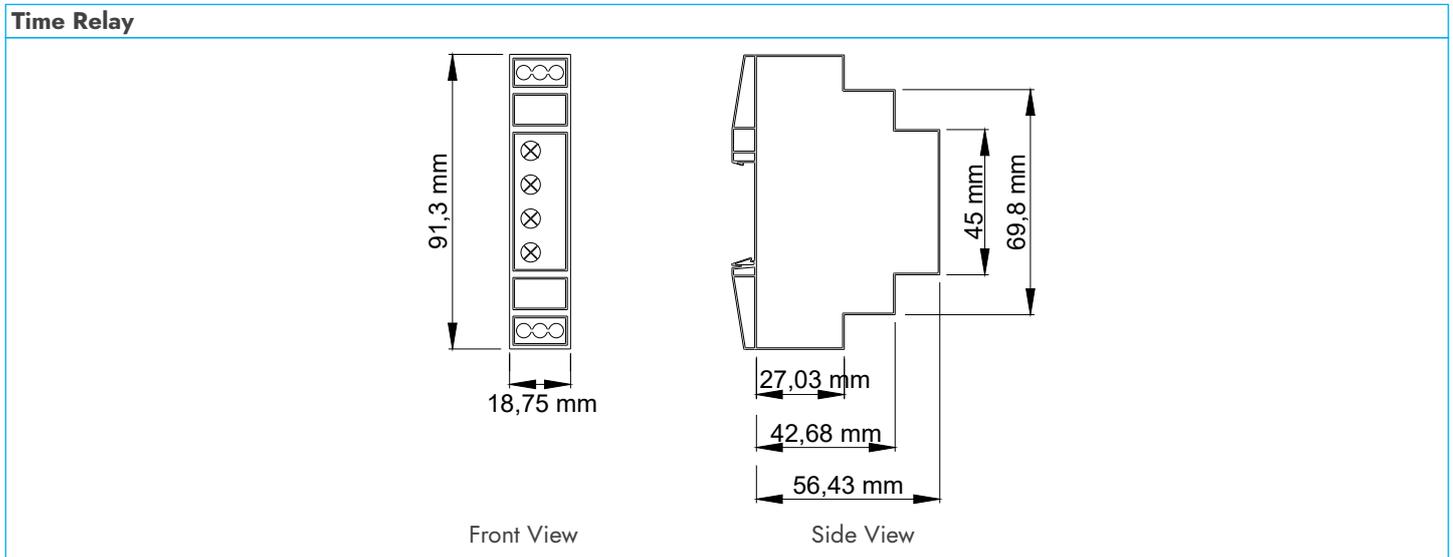

Connection Diagram

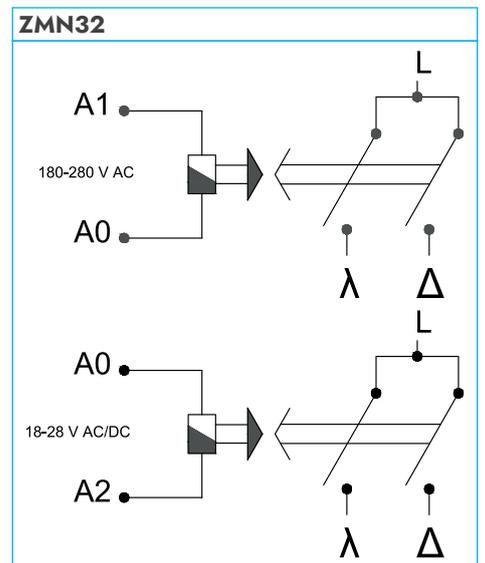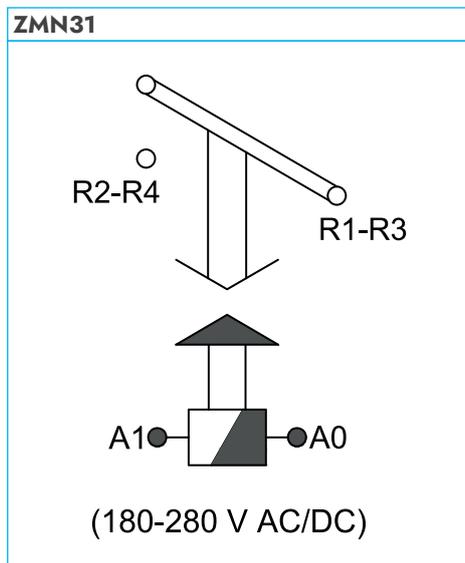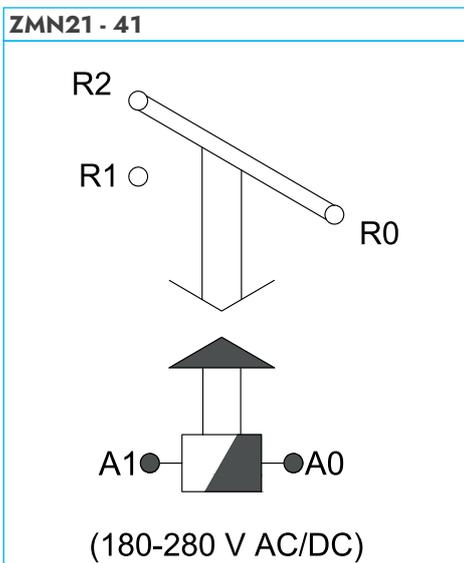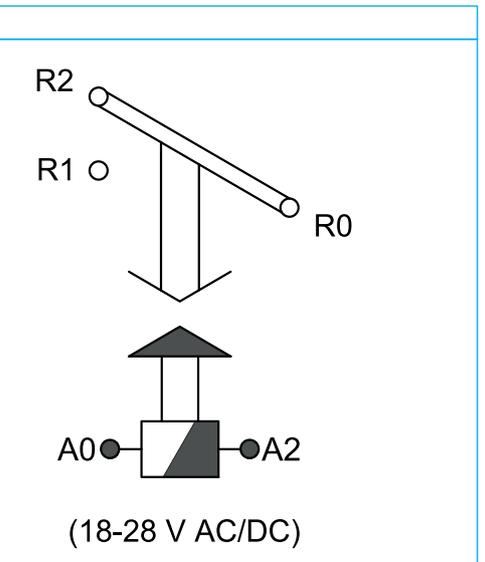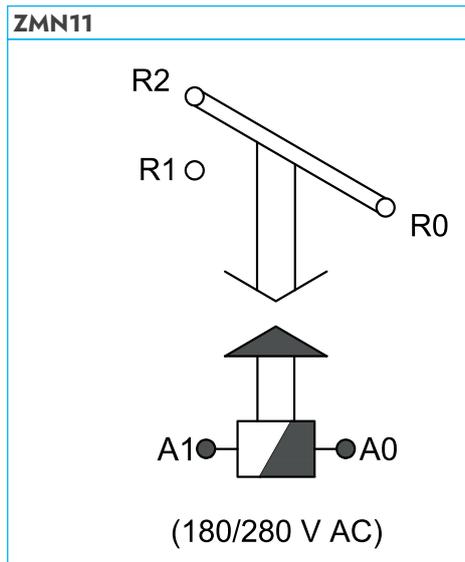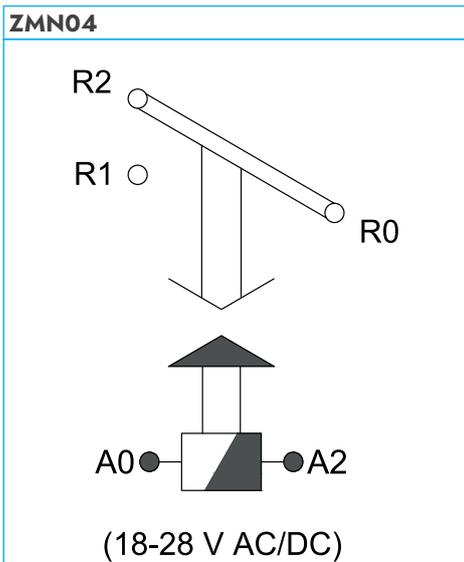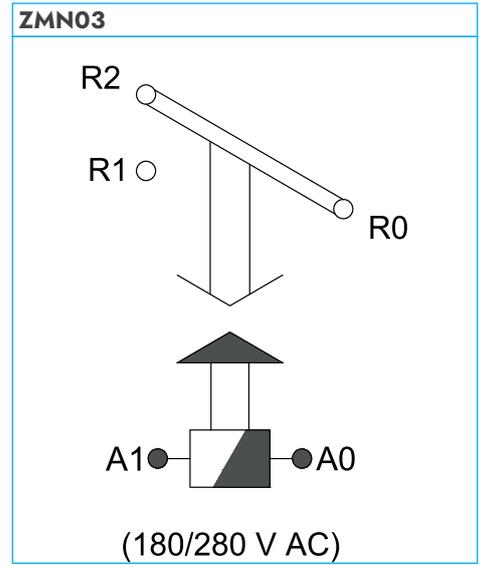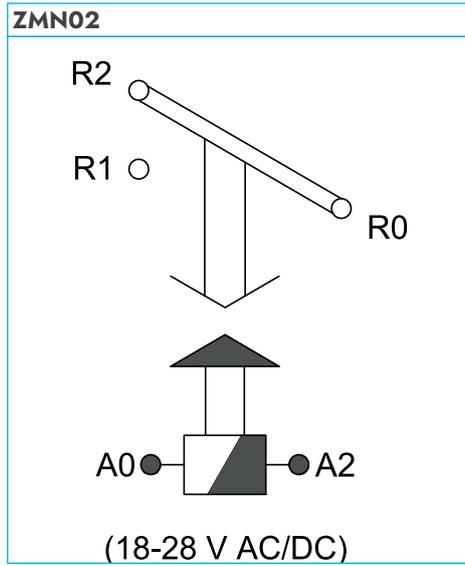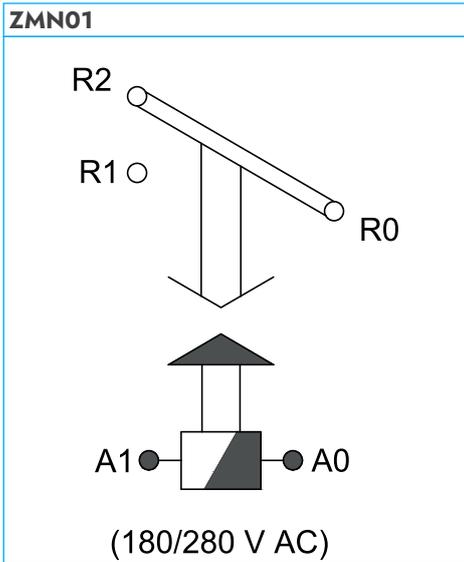


Technical Features

| Product Code | Product Name | Product Description | Contact Output | | Neutral Connection | Non-Neutral Connection | Neutral Break Detection | Three-Phase Usage | Mono-Phase Usage | Phase Sequence Control | Phase Absence Detection | High Voltage Control | Over Voltage Instant-on Protection | Low Voltage Control | Low Voltage Instant-on Protection | Adjustable on Delay | Insufficient - Overfeed Warning | Neutral - Phase Reverse Warning | Dial | Supply |
|--------------|--------------|---|----------------|---|--------------------|------------------------|-------------------------|-------------------|------------------|------------------------|-------------------------|----------------------|------------------------------------|---------------------|-----------------------------------|---------------------|---------------------------------|---------------------------------|-------------|-----------------|
| | | | Output | | | | | | | | | | | | | | | | | |
| GA8201 | GRL01 | VOLTAGE PROTECTION RELAY (MONOPHASE COMPATIBLE) | ✓ | ✓ | | | ✓ | ✓ | | ✓ | A | ✓ | A | ✓ | ✓ | ✓ | ✓ | | Monophase | 3 Phase-Neutral |
| GA8202 | GRL02 | VOLTAGE PROTECTION RELAY (THREE-PHASE COMPATIBLE) | ✓ | ✓ | | | ✓ | ✓ | | ✓ | A | ✓ | A | ✓ | ✓ | ✓ | ✓ | | Three-phase | 3 Phase-Neutral |
| GA8203 | GRL03 | PHASE SEQUENTIAL VOLTAGE PROTECTION RELAY | ✓ | ✓ | | | ✓ | ✓ | ✓ | ✓ | A | ✓ | A | ✓ | ✓ | ✓ | ✓ | | Three-phase | 3 Phase-Neutral |
| GA8211 | GRL11 | NON-NEUTRAL VOLTAGE PROTECTION RELAY | ✓ | | ✓ | | ✓ | | | ✓ | A | ✓ | A | ✓ | ✓ | ✓ | ✓ | | Three-phase | 3 Phase |
| GA8212 | GRL12 | NON-NEUTRAL PHASE SEQUENTIAL VOLTAGE REALY | ✓ | | ✓ | | ✓ | ✓ | ✓ | ✓ | A | ✓ | A | ✓ | ✓ | ✓ | ✓ | | Three-phase | 3 Phase |






A: It can be adjustable and can be switched off.

Technical Drawing

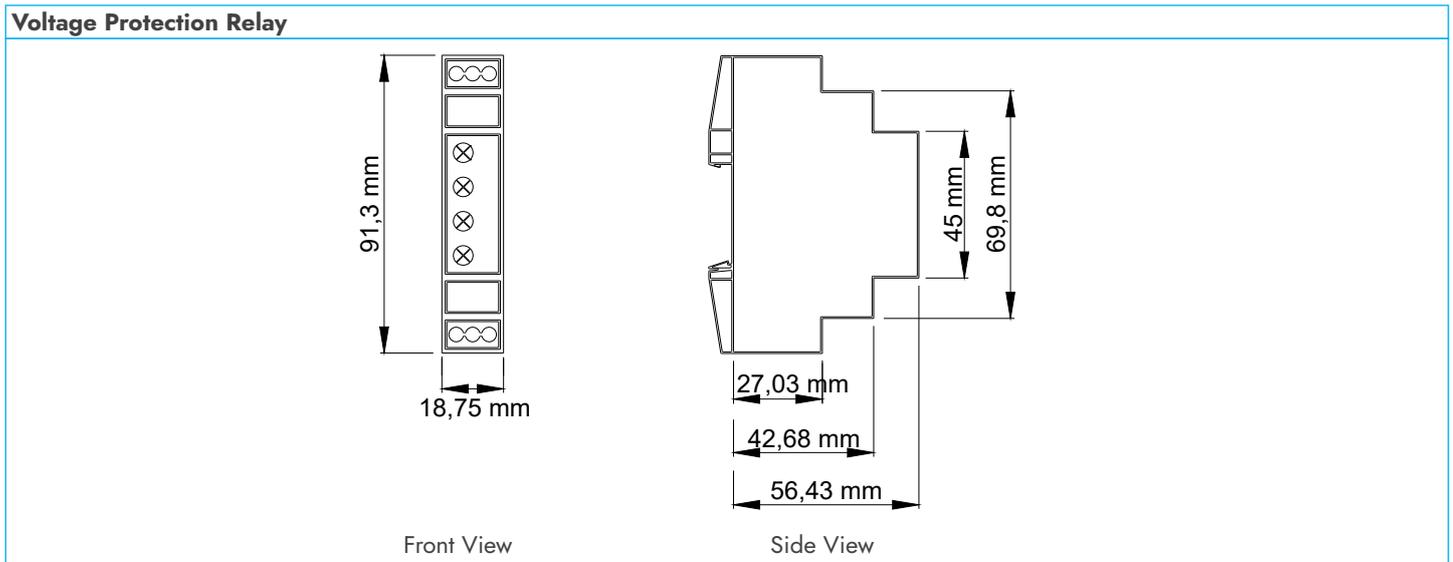

Connection Diagram

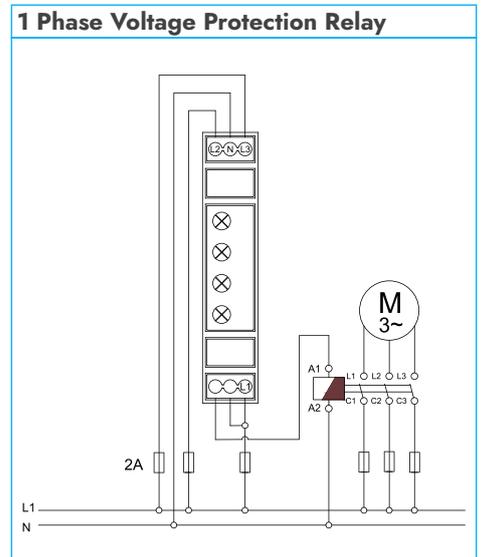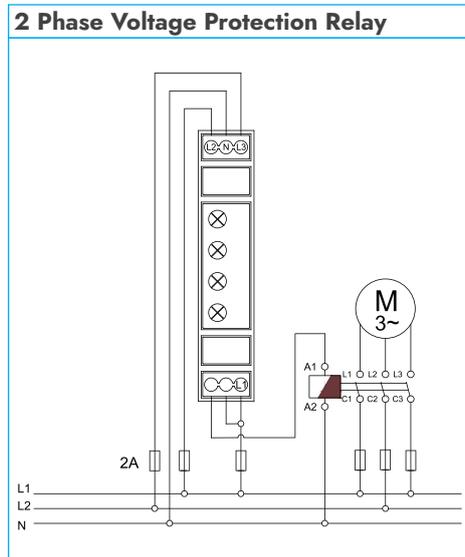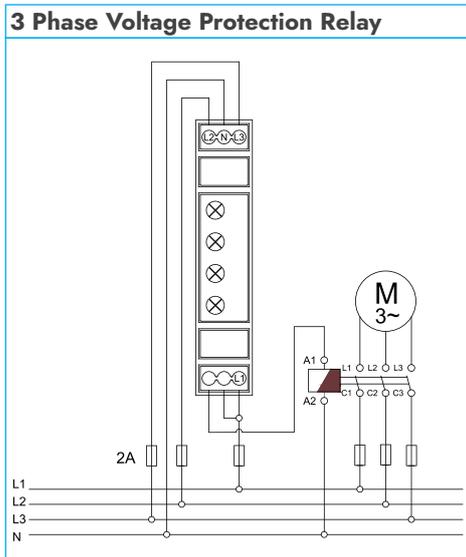

Technical Features

| Product Code | Product Name | Product Description | Contact Output | Neutral Connection | Non-Neutral Connection | Neutral break Detection | Neutral break Detection | Phase Sequence Control | Fixed Asymmetry | Adjustable Asymmetry | Adjustable Pull delay | Adjustable on Delay | Insufficient - Overfeed Warning | Low Voltage Control | High Voltage Control | Supply |
|--------------|--------------|---|-------------------|--------------------|------------------------|-------------------------|-------------------------|------------------------|-----------------|----------------------|-----------------------|---------------------|---------------------------------|---------------------|----------------------|-----------------|
| | | | 1N/0, 5A, 1385 VA | | | | | | | | | | | | | |
| GA8301 | FAZ01 | PHASE PROTECTION RELAY (20% ASYMMETRY) | ✓ | ✓ | ✓ | ✓ | ✓ | 20% | | | | ✓ | | | | 3 Phase-Neutral |
| GA8302 | FAZ02 | PHASE PROTECTION RELAY (5-35% ADJUSTABLE ASYMMETRY) | ✓ | ✓ | ✓ | ✓ | ✓ | | 5-35% | ✓ | ✓ | ✓ | | | | 3 Phase-Neutral |
| GA8303 | FAZ03 | PHASE SEQUENTIAL PHASE PROTECTION RELAY 40% ASYMMETRY) | ✓ | ✓ | ✓ | ✓ | ✓ | 40% | | | | ✓ | | | | 3 Phase-Neutral |
| GA8304 | FAZ04 | PHASE SEQUENTIAL PHASE PROTECTION RELAY (5-35% ADJUSTABLE ASYMMETRY) | ✓ | ✓ | ✓ | ✓ | ✓ | | 5-35% | ✓ | ✓ | ✓ | | | | 3 Phase-Neutral |
| GA8311 | FAZ11 | NON-NEUTRAL PHASE SEQUENTIAL PHASE PROTECTION RELAY (5-40% ADJUSTABLE ASYMMETRY) | ✓ | | ✓ | ✓ | ✓ | | 5-40% | | | ✓ | | | | 3 Phase |
| GA8312 | FAZ12 | NON-NEUTRAL PHASE SEQUENTIAL PHASE PROTECTION RELAY (5-35% ADJUSTABLE ASYMMETRY) | ✓ | | ✓ | ✓ | ✓ | | 5-35% | ✓ | ✓ | ✓ | | | | 3 Phase |
| GA8313 | FAZ13 | VOLTAGE-CONTROLLED NON-NEUTRAL PHASE SEQUENTIAL PHASE PROTECTION RELAY (5-40% ADJUSTABLE ASYMMETRY) | ✓ | | ✓ | ✓ | ✓ | | 5-40% | | ✓ | ✓ | | A | A | 3 Phase |




FAZ12

A: It can be adjustable and can be switched off.


Technical Drawing

Phase Protection Relay

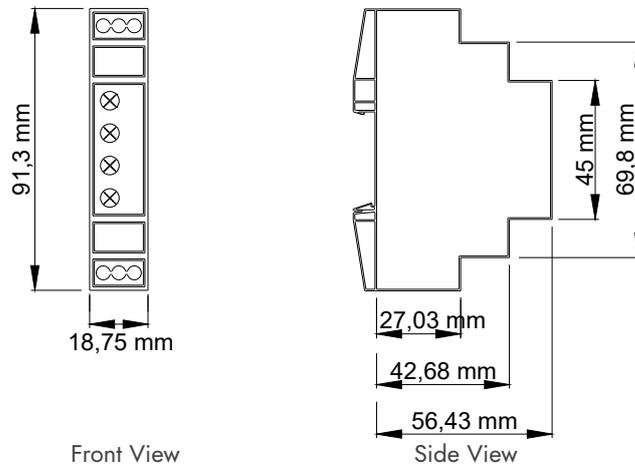

Connection Diagram

Phase Protection Relay

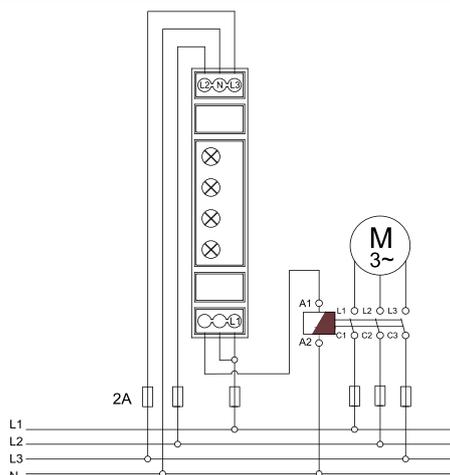



*Please scan the QR code to view all our quality certificates and documents.



grup
ARGE

**INNOVATIVE SOLUTIONS IN
COMPENSATION AND ENERGY
EFFICIENCY**

